TABLE OF CONTENT

DRIVE AND CONTROLS 1

CAPACITORS 1

START CAPACITORS 1
- 110-125 VOLTS ROUND AC 50/60 HZ 1
- 220-250 VOLTS ROUND AC 50/60 HZ 1

RUN CAPACITORS 2
- 370 OVAL 50/60 HZ 2
- 440 OVAL 2
- 370 ROUND 2

CONTACTORS 3

DRIVES/VFD 4
- AQUAVAR 4
- WEG-CFW 6
- YASKAWA iQpump Controller 7

MAGNETIC STARTER 8

OVERLOADS 9

PHASE MONITOR 9

RELAYS 10

SOFT START 10
- SSW03 SERIES 10
- SSW04 SERIES 11
- SSW05 SERIES 12

IRRIGATION 15

ACCESSORIES 15
- FLOATING DUCK 15
- IRRIGATION WIRE 15
- WIRE CONNECTORS 15
- MARKING FLAG 16
- PVC CEMENT 16
- CUTTERS 17
- HACKSAW 18
- SHOVELS 18
- WRENCH 18
- VALVE BOX 18

CONTROL TIMERS 19
- POOL TIMERS 19
- PUMP STARTER (PUMP RELAY) 19
- RAIN SENSOR 19
- IRRIGATION TIMERS 20

DRIP IRRIGATION 23
- FLEXIBLE PIPE BROWN 23
- QB2 BUBBLER 23
- QUADRA BUBBLER 23
- T-FILTER 23
- Y-FILTER 24
- AQUA JET ONE PIECE 24
- PVC NURSERY HEAD 24
- FOGGER HEADS 24
- ROTOR SPRAY (MICRO SPINNER) 24

FUNNY PIPE/FITTING 25

PVC PIPE/FITTINGS 25

RUST CONTROL SYSTEM 25
- FORMULAS 25
- CHEMICAL FEED INJECTS 26

SPRINKLER HEAD 26
- IMPACT 26
- NOZZLES 27
- POP UPS 33
- ROTORS 34

VALVES 36
- ELECTRIC VALVES 36
- HIDRAULIC VALVES 37
- INDEXING VALVES 37

PUMP STATIONS 39

DOMESTIC WATER 39
- BOOSTER SYSTEMS 39

IRRIGATION 39
- BLUE CUBE 39

PUMPS 41

ACCESSORIES 41
- BASKET STRAINER 41
- SUCTION ADAPTORS 42
- IN-LINE STRAINER 43
- DIAPHRAGM PUMP (HAND) 43
- FLOAT SWITCH 43
- PRESSURE GAUGE 44
- PRESSURE SWITCH 44
- PUMP CONNECTOR 44
- PUMP COVERS 45

CENTRIFUGAL PUMPS 46
- 316SS PUMPS 46
- FLANGED PUMPS 49
- IN LINE PUMPS 54
- MULTISTAGE PUMPS 54
- SPLIT-CASE PUMPS 57
- THREADED PUMPS 57

GASOLINE/DIESEL 59

IN-LINE CIRCULATOR 60

IRRIGATION 61
- ACCESSORIES 61
- JET PUMPS 61
- SELF-PRIMMING PUMPS 70

POOL PUMPS 75
- ACCESSORIES 75

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

TABLE OF CONTENT

POOL PUMPS 76
SPA-PUMPS 80
PRESSURE TANK 81

SEWAGE /SUMP 82
ACCESSORIES 82
DEWATERING 84
EFFLUENT 88
GRINDER 89
PACKAGED SYSTEMS 92
SEWAGE 92

VALVES 103

BALL VALVES 103
BRASS 103
PVC 103

BUTTERFLY VALVES 104
LUG STYLE VALVE 104
THROUGH BOLT VALVE 104

CHECK VALVES 105
BRASS 105
FLANGED 107
FOOT 107
PVC 107
SPLIT DISC 108
WAFFER 109

GATE VALVES 109
FLANGED 109
THREADED 110

PRESSURE REDUCE VALVE 110
910-01 CV 110
CLA-VAL 110

PRESSURE RELIEF VALVE 111

PRESSURE VACUUM BREAKER 111

ELECTRIC MOTORS 113

ABOVE NEMA 113

COMPRESSOR DUTY 113
A.O.SMITH 113
WEG 113

CRUSHER DUTY 113

EXPLOSION PROOF 114

GENERAL PURPOSE 114
THREE PHASE 114

HVAC MOTORS 115
BLOWERS MOTORS 115
CONDENSED FAN MOTORS 115

IEC MOTORS 115

PUMP MOTORS 116
56 J FRAME MOTOR 116
56 Y FRAME MOTOR 117
CFACE MOTOR 119
CFRAME MOTOR 120
JM MOTOR 120
JP MOTOR 122
SPA MOTOR 123
TCZ MOTOR 123
VERTICAL HOLLOW SHAFT MOTOR 124
WASHDOWN DUTY/SHARK MOTOR 124

ACEPUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

DRIVE AND CONTROLS

CAPACITORS

START CAPACITORS

These are dry, electrolytic, non-polarized types, the round cases are made of moisture and oil resistant molded phenolic resin or plastic.

110-125 VOLTS ROUND AC 50/60 HZ

DESCRIPTION	PART NUMBER
CAPACITOR 125V MFD 1000-1200	PMJ1000
CAPACITOR 125V MFD 108-130	PMJ108
CAPACITOR 125V MFD 124-149	PMJ124
CAPACITOR 125V MFD 130-156	2510
CAPACITOR 125V MFD 145-174C	2511
CAPACITOR 125V MFD 161-193	PMJ161
CAPACITOR 125V MFD 189-227	PMJ189
CAPACITOR 125V MFD 216-259	2514
CAPACITOR 125V MFD 233-280	PMJ233
CAPACITOR 125V MFD 270-324	PMJ270
CAPACITOR 125V MFD 324-388	PMJ324
CAPACITOR 125V MFD340-408	2518
CAPACITOR 125V MFD 378-445	PMJ378
CAPACITOR 125V MFD 400-480	PMJ400
CAPACITOR 125V MFD 460-552	2521
CAPACITOR 125V MFD 540-648	2522
CAPACITOR 125V MFD 708-850	PMJ708
CAPACITOR 125V MFD 829-995	2525

220-250 VOLTS ROUND AC 50/60 HZ

DESCRIPTION	PART NUMBER
CAPACITOR 250V MFD 108-130	PTMJ108
CAPACITOR 250V MFD 124-149	PTMJ124
CAPACITOR 250V MFD 145-174	2550
CAPACITOR 250V MFD 161-193	2551
CAPACITOR 250V MFD 189-227	2552
CAPACITOR 250V MFD 21-25	2540
CAPACITOR 250V MFD 216-259	PTMJ216
CAPACITOR 250V MFD 25-30	2541
CAPACITOR 250V MFD 270-324	2555
CAPACITOR 250V MFD 30-36	2542
CAPACITOR 250V MFD 72-88	PTMJ64
CAPACITOR 250V MFD 88-106	PTMJ88

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl
created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DRIVE AND CONTROLS

RUN CAPACITORS

Metal cases, Metallized Film, Oil filled, Non PBC Oil, Four Blade Quick Connect Terminals, Insulate Terminals.

370 OVAL 50/60 HZ

DESCRIPTION	PART NUMBER
CAPACITOR 370V OVAL MFD 12.5	2407
CAPACITOR 370V OVAL MFD 17.5	2409
CAPACITOR 370V OVAL MFD 30+5 **DUAL RUN** *	2481
CAPACITOR 370V OVAL MFD 35+5 **DUAL RUN** *	POCD355
CAPACITOR 370V OVAL MFD 10	POC10
CAPACITOR 370V OVAL MFD 2	POC2
CAPACITOR 370V OVAL MFD 20	2410
CAPACITOR 370V OVAL MFD 25	2411
CAPACITOR 370V OVAL MFD 3	POC3
CAPACITOR 370V OVAL MFD 30	2412
CAPACITOR 370V OVAL MFD 4	POC4
CAPACITOR 370V OVAL MFD 40	2414
CAPACITOR 370V OVAL MFD 45	2415
CAPACITOR 370V OVAL MFD 5	2403
CAPACITOR 370V OVAL MFD 50	2416
CAPACITOR 370V OVAL MFD 7.5	POC75

* **Dual Run Capacitor**: The capacitor helps run both the fan and the compressor.

440 OVAL

DESCRIPTION	PART NUMBER
CAPACITOR 440V OVAL MFD 12.5	2427
CAPACITOR 440V OVAL MFD 2	2420
CAPACITOR 440V OVAL MFD 20	2430
CAPACITOR 440V OVAL MFD 30	2432
CAPACITOR 440V OVAL MFD 4	2422
CAPACITOR 440V OVAL MFD 6	2424
CAPACITOR 440V OVAL MFD 7.5	2425

370 ROUND

DESCRIPTION	PART NUMBER
CAPACITOR 370V ROUND MFD 15	PRC15
CAPACITOR 370V ROUND MFD 17.5	2441
CAPACITOR 370V ROUND MFD 20	PRC20
CAPACITOR 370V ROUND MFD 25	PRC25
CAPACITOR 370V ROUND MFD 30	PRC30

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com

www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

NOTE:

CAPACITORS IN SERIES

- MFD rating decreases; Voltage increase

$$\text{New MFD Rating} = \frac{MFD_1 \times MFD_2}{MFD_1 \text{ X } MFD_2}$$

CAPACITORS IN PARALLEL

- MFD increases; Voltage rating stays constant.

(Ex: two 5 MFD 370 V capacitors wired in parallel is the equivalent of a 10 MFD 370 V Capacitor)

New MFD Rating= MFD_1+ MFD_2

- When connected in either series or parallel it is recommended that capacitors with the same MFD ratings be used.
- Higher voltages may be substituted for lower voltages in the same MFD rating.

CONTACTORS

CW SERIES Miniature Contactors, recommended when both space savings and demanding industrial performance are a must. These can be used from Motor Controls, Solenoid Valves to Lighting and Heating Circuits.
CWM SERIES design to Industrial Duty and Reliability. Allow Total Panel Space Optimization, Engineered for Extended Mechanical and Electrical Life.

DESCRIPTION	PART NUMBER
CONTACTOR 3 POLE 7 AMPS	CW07L301
CONTACTOR 3 POLE 105 AMPS COIL 24 VOLTS.	CWM105L3001
CONTACTOR 3 POLE 105 AMPS COIL 120 VOLTS.	CWM105L300J
CONTACTOR 3 POLE 12 AMPS COIL 24 VOLTS.	CWM12L3101
CONTACTOR 3 POLE 12 AMPS COIL 120 VOLTS.	CWM12L310J
CONTACTOR 3 POLE 18 AMPS COIL 24 VOLTS.	CWM18L3101
CONTACTOR 3 POLE 18 AMPS COIL 120 VOLTS.	CWM18L310J
CONTACTOR 3 POLE 25 AMPS COIL 24 VOLTS.	CWM25L3001
CONTACTOR 3 POLE 25 AMPS COIL 120 VOLTS.	CWM25L300J
CONTACTOR 3 POLE 25 AMPS COIL 208 VOLTS.	CWM25L300L
CONTACTOR 3 POLE 32 AMPS COIL 24VOLTS.	CWM32L3001
CONTACTOR 3 POLE 32 AMPS COIL 120 VOLTS.	CWM32L300J
CONTACTOR 3 POLE 40 AMPS COIL 24 VOLTS.	CWM40L3001
CONTACTOR 3 POLE 40 AMPS COIL 120 VOLTS.	CWN40L300J
CONTACTOR 3 POLE 40 AMPS COIL 208 VOLTS.	CWM40L300L
CONTACTOR 3 POLE 50 AMPS COIL 120 VOLTS.	CWM50L300J
CONTACTOR 3 POLE 65 AMPS COIL 24 VOLTS.	CWM65L3001
CONTACTOR 3 POLE 65 AMPS COIL 120 VOLTS.	CWM65L300J
CONTACTOR 3 POLE 65 AMPS COIL 208 VOLTS.	CWM65L300L
CONTACTOR 3 POLE 80 AMPS	CWM80L300
CONTACTOR 3 POLE 80 AMPS COIL 120 VOLTS.	CWM80L300J
CONTACTOR 3 POLE 80 AMPS COIL 208 VOLTS.	CWM80L300L
CONTACTOR 3 POLE 95 AMPS COIL 24 VOLTS.	CWM95L3001
CONTACTOR 3POLE 95 AMPS COIL 120 VOLTS.	CWM95L300J
CONTACTOR 3 POLE 9 AMPS COIL 24 VOLTS.	CWM9L3101

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DRIVES/VFD

AQUAVAR

The AQUAVAR does more than just change motor speed. It truly manages your pump performance to match a wide range of system conditions and requirements. By combining the latest variable frequency drive technology and our patented pump control software.

DESCRIPTION	PART NUMBER
AQUAVAR 230 VOLTS 3PH 11.8 AMP	CPC20121
AQUAVAR 230 VOLTS 1PH 8.5 AMP	CPC20171
AQUAVAR 230 VOLTS 3PH 16.7 AMP	CPC20171
AQUAVAR 230 VOLTS 1PH 12 AMP	CPC20241
AQUAVAR 230 VOLTS 3PH 24.2 AMP	CPC20241
AQUAVAR 230 VOLTS 1PH 15.5 AMP	CPC20311
AQUAVAR 230 VOLTS 3PH 30.8 AMP	CPC20311
AQUAVAR 230 VOLTS 1PH 23 AMP	CPC20461
AQUAVAR 230 VOLTS 3PH 46.2 AMP	CPC20461
AQUAVAR 230 VOLTS 1PH 29.5 AMP	CPC20591
AQUAVAR 230 VOLTS 3PH 59.4 AMP	CPC20591
AQUAVAR 230 VOLTS 3PH 74.8 AMP	CPC20751
AQUAVAR 230 VOLTS 1PH 44.0 AMP	CPC20881
AQUAVAR 230 VOLTS 3PH 88.0 AMP	CPC20881
AQUAVAR 230 VOLTS 1PH 57.0 AMP	CPC21141
AQUAVAR 230 VOLTS 3PH 114.0 AMP	CPC21141
AQUAVAR 230 VOLTS 3PH 143.0 AMP	CPC21431
AQUAVAR 230 VOLTS 1PH 71.5 AMP	CPC21431
AQUAVAR 230 VOLTS 1PH 89.0 AMP	CPC21781
AQUAVAR 230 VOLTS 3PH 178.0 AMP	CPC21781
AQUAVAR 230 VOLTS 1PH 110.5 AMP	CPC22211

A Pre-engineered and fabricated line of packaged booster systems that provide maximum hydraulic capabilities of 1500 GPM and up to 340 PSI.

DESCRIPTION	PART NUMBER
AQUAVAR 230 VOLTS 3PH 221.0 AMP	CPC22211
AQUAVAR 230 VOLTS 1PH 124.0 AMP	CPC22481
AQUAVAR 230 VOLTS 3PH 248.0 AMP	CPC22481
AQUAVAR 460 VOLTS 3PH 6.9 AMP	CPC40061
AQUAVAR 460 VOLTS 3PH 8.8 AMP	CPC40081
AQUAVAR 460 VOLTS 3PH 11.9 AMP	CPC40121
AQUAVAR 460V 3PH 15.4 AMP	CPC40151
AQUAVAR 460 VOLTS 3PH 23 AMP	CPC40231
AQUAVAR 460V 3PH 31 AMP	CPC40311
AQUAVAR 460 VOLTS 3PH 38 AMP	CPC40381

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com

www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DRIVE AND CONTROLS

DESCRIPTION	PART NUMBER
AQUAVAR 460 VOLTS 3PH 44 AMP	CPC40441
AQUAVAR 460 VOLTS 3PH 59 AMP	CPC40591
AQUAVAR 460 VOLTS 3PH 72 AMP	CPC40721
AQUAVAR 460 VOLTS 3PH 77 AMP	CPC40771
AQUAVAR 460 VOLTS 3PH 96 AMP	CPC40961
AQUAVAR 460 VOLTS 3PH 124 AMP	CPC41241
AQUAVAR 460 VOLTS 3PH 157 AMP	CPC41571
AQUAVAR 460 VOLTS 3PH 180 AMP	CPC41801
AQUAVAR 460 VOLTS 3PH 245 AMP	CPC42451
AQUAVAR 460 VOLTS 3PH 316 AMP	CPC43161
AQUAVAR 460 VOLTS 3PH 368 AMP	CPC43681
AQUAVAR 460 VOLTS 3PH 414 AMP	CPC44141
AQUAVAR 460 VOLTS 3PH 486 AMP	CPC44861
AQUAVAR 460 VOLTS 3PH 526 AMP	CPC45261
AQUAVAR 460 VOLTS 3PH 602 AMP	CPC46021

DESCRIPTION	PART NUMBER
AQUAVAR 460 VOLTS 3PH 645 AMP	CPC46451
AQUAVAR 575V 3PH 2.7 AMP	CPC50031
AQUAVAR 575V 3PH 3.9 AMP	CPC50041
AQUAVAR 575V 3PH 6.1 AMP	CPC50061
AQUAVAR 575V 3PH 9 AMP	CPC50091
AQUAVAR 575V 3PH 11 AMP	CPC50111
AQUAVAR 575V 3PH 17 AMP	CPC50171
AQUAVAR 575V 3PH 22 AMP	CPC50221
AQUAVAR 575V 3PH 27 AMP	CPC50271
AQUAVAR 575V 3PH 32 AMP	CPC50321
AQUAVAR 575V 3PH 41 AMP	CPC50411
AQUAVAR 575V 3PH 52 AMP	CPC50521
AQUAVAR 575V 3PH 62 AMP	CPC50621
AQUAVAR 575V 3PH 77 AMP	CPC50771
AQUAVAR 575V 3PH 99 AMP	CPC50991
AQUAVAR 575V 3PH 125 AMP	CPC51251
AQUAVAR 575V 3PH 144 AMP	CPC51441

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DRIVE AND CONTROLS

WEG-CFW

A NEMA1 enclosure allow for a large variety of applications. Sensor less vector control NEMA 1 enclosure single and three-phase input voltage 200-240 VOLTS or 380-480 VOLTS input voltage 150% current overload capacity 15 KHZ adjustable switching frequency four ISO

DESCRIPTION	PART NUMBER
WEG VFD 1/3HP 460 VOLTS 3PH 1.0 NA*	CFW080010T3848E
WEG VFD 1/3HP 230 VOLTS 1-3PH 1.6 NA	CFW080016B2024E
WEG VFD 3/4HP 460 VOLTS 3PH 1.6 NA	CFW080016T3848E
WEG VFD 1/2HP 230 VOLTS 1-3PH 2.6 NA	CFW080026B2024E
WEG VFD 1HP 460 VOLTS 3PH 2.6 NA	CFW080026T3848E
WEG VFD 1HP 460 VOLTS 3PH 2.7 NA	CFW080027T3848
WEG VFD 1HP 230 VOLTS 3PH 4 NA	CFW080040B2024E
WEG VFD 2HP 460 VOLTS 3PH 4 NA	CFW080040T3848E
WEG VFD 2HP 460 VOLTS 3PH 4.3 NA	CFW080043T3848E
WEG VFD 3HP 460 VOLTS 3PH 6.5 NA	CFW080065T3848E
WEG VFD 2HP 230 VOLTS 3PH 7 NA	CFW080070T2024E
WEG VFD 2HP 230 VOLTS 3PH 7.3 NA	CFW080073B2024E
WEG VFD 3HP 230 VOLTS 3PH 10 NA	CFW080100B2024E
WEG VFD 5HP 460 VOLTS 3PH 10 NA	CFW080100T3848E
WEG VFD 7.5HP 460 VOLTS 3PH 13 NA	CFW080130T3848E
WEG VFD 5HP 230 VOLTS 3PH 16 NA	CFW080160T2024E
WEG VFD 10HP 460 VOLTS 3PH 16 NA	CFW080160T3848E

*** NA: Nominal Amps.**

DESCRIPTION	PART NUMBER
WEG VFD 1.5 CT* 1.5 VT* HP 460 VOLTS	CFW090003TGZ
WEG VFD 2.0 CT 2.0 VT HP 460 VOLTS	CFW090004TGZ
WEG VFD 1.5 CT 1.5 VT HP 230 VOLTS	CFW090006TDZ
WEG VFD 2.0 CT 2.0 VT HP 230 VOLTS	CFW090007TDZ
WEG VFD 5.0 CT 5.0 VT HP 460 VOLTS	CFW090009TGZ
WEG VFD 3.0 CT 3.0 VT HP 230 VOLTS	CFW090010TDZ
WEG VFD 3.0 CT 3.0 VT HP 230 VOLTS	CFW090013TDZ
WEG VFD 7.5 CT 7.5 VT HP 460 VOLTS	CFW090013TGZ
WEG VFD 5.0 CT 5.0 VT HP 230 VOLTS	CFW090016TDZ
WEG VFD 10 CT 10 VT HP 460 VOLTS	CFW090016TGZ
WEG VFD 7.5 HP 230 VOLTS 24 NA	CFW090024TDZ
WEG VFD 15 HP 460 VOLTS 24 NA	CFW090024TGZ
WEG VFD 10 HP 230 VOLTS 28 NA	CFW090028TDZ
WEG VFD 20 CT 25 VT HP 460 VOLTS	CFW090030TGZ
WEG VFD 25 CT 30 VT HP 460 VOLTS	CFW090038TGZ
WEG VFD 15 HP 230 VOLTS 45 NA	CFW090045TDZ
WEG VFD 30 CT 40 VT HP 460 VOLTS	CFW090045TGZ
WEG VFD 30 CT 40 VT HP 460 VOLTS	CFW090045TGDBZ

*** CT= Constant Torque; VT=Variable Torque.**

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DRIVE AND CONTROLS

DESCRIPTION	PART NUMBER
WEG VFD 20 CT 25 VT HP 230 VOLTS	CFW090054TDZ
WEG VFD 20 CT 25 VT HP 230 VOLTS	CFW090054TDDBZ
WEG VFD 40 CT 50 VT HP 460 VOLTS	CFW090060TGZ
WEG VFD 40 CT 50 VT HP 460 VOLTS	CFW090060TGDBZ
WEG VFD 25 CT 30 VT HP 230 VOLTS	CFW090070TDZ
WEG VFD 50 CT 60 VT HP 460 VOLTS	CFW090070TGZ
WEG VFD 25 CT 30 VT HP 230 VOLTS	CFW090070TDDBZ
WEG VFD 50 CT 60 VT HP 460 VOLTS	CFW090070TGDBZ
WEG VFD 30 CT 40 VT HP 230 VOLTS	CFW090086TDZ
WEG VFD 60 CT 75 VT HP 460 VOLTS	CFW090086TGZ
WEG VFD 30 CT 40 VT HP 230 VOLTS	CFW090086TDDBZ
WEG VFD 60 CT 75 VT HP 460 VOLTS	CFW090086TGDBZ
WEG VFD 40 CT 50 VT HP 230 VOLTS	CFW090105TDZ
WEG VFD 75 CT 100 VT HP 460 VOLTS	CFW090105TGZ
WEG VFD 40 CT 50 VT HP 230 VOLTS	CFW090105TDDBZ
WEG VFD 75 CT 100 VT HP 460 VOLTS	CFW090105TGDBZ
WEG VFD 50 CT 50 VT HP 230 VOLTS	CFW090130TDZ
WEG VFD 50 CT 50 VT HP 230 VOLTS	CFW090130TDDBZ
WEG VFD 100 CT 125 VT HP 460 VOLTS	CFW090142TGZ
WEG VFD 100 CT 125 VT HP 460 VOLTS	CFW090142TGDBZ
WEG VFD 150 CT 150 VT HP 460 VOLTS	CFW090180TGZ
WEG VFD 200 CT 200 VT HP 460 VOLTS	CFW090240TGZ
WEG VFD 300 CT 300 VT HP 460 VOLTS	CFW090361TGZ
WEG VFD 350 CT 350 VT HP 460 VOLTS	CFW090450TGZ
WEG VFD 500 CT 500 VT HP 460 VOLTS	CFW090600TGZ

YASKAWA iQpump Controller

YASKAWA
The Drive for Quality™

IQpump Controller was designed with the pump service operators and pump system owners in mind. iQpump offers ease of setup and comprehensive pump and motor protection features, allow the operator to setup specific control values for a wide range of applications.
IQpump can be used to replace existing mechanical pump systems using Throttling Valves, Bypass Valves or others means of control to improve regulation and save energy.

230 Volts

DESCRIPTION	PART NUMBER
IQpump 5 HP NEMA1 VFD 3 PH 240V	23P71-107
IQpump 7.5 HP NEMA1 VFD 3 PH 240V	25P51-107
IQpump 10 HP NEMA1 VFD 3 PH 240V	27P51-107

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
IQpump 15 HP NEMA1 VFD 3 PH 240V	20111-107
IQpump 20 HP NEMA1 VFD 3 PH 240V	20151-107
IQpump 25 HP NEMA1 VFD 3 PH 240V	20181-107
IQpump 30 HP NEMA1 VFD 3 PH 240V	20221-107
IQpump 5 HP NEMA1 VFD 3 PH 480V	43P71-107
IQpump 7.5 HP NEMA1 VFD 3 PH 480V	45P51-107
IQpump 10 HP NEMA1 VFD 3 PH 480V	47P51-107
IQpump 15 HP NEMA1 VFD 3 PH 480V	49P01-107
IQpump 20 HP NEMA1 VFD 3 PH 480V	40111-107
IQpump 25 HP NEMA1 VFD 3 PH 480V	40151-107
IQpump 30 HP NEMA1 VFD 3 PH 480V	40181-107

480 Volts

DESCRIPTION	PART NUMBER
IQpump 5 HP NEMA1 VFD 3 PH 480V	43P71-107
IQpump 7.5 HP NEMA1 VFD 3 PH 480V	45P51-107
IQpump 10 HP NEMA1 VFD 3 PH 480V	47P51-107
IQpump 15 HP NEMA1 VFD 3 PH 480V	49P01-107
IQpump 20 HP NEMA1 VFD 3 PH 480V	40111-107
IQpump 25 HP NEMA1 VFD 3 PH 480V	40151-107
IQpump 30 HP NEMA1 VFD 3 PH 480V	40181-107

MAGNETIC STARTER

WEG mounted their reliable CWM contactor and RW bimetallic overload into a NEMA 1 enclosure to provide the ESW, a non-reversing full voltage starter suited for just about any application. It is stocked with and without start/stop pushbuttons and comes standard with one normally open auxiliary contact. You can expect all the features and benefits of the CWM and RW components in WEG's off-the-shelf ESW enclosed starter.

DESCRIPTION	PART NUMBER
STARTER WEG 3 PH 5 HP 230 VOLTS	ESW18**A**E-R24*
STARTER WEG N1 3 PH 5 HP 230 VOLTS	ESW18**B**E-R23*
STARTER WEG 1 PH 7.5 HP 230 VOLTS	ESW25**A**E-R25*
STARTER WEG 3 PH 7.5 HP230 VOLTS	ESW25**B**E-R24*
STARTER WEG N1 1 PH 2 HP 110 VOLTS	ESW32**A**E-R25*
STARTER WEG N1 1 PH 10 HP 230 VOLTS	ESW32**B**E-R26*
STARTER WEG N1 1 PH 3 HP 110 VOLTS	ESW50**A**E-R28*
STARTER WEG N1 3 PH 15 HP 230 VOLTS	ESW50**B**E-R28*
STARTER WEG N1 3 PH 15 HP 230 VOLTS	ESW65**B**E-R27*
STARTER WEG N1 3 PH 20 HP 230 VOLTS	ESW65**B**E-R29*
STARTER WEG N1 3 PH 20 HP 230 VOLTS	ESW80**B**E-R30*

***nema 1 enclosure- no pilot devices**
A=120 volts coil**; B=**230 volts coil

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

OVERLOADS

Phase failure / unbalance sensitivity. Ambient temperature compensation. Isolated N.C. "Trip" and N.O. "Alarm" auxiliary contacts. Class 10 tripping characteristics. "Trip Free" design. Field adjustable trip current setting. Test/Reset button. Selectable Manual or Automatic Reset. Separate mounting capability via screws or DIN rail. Protection against long starting times

DESCRIPTION	MOUNTING ON CONTACTOR	MAX. FUSE AMPS	PART NUMBER
OVERLOAD RELAYS 90-112 AMP	CWM95…105	250	RW1171D112
OVERLOAD RELAYS 63-80 AMP	CWM95…105	200	RW1171D80
OVERLOAD RELAYS 75-97 AMP	CWM95…105	225	RW1171D97
OVERLOAD RELAYS 7-10 AMP	CWM9…40	40	RW27D10
OVERLOAD RELAYS 8-12.5	CWM9…40	50	RW27D12.5
OVERLOAD RELAYS 10-15 AMP	CWM9…40	60	RW27D15
OVERLOAD RELAYS 11-17 AMP	CWM9…40	60	RW27D17
OVERLOAD RELAYS 1.8 -2.8 AMP	CWM9…40	15	RW27D-2.8
OVERLOAD RELAYS 2.8 -4.0 AMP	CWM9…40	15	RW27D-4.0
OVERLOAD RELAYS 4-6.3 AMP	CWM9…40	25	RW27D-6.3
OVERLOAD RELAYS 5.6-8 AMP	CWM9…40	30	RW27D-8.0
OVERLOAD RELAYS 32-50 AMP	CWM50…80	125	RW672D50
OVERLOAD RELAYS 40-57 AMP	CWM50…80	150	RW672D57
OVERLOAD RELAYS 50-63 AMP	CWM50…80	150	RW672D63
OVERLOAD RELAYS 57-70 AMP	CWM50…80	175	RW672D70
OVERLOAD RELAYS 15-23 AMP	CWM9…40	90	RW27D-23
OVERLOAD RELAYS 22-32 AMP	CWM9…40	90	RW27D-32
OVERLOAD RELAYS 25/40 AMP	CWM32…40	90	RW67.1D-40

PHASE MONITOR

Phase Monitor Relays (sometimes called **3 Phase Monitors**, Three Phase Monitor Relays, **Phase Loss Relays**, **Protective Relays**, **Motor Protection Relays** or **Phase Failure Relays)** provide **motor protection** against premature equipment failure caused by voltage faults on 3 Phase systems. These devices are designed to be compatible with most WYE or Delta systems. In WYE systems, a connection to a neutral is not required. Phase Monitor Relays protect against unbalanced voltages or single phasing regardless of any regenerative voltages.

DESCRIPTION	PART NUMBER
PHASE MONITORS PLUG 230 8 PIN PLUG IN, 190-270 VAC	PM-230-118-A
PHASE MONITOR 440 VAC 8 PIN PLUG IN, 430-480 VAC	PM-440-118

Operate at 2.0 seconds
Release at 5 seconds
Temperature: -20 to +70°C

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

RELAYS

15 pin and 11 pin relays ranging from 110-220 v and 24v-220 VOLTS coil base for 8 and 11 pin relays

DESCRIPTION	PART NUMBER
RELAY 8 PINS 105868 120 VOLTS	105868
RELAY 11 PINS 105912 120 VOLTS	105912
RELAY 11 PINS 105916 230 VOLTS	105916
SOCKETS FOR 11 PIN RELAYS	115904
SOCKETS, RELAY, 14 PINS	2A584
RELAY 8 PIN COIL 24VAC	47300
RELAY 8 PIN 24 VDC 60-12	47400
RELAY 8 PIN COIL 110 VSAC	47700
RELAY 8 PIN COIL 220 VSAC	48000
RELAY SOCKET 8 PIN F/omega rail PF083A-E	51210
RELAY, 14 PINS	5ZC07
RELAY ASSEMBLY 24 VOLT	143T137
RELAY ASSEMBLY 220 VOLT	143T139A

SOFT START

Full microprocessor based control allows easy adjustment through the keypad during start-up, and complete motor protection.

SSW03 SERIES

SSW3 SERIES are built to match the ruggedness and reliability of WEG motors, providing a complete and cost effective solution. Full microprocessor based control allows easy adjustment through the keypad during start-up, and complete motor protection. A specific pump control feature prevents running pumps at no load and eliminates pipeline waterhammer.
APLICATION: PUMPS, FANS, SAWS, BLOWERS, COMPRESSORS CONVEYORS, CRUSHERS, MIXERS.

230 Volts

DESCRIPTION	PART NUMBER
WEG 50HP 230 VOLTS SOFT STARTER 120 NA* 144 AMPS	SSW031203D1
WEG 75HP 230 VOLTS SOFT STARTER 170 NA 204 AMPS	SSW031703D1
WEG 75HP 230 VOLTS SOFT STARTER 205 NA 246 AMPS	SSW032053D1
WEG 100HP 230 VOLTS SOFT STARTER 255 NA 306 AMPS	SSW032553D1
WEG 100HP 230 VOLTS SOFT STARTER 290 NA 348 AMPS	SSW032903D1
WEG 125HP 230 VOLTS SOFT STARTER 340 NA 408 AMPS	SSW033403D1
WEG 150HP 230 VOLTS SOFT STARTER 410 NA 492 AMPS	SSW034103D1
WEG 200HP 230 VOLTS SOFT STARTER 475 NA 570 AMPS	SSW034753D1
WEG 250HP 230 VOLTS SOFT STARTER 580 NA 696 AMPS	SSW035803D1
WEG 250HP 230 VOLTS SOFT STARTER 670 NA 804 AMPS	SSW036703D1
WEG 300HP 230 VOLTS SOFT STARTER 800 NA 960 AMPS	SSW038003D1
WEG 400HP 230 VOLTS SOFT STARTER 950 NA 1140 AMPS	SSW039503D1

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

460 Volts

DESCRIPTION	PART NUMBER
WEG 100HP 460 VOLTS SOFT STARTER 120 NA* 144 AMPS	SSW031203G1
WEG 150HP 460 VOLTS SOFT STARTER 170 NA 204 AMPS	SSW031703G1
WEG 150HP 460 VOLTS SOFT STARTER 205 NA 246 AMPS	SSW032053G1
WEG 200HP 460 VOLTS SOFT STARTER 255 NA 306 AMPS	SSW032553G1
WEG 250HP 460 VOLTS SOFT STARTER 290 NA 348 AMPS	SSW032903G1
WEG 300HP 460 VOLTS SOFT STARTER 340 NA 408 AMPS	SSW033403G1
WEG 350HP 460 VOLTS SOFT STARTER 410 NA 492 AMPS	SSW034103G1
WEG 400HP 460 VOLTS SOFT STARTER 475 NA 570 AMPS	SSW034753G1
WEG 500HP 460 VOLTS SOFT STARTER 580 NA 696 AMPS	SSW035803G1
WEG 600HP 460 VOLTS SOFT STARTER 670 NA 804 AMPS	SSW036703G1
WEG 700HP 460 VOLTS SOFT STARTER 800 NA 960 AMPS	SSW038003G1
WEG 800HP 460 VOLTS SOFT STARTER 950 NA 1140 AMPS	SSW039503G1

*** NA: Nominal Amps.**

575 Volts

DESCRIPTION	PART NUMBER
WEG 125HP 575V SOFT STARTER 120 NA* 144 AMPS	SSW031203G1
WEG 150HP 575V SOFT STARTER 170 NA 204 AMPS	SSW031703G1
WEG 200HP 575V SOFT STARTER 205 NA 246 AMPS	SSW032053G1
WEG 250HP 575V SOFT STARTER 255 NA 306 AMPS	SSW03553G1
WEG 300HP 575V SOFT STARTER 290 NA 348 AMPS	SSW032903G1
WEG 350HP 575V SOFT STARTER 340 NA 408 AMPS	SSW033403G1
WEG 400HP 575V SOFT STARTER 410 NA 492 AMPS	SSW034103G1
WEG 500HP 575V SOFT STARTER 475 NA 570 AMPS	SSW034753G1
WEG 600HP 575V SOFT STARTER 580 NA 696 AMPS	SSW035803G1
WEG 700HP 575V SOFT STARTER 670 NA 804 AMPS	SSW036703G1
WEG 900HP 575V SOFT STARTER 800 NA 960 AMPS	SSW038003G1
WEG 1000HP 575V SOFT STARER 950 NA 1140 AMPS	SSW39503G1

SSW04 SERIES

APLICATION: PUMPS, FANS, BLOWERS, AND COMPRESSORS CONVEYORS.

230 VOLTS

DESCRIPTION	PART NUMBER
WEG 5HP 230 VOLTS SOFT STARTER 16 NA* 17.6 AMPS	SSW040163D1
WEG 10HP 230 VOLTS SOFT STARTER 30 NA 33 AMPS	SSW040303D1
WEG 15HP 230 VOLTS SOFT STARTER 45 NA 49.5 AMPS	SSW040453D1
WEG 25HP 230 VOLTS SOFT STARTER 60 NA 68 AMPS	SSW040603D1
WEG 30HP 230 VOLTS SOFT STARTER 85 NA 96 AMPS	SSW040853D1

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

460 Volts

DESCRIPTION	PART NUMBER
WEG 10HP 460 VOLTS SOFT STARTER 16 NA* 17.6 AMPS	SSW040163G1
WEG 20HP 460 VOLTS SOFT STARTER 30 NA 33 AMPS	SSW040303G1
WEG 30HP 460 VOLTS SOFT STARTER 45 NA 49.5 AMPS	SSW040453G1
WEG 50HP 460 VOLTS SOFT STARTER 60 NA 68 AMPS	SSW040603G1
WEG 75HP 460 VOLTS SOFT STARTER 85 NA 96 AMPS	SSW040853G1

575 Volts

DESCRIPTION	PART NUMBER
WEG 15HP 575V SOFT STARTER 16 NA 17.6 AMPS	SSW040163G1
WEG 30HP 575V SOFT STARTER 30 NA 33 AMPS	SSW040303G1
WEG 40HP 575V SOFT STARTER 45 NA 49.5 AMPS	SSW040453G1
WEG 60HP 575V SOFT STARTER 60 NA 68 AMPS	SSW040603G1
WEG 75HP 575V SOFT STARTER 85 NA 96 AMPS	SSW040853G1

*** NA: Nominal Amps.**

SSW05 SERIES

SSW05 SERIES is a super compact fully soft starter with a state-of-the-art DSP controller. Its digital construction provides optimum operation, diagnostics capability and full motor protection. Simplicity in set-up and operation is assured since all parameters and set-up selections are made via dipswitches and potentiometers. Status LED'S alert the user of the operational status of the SSW-05. Simplicity, ease of set-up and micro size assures quick and easy installation and operation.
APLICATION: PUMPS, FANS, BLOWERS, AND COMPRESSORS

230 VOLTS

DESCRIPTION	PART NUMBER
WEG 3HP 230 VOLTS SOFT STARTER 10 NA*	SSW050010T
WEG 5HP 230 VOLTS SOFT STARTER 16 NA	SSW050016T
WEG 7.5HP 230 VOLTS SOFT STARTER 23 NA	SSW050023T
WEG 10HP 230 VOLTS SOFT STARTER 30 NA	SSW050030T
WEG 15HP 230 VOLTS SOFT STARTER 45 NA	SSW050045T
WEG 20HP 230 VOLTS SOFT STARTER 60 NA	SSW050060T
WEG 30HP 230 VOLTS SOFT STARTER 85 NA	SSW050085T

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

460 Volts

DESCRIPTION	PART NUMBER
WEG 5HP 460 VOLTS SOFT STARTER 10 NA*	SSW050010T
WEG 10HP 460 VOLTS SOFT STARTER 16 NA	SSW050016T
WEG 15HP 460 VOLTS SOFT STARTER 23 NA	SSW050023T
WEG 20HP 460 VOLTS SOFT STARTER 30 NA	SSW050030T
WEG 30HP 460 VOLTS SOFT STARTER 45 NA	SSW050045T
WEG 40HP 460 VOLTS SOFT STARTER 60 NA	SSW050060T
WEG 60HP 460 VOLTS SOFT STARTER 85 NA	SSW050085T

*** NA: Nominal Amps.**

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

BLANK PAGE

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com

www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

IRRIGATION

ACCESSORIES

FLOATING DUCK

We have a variety of large gooses and small ducks. Used to hold up irrigation suction pipe in the lake from sucking sand and small particles

DESCRIPTION	PART NUMBER
CANAL FLOAT LG DUCK GOOSE, Size: 28-1/2 INCH STANDARD (72.39 cm)	5840MW
CANAL FLOAT SM MALLARD, Size: 18-1/2 INCH MAGNUM (46.99 cm)	5700MA
CANAL FLOAT LG SNOW GOOSE, Size: 28-1/2 INCH STANDARD (72.39 cm)	5850MW

IRRIGATION WIRE

DESCRIPTION	PART NUMBER
IRRIGAT WIRE 12X2500 BLK	12X2500BLACK
IRRIGAT WIRE 120X2500 RED	12X2500RED
IRRIGAT WIRE 14X2500 BLK	150060
IRRIGAT WIRE 14X2500 BLUE	14X2500BLUE
IRRIGAT WIRE 14X2500 RED	150040
IRRIGAT WIRE 14X2500 WHIT	150050
IRRIGAT WIRE 14X2500 YELL	150090
IRRIGAT WIRE 16X2500 BLCK	160160
IRRIGAT WIRE 16X2500 BLUE	16X2500BL
IRRIGAT WIRE 16X2500 RED	160140
IRRIGAT WIRE 16X2500 WHIT	16X2500W
IRRIGAT WIRE 16X2500 YELL	16X2500
IRRIGATION WIRE 18X12 250	180090

DESCRIPTION	PART NUMBER
IRRIGATION WIRE 18X12 500	18/12X500R
IRRIGATION WIRE 18X6 250	180040
IRRIGATION WIRE 18X6 500	18/6X5R
IRRIGATION WIRE 18X13 250	18X13X250
IRRIGATION WIRE 18X13 500	180091
IRRIGATION WIRE 18X2 250	180010
IRRIGATION WIRE 18X2 500	18X2 500
IRRIGATION WIRE 18X4 250	180020
IRRIGATION WIRE 18X4 500	18X5R
IRRIGATION WIRE 18X8 250	18X8X250
IRRIGATION WIRE 18X8 500	18X8X500
IRRIGATION WIRE 18X9 250	18X9X250
IRRIGATION WIRE 18X9 500	18X9

WIRE CONNECTORS

DESCRIPTION	PART NUMBER
WIRE NUTS BLUE BOX LARGE, Accept 3 #12 -- 2 #6 w/1 #12 AWG, Up to 600 Volt	30-454
WIRE NUTS BLUE SMALL SIZE, Accept 2 #22 --3 #16 AWG up to 600 Volt	IDE 30-072
WIRE NUTS LOW VOLT SMALL, 2 #24 – 5 #18 AWG 30 VOLTS, pre filled silicone	LV9000
WIRE NUTS ORANGE 600V	12014
WIRE NUTS RED BOX, Accepts 2 #14 to 5 #12 AWG Up to 600 Volt	30-452
WIRE NUTS YELLOW BOX, Accept 2 #18 to 3#12, Up to 600 Volt	733KP/18-8

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

MARKING FLAG

DESCRIPTION	PART NUMBER
MARKING FLAGS ORANGE, 4"H x 4"W; Wire Length: 21"; 100/Bundle	
MARKING FLAGS RED; 4"H x 4"W; Wire Length: 21"; 100/Bundle	
MARKING FLAGS YELLOW; 4"H x 4"W; Wire Length: 21"; 100/Bundle	214501-4
PAINT MARK FLOURESCENT 16 Oz Orange	NB-16-657

PVC CEMENT

Purple Primer is an all-purpose primer designed to remove gloss, soften and penetrate bonding surfaces of PVC and CPVC pipe and fittings. It is highly recommended for use on high gloss, hard finish bell end pipe or fittings. Use at all temperatures.

DESCRIPTION	PART NUMBER
PURPLE PRIMER CLEANER QT.	019080-12
PURPLE PRIMER GAL HARVEY	019090-4

Pipe Cleaner is an all-purpose pipe cleaner designed to thoroughly clean pipe. Can be used on ABS, CPVC & PVC pipe and fittings. Use at all temperatures. Flows freely and evaporates quickly.

DESCRIPTION	PART NUMBER
PVC CLEAR CLEANER 1/4PT	019100-24
PVC CLEAR CLEANER 1/2PT	019110-24
PVC CLEAR CLEANER PT	019120-12
PVC CLEAR CLEANER QT	019130-12
PVC CLEAR CLEANER GAL	019140-6

P-12G Heavy Bodied Gray PVC Cement is a heavy bodied PVC solvent cement designed for use on PVC pressure pipe and fittings: Schedule 40 & 80, Types I & II, up to 12". Flows freely and provides a thick layer of cement on the pipe. Helps to fill gaps in larger diameter pipe and loose fitting joints.

DESCRIPTION	PART NUMBER
PVC CEMENT P-12G QT GREY	018280-12
PVC CEMENT P-12G GAL GREY	018290-6

P-4 Regular Bodied Clear PVC Cement is a regular bodied, fast set PVC solvent cement designed for use on PVC pressure pipe and fittings: Schedule 40 through 4" & Schedule 80 up to 2", Types I & II. Flows freely. Sets up quickly.

DESCRIPTION	PART NUMBER
PVC CEMENT P4 4 OZ PT HARVEY	018100-24
PVC CEMENT P4 8 0Z PT HARVEY	018110-24
PVC CEMENT P4 160Z HARVEY	018120-12
PVC CEMENT P4 QT/32OZ HARVEY	018130-12
PVC CEMENT P4 1GAL HARVEY	018140-6

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

Teflon Tape

DESCRIPTION	PART NUMBER
TEFLON TAPE 1/2X520 HARVEY	26135
TEFLON TAPE 3/4X520 HARVEY	34520-C

PVC Cement wet is a medium-bodied, extremely fast setting PVC cement for all classes and schedules through 6 in. diameter, Schedule 80 through 4 in. diameter. Especially formulated for applications where conditions are very wet or when quick pressurization is needed.

DESCRIPTION	PART NUMBER
PVC CEMENT WET SET 1/4 PT	018400-24
PVC CEMENT WET SET 1/2 PT	18410-24
PVC CEMENT WET SET PT	018420-12
PVC CEMENT WET SET QT	018430-12
PVC CEMENT WET SET 1 GAL	018440-6

TFE paste is a pure white thread lubricant and sealant made with Teflon Brushable paste dries slowly, non-hardening, withstands up to 3000 PSI on gases at temperatures from -50 degrees Fahrenheit to +500degrees Fahrenheit, Use on water, steam, natural and LP gas, oils, fuels, dilute acids Use on water, steam, natural and LP gas, oils, fuels, dilute acids Apply to metals, PVC, CPVC, ABS, polypropylene and nylon

DESCRIPTION	PART NUMBER
TFE PASTE 1FL OZ TUBE	023015-12
TFE PASTE 4 OZ W/TEFLON	023030
TFE PASTE 16 OZ W/TEFLON	023060

CUTTERS

DESCRIPTION	PART NUMBER
POLY PIPE CUTTER 1/2 TO 1	PTC1
PVC PIPE CUTTER 1 1/4	8242
PVC PIPE CUTTER 2	26190
PVC CABLE CUTTER 24"	8205
PVC CABLE CUTTER 36"	8206
MACHETE 22" M22	M22
PICK HICKORY HANDLE 36"	69-636
PICK MATTOCK HEAD 5 LB WITHOUT HANDLE	64-150
PICK MATTOCK HEAD 5 LB WITH HANDLE	64-151

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

HACKSAW

DESCRIPTION	PART NUMBER
HACKSAW LENOX BLD 218HE	V218HE
HACKSAW LENOX BLD 224HE	V224HE
HACKSAW LENOX 4012	4012
HACKSAW ECONOMY 55 31/2"	55
HANDSAW 12" HSF-120	HSF-120
HANDSAW 18" HSF-180	HSF-180

SHOVELS

DESCRIPTION	PART NUMBER
SHOVEL TRENCHING 3" BLUE	CH3TS-F
SHOVEL TRENCHING 4" ORANGE	CH4TS-F
SHOVEL TRENCHING 5" RED	CH5TS-F
SHOVEL TRENCHING 6" GREEN	CH6TS-F

WRENCH

DESCRIPTION	PART NUMBER
PIPE WRENCH ALUMINUM. 18"	APW18
PIPE WRENCH ALUMINUM. 24"	APW24
PIPE WRENCH ALUMINUM. 36"	APW36

VALVE BOX

DESCRIPTION	PART NUMBER
IRRIG VALV/BOX 6” ROUND BOX & LID COVER.	107BC
IRRIG VALV/BOXES 10” ROUND BOX & LID/COVER.	100
IRRIG VALV/BOXES 12” RECT. BOX & LID/COVER **12x17x12**	120
IRRIG VALV/BOXES 20” RECT. BOX & LID/COVER **15x20x12**	150

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

CONTROL TIMERS

Mechanical and digital timers are available. Designed for residential and commercial irrigation systems

POOL TIMERS

Just three Precision compatible brackets allow direct replacement in all NEMA I and NEMA III. Enclosures of all popular models. Carry them in your truck and you can handle any replacement job. There are no exposed gears that can cause premature motor failure.

DESCRIPTION	PART NUMBER
T101P 125V 24 HRS PVC BOX TIMER INTERMATIC	T101P
T104P 208/277V 24 HRS PVC BOX TIMER INTERMATIC	T104P

PUMP STARTER (PUMP RELAY)

The Pump Start Relay enclosure is constructed with a corrosion resistant, UV resistant and shockproof material. The rain-tight, secure, rustproof enclosure provides a safe and secure connection in a housing built to last.
110 VAC or 24 VAC Coils Available – Provides for a variety of applications up to 7.5 h.p.

DESCRIPTION	PART NUMBER
K-RAIN PUMP START RELAY, 110 VAC, 60 HZ; INPUT: 120 or 240 VAC up to 3 HP	1521
K-RAIN PUMP START RELAY; 24 VAC, 60 HZ; INPUT: 120 or 240 VAC up to 3 HP	1522
K-RAIN PUMP START RELAY, 110 VAC, 60 HZ; INPUT: 120 VAC up to 3 HP, 240 VAC up to 5 HP.	1551
K-RAIN PUMP START RELAY; 24 VAC, 60 HZ; INPUT: 120 VAC up to 3 HP, 240 VAC up to 5 HP.	1552
K-RAIN PUMP START RELAY; 24 VAC, 60 HZ; INPUT: 120 VAC up to 3 HP.	1553

RAIN SENSOR

Unit ready for bracket mount or 1/2" conduit/pipe thread mount at bottom. Adjusts easily from 1/8" to 1" rainfall. Compatible with most controller brands (Ready for normally-closed or normally-open hookup). Supplied with 25 feet of hookup wire. Saves unneeded watering. Designed to be used with low voltage irrigation systems only

NELSON

DESCRIPTION	PART NUMBER
NELSON RAIN TRIP 24 VOLTS; HEIGHT: 3.25", WIDTH: 5.75"	8501

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

IRRIGATION TIMERS

These irrigation timers permit 1 to 60 "ON" operations every 24 hours. This series is designed for water metering in increments of 12 minutes to 20 hours - 45 minutes for maximum conservation of precious water resources. The 14-day skipper feature permits irrigation to be omitted on selected day(s) and also provides for "every other" day operation. The "ON/OFF/AUTOMATIC" switch allows shutdown during rainy days or extended watering during dry periods without disturbing the automatic cycle set on dial.

DESCRIPTION	PART NUMBER
TIMER INTERMATIC CYCLE 250V	R8806P101C
TIMER INTERMATIC 125V FOR RAIN SENSOR	R8815P101C
TIMER INTERMATIC 250V FOR RAIN SENSOR	R8816P101C
TIMER INTERMATIC 125 VOLTS	T8805P101C
TIMER INTERMATIC 125/24V	T8845PV

Irritrol Controllers have been the contractor's choice for reliability and ease-of-use for years. Leading the industry with over 40 models from which to choose and new control products continually being introduced, such as the revolutionary all-new PC Control, which works with the homeowner's personal computer, Irritrol provides an edge over the competition.

Maximum output per station: 24 VAC, .5 amps
Maximum output to valves: 24 VAC, 1.25 amps (including master valve)
Battery backup: 9-volt alkaline battery (not included)
Transformer input: 120 VAC, 60 Hz
Transformer output: 24 VAC, 1.67 amps

DESCRIPTION	PART NUMBER
TOTAL CONTROL TIMER 6 STATIONS	TC-6EX-B
TOTAL CONTROL TIMER 9 STATIONS	TC-9EX-B
TOTAL CONTROL TIMER 12 STATIONS	TC-12EX-B
TOTAL CONTROL TIMER 18 STATIONS	TC-18EX-B
TOTAL CONTROL TIMER 24 STATIONS	TC-24EX-B
RAIN DIAL PLUS CONTROLLER	RD6PLUSEXT
RAIN DIAL PLUS CONTROLLER	RD9PLUSEXT
RAIN DIAL PLUS CONTROLLER	RD12PLUS-EXT

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

2100 models offer less hassle – 24 hour programmable time dial with multiple start times and wide variety of timing periods including a "Skip-a-Day" 14 day program.
U.L. Approved

2200 Models perfect for nursery and other mist applications – 10 minutes programmable dial, wide variety of timing periods in multiple of 1.5,3 and 6 seconds and multiple start times.

2500 models prewired for easy connection of a rainswitch – Allows for manual override of rainswitch from controller face.

Convenience – 2520 allows operation of 24-volt rainswitch and 2 H.P. 220 volt pump with same controller.

DESCRIPTION	PART NUMBER
110 VOLT K-RAIN CONT 1 STATION WITH LOCK	2112
110/24 VOLT K-RAIN CONT 1 STATION WITH LOCK	2114
220 VOLT K-RAIN CONT 1 STATION WITH LOCK	2120
120 VOLT K-R SWITCH READY CONTROL	2510
120/24 VOLT K-R SWITCH READY CONTROL	2514
220 VOLT K-R SWITCH READY CONTROL	2520

Easy To Set and Very Reliable!
Exclusive Select Adjust™ programming
Lithium battery back up stores programs without AC power or AA batteries
Stacking start times
Three independent programs
Three start times per program

DESCRIPTION	PART NUMBER
NELSON WEATHER RESISTANT TIMER 4 ZONES	8304
NELSON WEATHER RESISTANT TIMER 6 ZONES	8306
NELSON WEATHER RESISTANT TIMER 9 ZONES	8309
NELSON WEATHER RESISTANT TIMER 12 ZONES	8312

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

RAIN BIRD

Each member of the Rain Bird family of irrigation controllers is designed to be user friendly. Whether used for residential, commercial or industrial applications, even when there's no supplied power at all, Rain Bird controllers perform to perfection. Nobody else has programming that's simpler or easier to understand. Nobody else has a track record of reliability that even comes close.

DESCRIPTION	PART NUMBER
4 – 13 STATIONS DIGITAL MODULAR CONTROLLER*	ESP-4M
12 STATIONS DIGITAL RAINBIRD CONTROL ESP-12L	ESP12LX
16 STATIONS DIGITAL RAIN BIRD CONTROL ESP-16L	ESP-16LX
20 STATIONS DIGITAL RAIN BIRD CONTROL ESP-20L	ESP-20LX
24 STATIONS DIGITAL RAIN BIRD CONTROL ESP-24L	ESP-24LX
4 STATIONS MECHANICAL RAINBIRD CONTROL RC-4C	RC-4
7 STATIONS MECHANICAL RAINBIRD CONTROL RC-7	RC7
12 STATIONS MECHANIC RAINBIRD CONTROL RC-1260C	RC1260

*** Capacity to receive up to 3 Plug-In Station modules of 3 stations each (SM3).**

TORO

TMC-212 Series

The TMC-212 has an array of features with advanced, **modular** construction. Options such as indoor and outdoor models and a station count of two to twelve make it a fit for a variety of residential applications. It is simple to program and install, and its solid-state technology will stand the test of time.

Features

Three fully independent programs with four start times per program
Station count modularity from 2 to 12 stations in two-station modules
Hot-swappable station modules
Non-volatile memory requires no batteries
Module options available for standard- or high-surge protection
Three-year warranty on standard model, five-year warranty on high-surge model

DESCRIPTION	PART NUMBER
TORO CONTROLLER 2-12 STATIONS MODULAR	

Hunter

- Large LCD display for simplified programming
- Easy to read for schedule review and entry
- Three programs (A, B, C) with multiple start times
  Independent programming handles many different watering requirements
- Choice of independent day scheduling options
  Days of the week, odd/even or 31-day interval for maximum flexibility
- Holds programs indefinitely; excellent insurance against unreliable power
- Superior surge protection and self-diagnostic short circuit protection
- Microcircuits are protected from electrical spikes, no fuses to worry about

DESCRIPTION	PART NUMBER
HUNTER PRO-C 3 STATIONS BASE UNIT EXPAND TO 12 STATIONS.	PC-300

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DRIP IRRIGATION

FLEXIBLE PIPE BROWN

Drip In pressure compensating drip line delivers precise water application directly to the root zone. It is perfect for odd shaped or high wind areas with limited water supply or low pressure. The pressure compensating design makes it an excellent choice for slopes.

DESCRIPTION	PART NUMBER
AQUA-LINE A16-4-12PC-500B	11500080
AQUA-LINE A16-4-12PC-100B	11500090

QB2 BUBBLER

It is ideal for converting existing sprinkler systems to efficient low flow systems. It is designed to apply the desired amount of water directly to the plants during the time the sprinkler zone operates. Designed for tree, shrub, flower and ground cover planting beds. This bubbler can be placed on spray-head zones and matches sprinkler zone timing

DESCRIPTION	PART NUMBER
BUBBLER BLACK MED FLOW	12500774
BUBBLER RED HIGH FLOW	12500775

QUADRA BUBBLER

It is ideal for converting sprinkler systems to low flow because it is designed to apply the amount of water the plants need during the time the sprinkler zone operates. Designed for tree, shrub, flower and groundcover planting beds. Also, this bubbler is designed to replace spray head zones.

DESCRIPTION	PART NUMBER
QUADRA BUBBLER Q9633	Q9633

T-FILTER

Agricultural Products, Inc.
a Summa Industries Company

Their low profile design takes up less space, allowing for easier service and cleaning. The 316 stainless steel screen is available in 30, 50, 100, 150 and 200 mesh. Work at 150-PSI pressure Debris basin. Available in clear or black with a 3/4" drain for easy cleaning. Manufactured from chemical resistant material large screen area for longer interval between cleaning Standard EPDM or optional Viton seal

DESCRIPTION	PART NUMBER
T-FILTER BLACK SS SCREEN 1 1/2" 50 MESH	T-015C-50
T-FILTER BLACK SS SCREEN 1 1/2 ” 100 MESH	T-015C-100
T-FILTER BLACK SS SCREEN 1 1/2" 150 MESH	T-015C-150
T-FILTER BLACK SS SCREEN 1 1/2" 200 MESH	T-015C-200

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
T-FILTER BLACK SS SCREEN 2” 50 MESH	T-020C-50
T-FILTER BLACK SS SCREEN 2” 100 MESH	T-020C-100
T-FILTER BLACK SS SCREEN 2” 150 MESH	T-020C-150
T-FILTER BLACK SS SCREEN 2” 200 MESH	T-020C-200

Y-FILTER

These are designed to use a directional nozzle plate on the interior of the stainless steel screen. The spinning action keeps the debris in suspension to collect any discharge in the basin.
Plastic construction is light in weight and chemical resistant: Unique Spin Clean® centrifugal action keeps screen clean far longer than any conventional screen filter of the same size. Greatly extend service intervals. Two-piece threaded housing with O-ring seal for easy maintenance. Strong, stainless steel screens available in mesh sizes of 30, 50, 100, 150 (standard) and 200 Available with ball valve for flushing debris basin.

DESCRIPTION	PART NUMBER
Y FILTER 3/4" W/155 MESH	1903V-34P
Y FILTER 1" W/150 MESH	1903V-100P

AQUA JET ONE PIECE

DESCRIPTION	PART NUMBER
ONE PIECE AQUAJET 300 DEGREE	12500797

PVC NURSERY HEAD

DESCRIPTION	PART NUMBER
PVC NURS HEAD 1/4 ORANGE (90 DEGREE)	13P-02
PVC NURS HEAD 1/2 BLACK (180 DEGREE)	13P-05
PVC NURS HEAD FULL GREEN (360 DEGREE)	13P-10

FOGGER HEADS

DESCRIPTION	PART NUMBER
FOGGER ADAPTER 1/2 X 1/8	2010-02 FOG-02
FOGGER 5/16-24" BRASS	FOG-01
FOGGER HEADS 1/8 BRASS	FOG-02

ROTOR SPRAY (MICRO SPINNER)

DESCRIPTION	PART NUMBER
MICRO SPINNER 10/32 THREA	MST-03 MST-05

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

FUNNY PIPE/FITTING

Molded high impact plastic. Barbed insert requires no clamps. Spiral allows twist in insertion into pipe.

DESCRIPTION	PART NUMBER
FUNNY FITTING ADAPTER 1/2"	136-005
FUNNY FITTING ADAPTER 3/4"	136-007
FUNNY FITTING COUPLING 3/8”	0203
FUNNY FITTING ELBOW 3/8”	112-003
FUNNY FITTING ELBOW 1/2"	0201
FUNNY FITTING ELBOW 3/4"	0202
FUNNY FITTING TEE 1/2"	105-005
FUNNY FITTING TEE 3/4"	105-007
FUNNY FITTING TEE 3/8”	105-003
FUNNY PIPE 100 FT ON ROLL	850-25
RAIN BIRD 3/4" SWING BARB	SBE075
RAIN BIRD 1/2" SWING BARB	SBE050

PVC PIPE/FITTINGS

We carryout a variety type of PVC pipes and fittings; we have a Schedule 160, Schedule 40 and Schedule 80.

RUST CONTROL SYSTEM

FORMULAS

We have chemicals and systems used to treat well water, fertilize and prevent rust stains found in residential, industrial and commercial irrigation systems as well as plant nursery irrigation systems.

DESCRIPTION	PART NUMBER
FORMULA # 2000 1 GAL	2666
FORMULA # 500 1 GAL.	2656-GL
GRASSSO GREEN 1 GAL	2655
STAIN REMOVER 1 GAL	2662
SIPHONING SYSTEM 30 GAL	2650

One quart of Rid O’ Rust **Formula 500** will treat 125,000 gallons of well water with 1 PPM (Part Per Million) iron. It is most effective when the pH of the water is 6.0 or higher and hardness measures 15 GPG (Grains Per Gallon) or less. Irrigation Applications Only.

One gallon of Rid O’ Rust **Formula 2000** will treat 125,000 gallons of well water with 1 PPM iron and hardness of 15 GPG or more. Irrigation Applications Only

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

Grass So Green Formula designed to be fed through the irrigation system and provide a steady stream of a small quantity of nutrient • will not burn your grass like granular fertilizer • will not run off and pollute bodies of water.
Grass So Green Fertilizer can be mixed in the same feeder system with Rid O' Rust Stain Prevention Formulas.

Determining Dosage

SIZE OF LAWN (Square Feet)	GALLONS OF GRASS SO GREEN TO BE APPLIED PER MONTH
1000	0.5
2000	1.0
3000	1.5
4000	2.0
5000	2.5

Determine how many months or portions of a month it takes for your feeder system to empty and dose accordingly. Example: if it takes two months for your feeder to empty and you have 2000 square feet of lawn, put two gallons of Grass So Green into the tank.

CHEMICAL FEED INJECTS

Chlorine is injected directly into the water line to kill sulfur smells. Much less chlorine is used than with the other methods

DESCRIPTION	PART NUMBER
CHEM-FEED INJECT 1.4 115V	C1500N110V
CHEM-FEED INJECT 1.4 230V	C1500N220V
CHEM-FEED INJECT 2.4 230V	C15N222R000V10
CHEM-FEED INJECT 2.4 115V	C15N202X000V10

SPRINKLER HEAD

IMPACT

Senninger

DESCRIPTION	PART NUMBER
IMPACT 1/2-3/4" Female Inlet with NOZZ#8, 1-4 GPM	2009HD-1-3/4F
IMPACT ADJ. 3/4 Male Inlet with NOZZ#11, 2-22 GPM	4123PC-13/4F
IMPACT 3/4" Male Inlet with NOZZ#16X8, 2-22 GPM	5023-2-3/4M
IMPACT 1" Male Inlet with NOZZ#20X10, 8-36 GPM	7025-2-1M
IMPACT 11/4" Male Inlet with NOZZ#32X16	8025HS211/4F

CHAMPION IRRIGATION, LLC

DESCRIPTION	PART NUMBER
CHAMPION BRASS IMPULSE 1/2" M.T S	U61-DP
CHAMPION BRASS IMPULSE 3/4" MALE	U260-DP
CHAMPION BRASS IMPULSE 1" MALE	U360-A

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

NELSON

DESCRIPTION	PART NUMBER
BRASS IMPULSE 1/2" MALE	260099
BRASS IMPULSE 3/4" FEMALE	010098
BRASS IMPULSE 1" MALE	030096
BRASS IMPULSE 1" FEMALE	040092
NELSON IMPULSE ADJ BETA, 1/2" INLET, 36-43 FT, 1.9-5.2,30-60 PSI.	1373 1370

Orbit

DESCRIPTION	PART NUMBER
BRASS IMPACT HEAD 1/2	55003
ORBIT JET PLASTIC 1/2" Male Inlet, IMPULSE, 20-40 FT	55010
IMPACT SPRINKLER 1/2" ZINC	58001
IMPACT SPRINKLER 1/2" ADJ	58006

NOZZLES

K RAIN

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
K-R NOZZLE 12 QUARTER CIRCLE	P12Q		11' TO 14'
K-R NOZZLE 12 HALF CIRCLE	P12H		11' TO 14'
K-R NOZZLE 12 3/QUARTER CIRCLE	P12TQ		12' TO 15'
K-R NOZZLE 12 FULL CIRCLE	P12F		10' TO 14'
K-R NOZZLE 15 QUARTER CIRCLE	P15Q		15' TO 18'
K-R NOZZLE 15 HALF CIRCLE	P15H		14' TO 17'
K-R NOZZLE 15 3/QUARTER CIRCLE	P15TQ		13' TO 16'
K-R NOZZLE 15 FULL CIRCLE	P15F		13' TO 17'
K-R NOZZLE 15 CENTER STRIP	15CS		4'x24' TO 4'x30'

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

K-R NOZZLE 15 END STRIP	15ES		4'x12' TO 4'x15'
K-R NOZZLE 15 HIGH LOW	15HL		H14'xL4'x28' H15'xL5'x32'
K-R NOZZLE 15 SIDE STRIP	15SS		4'X28' TO 5'x32'

ADJUSTABLE KV SERIES

DESCRIPTION	PART NUMBER	OPERATING RANGE (FEET)
K-R ADJ NOZZLE N0360-15 KV15	N0360-15	13' TO 16'

NELSON

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
NELSON NOZZLE 8-QFLT (Black, Flat)	7281		6' TO 8'
NELSON NOZZLE 8-HFLT (Black, Flat)	7282		6' TO 8'
NELSON NOZZLE 8-FFLT (Black, Flat)	7284		6' TO 8'
NELSON NOZZLE 10-ADJ **(RED)**	7270		**10' TO 11'**
NELSON NOZZLE 10-QLA (Black, Low Angle)	7271		7' TO 10'
NELSON NOZZLE 10-HLA (Black, Low Angle)	7272		7' TO 10'
NELSON NOZZLE 10-FLA (Black, Low Angle)	7274		7' TO 10'
NELSON NOZZLE 12 MULTI-ARC **(GREEN)**	7370		**12' TO 13'**
NELSON NOZZLE 12-Q (Black)	7371		9' TO 12'
NELSON NOZZLE 12-H (Black)	7372		9' TO 12'
NELSON NOZZLE 12-TQ (Black)	7373		9' TO 12'
NELSON NOZZLE 12-F (Black)	7374		9' TO 12'
NELSON NOZZLE 12TT (Black)	7375		9' TO 12'
NELSON NOZZLE 12T (Black)	7376		9' TO 12'
NELSON NOZZLE 15 MULTY-ARC **(BLACK)**	7070		**14' TO 16'**

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

NELSON NOZZLE 15-Q (Black)	7071		11' TO 15'
NELSON NOZZLE 15-H (Black)	7072		11' TO 15'
NELSON NOZZLE 15-TQ (Black)	7073		11' TO 15'
NELSON NOZZLE 15-FULL (Black)	7074		11' TO 15'
NELSON NOZZLE 15TT (Black)	7075		11' TO 15'
NELSON NOZZLE 15T (Black)	7076		11' TO 15'
NELSON NOZZLE 15SQ (Black, Square)	7081		18x18 TO 24x24
NELSON NOZZLE 15-EST (Black, End Strip)	7082		4x13 TO 4x15
NELSON NOZZLE 15-CST (Black, Center Strip)	7083		4x26 TO 4x30
NELSON NOZZLE 15SST (Black, Side Strip)	7084		4x26 TO 4x30
NELSON NOZZLE 7' MULTI-ARC **(BROWN)**	7170		**7' TO 8'**
NELSON NOZZLE 17'-MULTI-ARC **(GRAY)**	7470		**16' TO 18'**
NELSON NOZZLE FRONT CONTR	2291RC		

RAIN BIRD

SERIES VAN

DESCRIPTION	PART NUMBER	OPERATING RANGE (FEET)
RAIN BIRD 6 VAN ADJ NOZZ **(ORANGE)**	6VANADJ	4 TO 6
RAIN BIRD 8 VAN ADJ **(GREEN)**	8VANADJ	6 TO 8
RAIN BIRD 10 VAN ADJ **(BLUE)**	10VANADJ	8 TO 10
RAIN BIRD 12 VAN ADJ **(BROWN)**	RB12VAN	10 TO 12
RAIN BIRD 15 VAN ADJ **(BLACK)**	RB15VAN	12 TO 15
RAIN BIRD 18 VAN ADJ **(TAN)**	P10018	14 TO 18

8 SERIES MPR (GREEN)

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
RAIN BIRD 8F NOZZLE	A47018		5 TO 8
RAIN BIRD 8H NOZZLE	A47019		5 TO 8

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

RAIN BIRD 8Q NOZZLE	A47020		5 TO 8
RAIN BIRD 8HFLT NOZZLE (FLAT)	A47075		6 TO 8

10 SERIES MPR (BLUE)

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
RAIN BIRD 10F NOZZLE	A47015		7 TO 10
RAIN BIRD 10H NOZZLE	A47016		7 TO 10
RAIN BIRD 10Q NOZZLE	A47017		7 TO 10

12 SERIES MPR (BROWN)

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
RAIN BIRD 12F NOZZLE	RB12F		9 TO 12
RAIN BIRD 12H NOZZLE	RB12H		9 TO 12
RAIN BIRD 12Q NOZZLE	RB12Q		9 TO 12
RAIN BIRD 12TQ NOZZLE	A47010		9 TO 12

15 SERIES MPR (GRAY)

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
RAIN BIRD 15F NOZZLE	RB15F		11 TO 15
RAIN BIRD 15H NOZZLE	RB15H		11 TO 15
RAIN BIRD 15Q NOZZLE	RB15Q		11 TO 15

STRIP SERIES (BLACK)

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
RAIN BIRD 15 EST NOZZLE	RB15EST		4x13 TO 4x15
RAIN BIRD 15 SST NOZZLE	A47008		4x26 TO 4x30
RAIN BIRD NOZZLE 15CST	15CST		4x26 TO 4x30
RAIN BIRD NOZZLE 15 LCS	15LCS		3x11 TO 4x15

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

RAIN BIRD NOZZLE 15 RCS	15RCS		3x11 TO 4x15
RAIN BIRD NOZZLE 9 SST	9SST		9x15 TO 9x18

TORO

5 feet Series

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
TORO 570 5F RED NOZZLE	89-1788		4' TO 6'
TORO 570 5H RED NOZZLE	89-1791		4' TO 6'
TORO 570 5Q RED NOZZLE	89-1793		4' TO 6'
TORO 570 5T RED NOZZLE	89-1792		4' TO 6'
TORO 570 5TQ RED NOZZLE	89-1789		4' TO 6'
TORO 570 5TT RED NOZZLE	89-1790		4' TO 6'

8 feet Series

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
TORO 570 8F GREEN NOZZLE	89-1782		7' TO 9'
TORO 570 8H GREEN NOZZLE	89-1785		8' TO 9'
TORO 570 8Q GREEN NOZZLE	89-1787		7' TO 9'
TORO 570 8T GREEN NOZZLE	89-1786		7' TO 9'
TORO 570 8TQ GREEN NOZZLE	89-1783		7' TO 9'
TORO 570 8TT GREEN NOZZLE	89-1784		7' TO 9'

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

10 feet Series

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
TORO 570 10F BLUE NOZZLE	89-1776		9' TO 11'
TORO 570 10H BLUE NOZZLE	89-1779		9' TO 12'
TORO 570 10Q BLUE NOZZLE	89-1781		9' TO 12'
TORO 570 10T BLUE NOZZLE	89-1780		9' TO 12'
TORO 570 10TQ BLUE NOZZLE	89-1777		9' TO 11'
TORO 570 10TT BLUE NOZZLE	89-1778		9' TO 11'

12 feet Series

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
TORO 570 12F BROWN NOZZLE	89-1770		11' TO 13'
TORO 570 12H BROWN NOZZLE	89-1773		11' TO 14'
TORO 570 12Q BROWN NOZZLE	89-1775		11' TO 13'
TORO 570 12T BROWN NOZZLE	89-1774		11' TO 13'
TORO 570 12TQ BROWN NOZZLE	89-1771		11' TO 13'
TORO 570 12TT BROWN NOZZLE	89-1772		11' TO 13'

15 feet Series

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
TORO 570 15F BLACK NOZZLE	89-1764		13' TO 16'
TORO 570 15H BLACK NOZZLE	89-1767		13' TO 16'
TORO 570 15Q BLACK NOZZLE	89-1769		14' TO 16'
TORO 570 15T BLACK NOZZLE	89-1768		14' TO 16'

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

TORO 570 15TQ BLACK NOZZLE	89-1765		13' TO 16'
TORO 570 15TT BLACK NOZZLE	89-1766		14' TO 16'

Special Patterns

DESCRIPTION	PART NUMBER	PATTERN	OPERATING RANGE (FEET)
SPECIAL PATTERN 2SST NOZZLE	89-1799		2x5 TO 3x7
SPECIAL PATTERN 4EST NOZZLE	89-1795		3x12 TO 6x20
SPECIAL PATTERN 4SST NOZZLE	89-1798		4x24 TO 5x33
SPECIAL PATTERN 4CST NOZZLE	89-1794		3x24 TO 4x31
SPECIAL PATTERN 9SST NOZZLE	89-1797		9x18 TO 10x22

POP UPS

We stock a wide range of heads. For all irrigation systems

DESCRIPTION	PART NUMBER
HUNTER ADJ 2" POPUP 15" A, 1/2" INLET, 10-15 FT, 0.2-5.3 GPM, 20-40 PSI.	PS0215
HUNTER ADJ 4" POPUP 17" A, 1/2" INLET, 10-17 FT, 0.2-5.3 GPM, 20-40 PSI.	PS0417
HUNTER 4" HEADS SRS-04, 1/2" INLET, ADJUSTABLE NOZZLE: 7-17 FT, 0.17-552 GPM, 15-70 PSI.	SRS04

DESCRIPTION	PART NUMBER
K-R 12 POP-UP BODYONLY, 1/2" INLET, 0.5 GPM, 20-50 PSI.	71201
K-R 3 POP-UP ONLY 73001, 1/2" INLET, 0.5 GPM, 20-50 PSI.	73001
K-R 4 POP-UP BODY ONLY, 1/2" INLET, 0.5 GPM, 20-50 PSI.	74001
K-R 6 POP-UP BODY ONLY, 1/2" INLET, 0.5 GPM, 20-50 PSI.	76001

DESCRIPTION	PART NUMBER
NELSON POP-UP 21/2" SPRAY, 1/2" INLET, 0.2 GPM, 15-30 PSI.	6302
NELSON POP-UP 4" SPRAY, 1/2" INLET, 0,2 GPM, 15-30 PSI.	6304
NELSON POP-UP 6" SPRAY, 1/2" INLET, 0.2 GPM, 15-30 PSI.	6306

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
SUPER JET POP-UP IMPACT	55100

DESCRIPTION	PART NUMBER
RAIN BIRD 2” POP UP 1802, 1/2" FEMALE INLET, 15-70 PSI.	1802
RAIN BIRD 3” POP UP 1803, 1/2" FEMALE INLET, 15-70 PSI.	1803
RAIN BIRD 4” POP UP 1804, 1/2" FEMALE INLET, 15-70 PSI.	1804
RAIN BIRD 6” POP UP 1806, 1/2" FEMALE INLET, 15-70 PSI.	1806

DESCRIPTION	PART NUMBER
TORO 570 POPUP 2” LESS NOZZLE, 1/2" FEMALE INLET, 20-50 PSI	89-5807
TORO 570 POPUP 3” LESS NOZZLE, 1/2" FEMALE INLET, 20-50 PSI.	89-3977
TORO 570 POPUP 4” LESS NOZZLE, 1/2" FEMALE INLET, 20-50 PSI..	89-3978
TORO 570 POPUP 6" LESS NOZZLE, 1/2" FEMALE INLET, 20-50 PSI.	89-3979
TORO 570 POPUP 12” LESS NOZZLE, 1/2" FEMALE INLET, 20-50 PSI.	89-3981

ROTORS

We stock a wide variety of rotors from 1/2 to 1 inlet. Designed for all residential and commercial irrigation systems

DESCRIPTION	PART NUMBER
HUNTER POP-UP PGJ 4, 1/2" INLET**, 15-37 FT, 0.64-5.3 GPM, 30-50 PSI.**	PGJ04
HUNTER POP-UP PGP-ADJ CIR 3/4" INLET, **22-52 FT, 0.5-14.1 GPM, 30-70 PSI**.	PGPADJ

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
PRO PLUS 12” HIGH POP, 3/4" INLET, 28-50 FT, 0.5-10 GPM, **7-70 PSI. ADJ 40-360º.**	11003-HP
PRO PLUS GEAR DRIVEN, 3/4" INLET, 28-50 FT, 0.5-10 GPM, **30-70 PSI, ADJ 40-360º.**	11003
MINI PRO K1 13003, 1/2" INLET, 17-28 FT, 0.75-3.3 GPM, **20-70 PSI, ADJ 40-360º.**	13003

DESCRIPTION	PART NUMBER
POP-UP IMPACT MINIROT. (Green), 1/2" INLET, **36-38 FT**, **1.9-2.7 GPM**, **30-60 PSI**.	6702
POP-UP IMPACT MINIROT. (Black), 1/2" INLET, **40-43 FT**, **3.6-5.2 GPM**, **30-60 PSI**.	6704
PRO IMPACT* MINIROT. 1/2" and 3/4" INLET, **25-42 FT, 40-60 PSI**	6700

* Include 5 easy Interchangeable color-code nozzle and 2 low angle nozzle

DESCRIPTION	PART NUMBER
RAIN B. MAXIPAW PART/FU, IMPACT, 1/2" INLET**, 22-45 FT**, **1.5-8.4 GPM**, 25-60 PSI.	2045-A
RAIN BIRD 4” POPUP PC 3.0, 3/4" INLET, **25-50 FT, 0.73-9.63 GPM**, 25-65 PSI.	5004PC3

DESCRIPTION	PART NUMBER
TORO 2001 ADJUST.30-360º, 1” INLET, **48-71 FT, 5.6-31.3 GPM, 40-80 PSI**	2001
SUPER 600, 3/4" INLET, **35-50 FT, 1.20-6.71 GPM, 25-50 PSI PC 2.5 ADJ ARC**	35-1214
SUPER 600, 3/4" INLET, **35-50 FT, 25-50 PSI, PC 5.0 ADJ ARC**	35-1216
SUPER 700, 3/4" INLET, **21-52 FT, 1.11-9.75 GPM, 25-50 PSI, ADJ ARC W/O NOZ**	35-8929

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

VALVES

ELECTRIC VALVES

Irritrol SYSTEMS

DESCRIPTION	PART NUMBER
ELECTRIC GLOBE 1" VALVE W/FC, **5- 300 GPM, 10-200 PSI**	100P1
ELECTRIC GLOBE 1.5" ANGLE VAL, **5-300 GPM, 10-200 PSI**.	100P1.5
ELECTRIC GLOBE 2" ANGLE VALVE, **5-300 GPM, 10-200 PSI**.	100P2
ELECTRIC GLOBE 3" ANGLE VALVE **5-300 GPM, 10-200 PSI**.	100P3
ELECTRIC GLOBE 11/2" ANGLE VA, **5-120 GPM, 20-150 PSI**.	216B
ELECTRIC GLOBE 2" ANGLE VALVE, **5-120 GPM, 20-150 PSI**.	217B
ELECTRIC GLOBE 1", **10-180 GPM, 10-150 PSI**.	700-1
ELECTRIC GLOBE 11/2", **10-180 GPM, 10-150 PSI**.	7001.5
ELECTRIC GLOBE 2" ULTRA FLOW, **10-180 GPM, 10-150 PSI**.	700-2
ELECTRIC FLOW CONTROL 1" VALVE 24 VOLT COIL	205TF
SOL/VALVE ANTISIPHON 1", **25-30 GPM, 10-150 PSI.**	2713APR

K RAIN

DESCRIPTION	PART NUMBER
K-R 1" ELECTRIC SOLENOID TXS, **0.75-35 GPM, 20-150 PSI**	7001

NELSON

DESCRIPTION	PART NUMBER
NELSON DURALIFE **VALVE ACTUATOR**, LITHIUM BATTERY, LCD DISPLAY	8014
NELSON DURALIFE **VALVE ACTUATOR** W/SENSOR PORT. LCD DISPLAY	8014SR

RAIN BIRD

DESCRIPTION	PART NUMBER
ELECTRIC VALVE 1", 24V, **0.2-40 GPM, 15-150 PSI**.	100-DV
ELECTRIC VALVE 1" 100PEB, **0.25-200 GPM, 20-200 PSI.**	100PEB
ELECTRIC VALVE 11/2" PEB, **0.25-200 GPM, 20-200 PSI**.	150PEB
ELECTRIC VALVE 2" PEB, **0.25-200 GPM, 20-200 PSI**.	200PEB

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
TORO ELECTRIC VALVE 1", 24 V INLINE/ANG, **5-20 GPM, 20-150 PSI.**	252-06-04
TORO ELECTRIC VALVE 11/2", 24 V, INLINE/ANG, **25-70 GPM, 20-150 PSI**.	252-26-06
TORO ELECTRIC VALVE 2", 24 V, INLINE/ANG, **60-90 GPM, 20-150 PSI.**	252-26-08
TORO EZ FLO ELECTRIC VALVE 1", INLINE FxF, **0.25-30 GPM, 10-150 PSI.**	EZF-26-04
TORO ELECTRIC 3" IN-LINE VALVE, **150-210 GPM, 10-220 PSI.**	P220-26-00
TORO ELECTRIC 1" IN-LINE VALVE, **5-35 GPM, 10-220 PSI**.	P220-26-04
TORO ELECTRIC 11/2" IN-LINE VALVE, **30-55 GPM, 10-220 PSI.**	P220-26-06
TORO ELECTRIC 2" IN-LINE VALVE, **80-120 GPM, 10-220 PSI.**	P220-26-08

HIDRAULIC VALVES

Durability is a fit for commercial applications and their plastic construction makes them an economical option. With several configurations to choose from, including contaminant-resistant valves, 252 Series provides flexibility.

DESCRIPTION	PART NUMBER
HYDRAULIC VALVE TORO 11/2", INLINE/ANG, **25-90 GPM, 20-150 PSI.**	252-21-06
HYDRAULIC VALVE TORO 2", INLINE/ANG, **60-90 GPM, 20-150 PSI**.	252-21-08

INDEXING VALVES

Economical way to automate multiple zoned residential and small commercial irrigation system. Residential and small commercial applications

DESCRIPTION	PART NUMBER
FIMCO 2 ZONES 11/4" MINI, **10-50 GPM**	2002
FIMCO 3 ZONES 11/4" MINI, **10-50 GPM**.	2003
FIMCO 4 ZONES 11/4" MINI, **10-50 GPM**.	2004
FIMCO 5 ZONES 11/4" MINI, **10-50 GPM**.	2005
FIMCO 2 ZONES 11/4", **10-75 GPM**.	3002

DESCRIPTION	PART NUMBER
FIMCO 4 ZONES 11/4", **10-75 GPM**.	3004
FIMCO 4 ZONES 11/2", **35-75 GPM**.	4004
FIMCO 5 ZONES 1", **10-21 GPM**.	1005
FIMCO 5 ZONES 11/4", **10-75 GPM**.	3005
FIMCO 5 ZONES 11/2", **35-75 GPM**.	4005

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
FIMCO 2 ZONES 11/2", **35-75 GPM**.	4002
FIMCO 2 ZONES 1", **10-21 GPM.**	1002
FIMCO 3 ZONES 1", **10-21 GPM.**	1003
FIMCO 4 ZONES 1", **10-21 GPM.**	1004
FIMCO 3 ZONES 11/4, **10-75 GPM.**	3003
FIMCO 3 ZONES 11/2, **35-75 GPM.**	4003

DESCRIPTION	PART NUMBER
FIMCO 6 ZONES 1", **10-21 GPM**.	1006
FIMCO 6 ZONES 11/4" **10-75 GPM.**	3006
FIMCO 6 ZONES 11/2", **35-75 GPM.**	4006
FIMCO 7 ZONES 1", **10-21 GPM**.	1007
FIMCO 8 ZONES 1", **10-21 GPM.**	1008

The 6000 line of indexing valves offers exceptional reliability and durability even under the dirtiest water conditions

The 4000 line offer a reliable, economical way to automate multiple zoned residential and small commercial irrigation systems.

DESCRIPTION	PART NUMBER
KR 4 O/L V 11/4" 2 ZONES, **10-50 GPM, 2-10 PSI.**	4402
KR 4 O/L V 11/4" 3 ZONES, **10-50 GPM, 2-10 PSI**.	4403
KR 4 O/L V 11/4" 4 ZONES, **10-50 GPM, 2-10 PSI.**	4404
KR 4 O/L VAL 2 ZONES, **15-150 GPM, 2-13 PSI.**	6402
KR 4 O/L VAL 3 ZONES, **15-150 GPM, 2-13 PSI**.	6403
KR 4 O/L VAL 4 ZONES, **15-150 GPM, 2-13 PSI**.	6404
KR 6 O/L V 11/4X1 5 ZONES, **10-40 GPM, 2.5-11.5 PSI.**	4605
KR 6 O/L V 11/4X1 6 ZONES, **10-40 GPM, 2.5-11.5 PSI.**	4606
KR 6 O/L VAL 5 ZONES, **10-150 GPM, 2-14 PSI.**	6605
KR 6 O/L VAL 6 ZONES, **10-150 GPM, 2-14 PSI.**	6606

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

PUMP STATIONS

DOMESTIC WATER

BOOSTER SYSTEMS

This product line offers a Pre Packaged Turn Key Solution to fulfill the needs of Mechanical, Plumbing Contractors and End-Users as well.

Booster systems available in variable or speed
UL approved as a packaged system.
Simplex, Duplex and Triplex configurations available.
Factory tested and certified.
Dedicated customer service.
Timely delivery.
Custom manufacturing to your requirements
Manufacture capabilities to meet pre-existing building/pipe conditions.

- Engineering and Design capabilities.
- Single source Responsibilities.
- Shipped Fully Assembled.
- Compact and Affordable.
- Pre-piped and Wired.
- Design-Manufacturing- Technical Support.
- Energy efficient.

IRRIGATION

BLUE CUBE

BlueCube® is the irrigation solution to the commercial landscaping industry. Providing high quality pump stations, made with the finest combination of pumps - electric motors- controls available in the market. The BlueCube® pump station is fully integrated able to communicate with a wide variety of irrigation controllers (timers). This communication capability is pre-engineered in our labs, to minimize programming and start-up procedure. The BlueCube® is available in a re-enforced aluminum Enclosure. Easy to install with full size hinged doors that exposes the interior providing access for installation and maintenance. The BlueCube® irrigation pump station offers Durability, Efficiency and User-Friendly controls and well-engineered interface.

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

Features:

- Pump: ITT Gould®/Centrifugal 3656. Bronze fitted.
- Electric Motor: WEG. W21 High Efficiency.
- Controls: UL®508. Control Panels.
- UL® Certifications
- Industrial Control Panels (NITW)
- Industrial Control Panels Certified for Canada (NITW7)
- Packaged Pumping Systems (QCZJ)
- Packaged Pumping Systems Certif. fr Canada (QCZ57)

VARIABLE SPEED

- First Pump Industry Oriented Variable Speed Drive.
- Easy to understand set up and operation.
- Cell phone like keypad to change pressure.
- NEMA4X enclosed and fan cooled for longer VFD life.
- Temperature controlled enclosure.

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

PUMPS

We are largest stocking distributor of water pumps:

- Irrigation
- Sewage/sump
- Pool

ACCESSORIES

BASKET STRAINER

Device, placed on the suction side of a pump, which contains a removable strainer basket designed to trap debris in the waterflow with a minimum of flow restriction

DESCRIPTION	PART NUMBER
SUCTION TRAP PKG51 6" CAST IRON *(for C, CC and D series pump) 2" NPT	PKG51
SUCTION TRAP PKG98 8" CAST IRON *(for C, CC and D series pump) 3" NPT	PKG98
SUCTION TRAP PKG99 8" BRASS	PKG99
STRAINER PLASTIC TRAP PKG 5"	PKG115
STRAINER PLASTIC TRAP PKG 6"	PKG161

*** See STARITE Self-Priming Pump D Series**

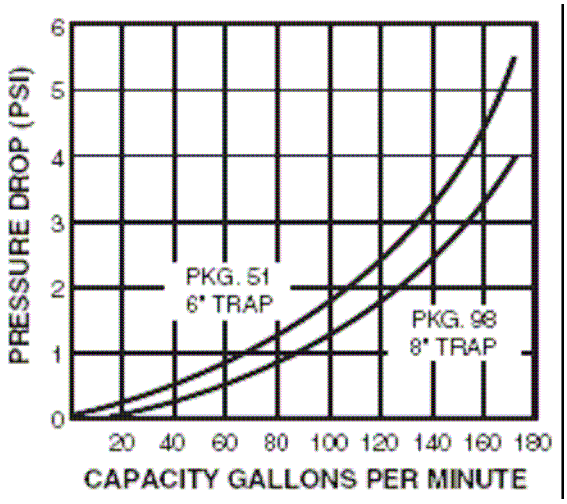

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

Sure Flow. 125# A.N.S.I. Flanged basket strainers in Cast Iron are available with bolted or quick release clamped cover. Clamp cover units (Model BFC) are ideally suited for applications where frequent clean out of the basket is expected. Having a spare, clean basket on hand will greatly reduce the cleaning time, and differential pressure gauges, with alarms can be supplied to get the maximum on-stream time between cleaning cycles.

CONSTRUCTION:
Body & Cover, ASTM SPEC A126, Class B
Baskets are Stainless Steel.





Size		A	B	C	D	Blow Off NPT	Clear-ance For Bskt Removal
Inches	Prefix						
2	0200	8 1/8	5	3 3/4	7 1/2	3/4	5 3/8
2 1/2	0250	8 1/4	5 3/8	4 5/16	8	3/4	6 5/16
3	0300	9 7/8	6 1/2	4	8	3/4	8
4	0400	11 1/2	8	6 9/16	10 1/2	1	9 5/16
5	0500	13 1/8	8	7	11 1/2	1	10 1/4
6	0600	14 7/8	8 5/8	6 5/8	12	1	11 1/8
8	0800	18 11/16	11 3/4	9	15	1	15 9/16
10	1000	20 1/8	13 3/4	10 1/2	15	1	18
12	1200	26 1/4	16 3/8	13 1/8	17 1/2	1	23 1/4
14	1400	30 1/4	22 3/8	14 1/2	—	2	26 1/4
16	1600	33 1/8	23 5/8	15 9/16	—	2	28 1/8
18	1800	38 3/8	28 3/8	16	—	2	33 3/8
20	2000	41 1/2	32 3/8	17 3/8	—	2	37 3/8

DESCRIPTION	PART NUMBER
STRAINER BASKET CAST IRON 3" CLAMPED	BFC125C3
STRAINER BASKET CAST IRON 4" CLAMPED	BFC125C4

SUCTION ADAPTORS

DESCRIPTION	PART NUMBER
SHALLOW WELL ADAPTER KIT	FHSJ10
SHALLOW WELL ADAPTER KIT	FHSJ15
SHALLOW WELL ADAPTER KIT	FHSJ20

See GOULDS jet pumps HSJ model

DESCRIPTION	PART NUMBER
ADAPTER FLANGE 2" PKG53 *	PKG53
ADAPTER FLANGE 21/2" PKG72 *	PKG72
ADAPTER FLANGE 3" PKG73 *	PKG73
CAST IRON FLANGE 3" SUCTION FOR REMOTE INSTALLATION	PKG76

See STARITE Self-Priming Pump D Series

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

IN-LINE STRAINER

180-degree in-line "T" style installation, Increased effective screen area.
Case Quantity = 10 filters per case.
All filters are individually boxed to prevent loss or damage.
60 mesh, 254 micron, .010, 60 mesh 254 micron, .01 100 mesh, 152 micron, .006.

DESCRIPTION	PART NUMBER
IN-LINE FILTER VU-FLOW 1”	NT100-60P
IN-LINE FILTER VU-FLOW 1 1/2"	NT150-60P
IN-LINE FILTER VU-FLOW 2”	NT200-60P

DIAPHRAGM PUMP (HAND)

The pumps have reinforced diaphragms and flapper valves and are available with thru-deck mounting capability.
APLICATIONS: Dewater bilges and sumps aboard boats of all kinds, Dewater construction trenches, meter boxes. pits, and virtually any other industrial site, Empty trapped plumbing vessels, basement areas, and large liquid collection systems.

GUZZLER PUMP

DESCRIPTION	PART NUMBER
GUZZLER PUMP 3/4" M 400H	400H

FLOAT SWITCH

Float switch contains a stainless steel tube switch that is completely encapsulated in a polyurethane resin.

DESCRIPTION	PART NUMBER
FLOAT SWITCH B1S1C1-20 PUMP DOWN YELLOW	2900-20
FLOAT SWITCH B1S1C1-15 PUMP UP YELLOW	2901-15
FLOAT SWITCH B1S1C1-20 RED	2901
FLOAT SWITCH B1S1C1-30 PUMP DOWN	2900-30
SJE 20' PUMP DOWN 2 WIRES	29389
JSS 30' PUMP DOWN SWITCH WITHOUT PLUG	29390
SJE 15' PUMP UP WITHOUT PLUG 115 V	29393
PUMP SWITCH 10 F/1/2HP 1P DOUBLE THROW PC	1004834

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

PRESSURE GAUGE

DRY

DESCRIPTION	PART NUMBER
PG. 31/2 LM 300 PSI	P-500
PG.2 ECONO 0-30 PSI/KPA	101D-204C
PG.2 ECONO 0-60 PSI/KPA	201
PG.2 ECONO 0-100 PSI/KPA	101D-204E
PG.2 ECONO 0-200 PSI/KPA	101D-204G
PG.21/2 VAC GAUGE 30 PSI	PGV-30
PG.2 ECONO VAC GAUGE	PGV30

LIQUID FILLED

DESCRIPTION	PART NUMBER
PG.LIQUID FILLED 1/4" 0-100 PSI	711
PG.LIQUID FILLED 1/4" 0-100 PSI	201L-254E
PG.LIQUID FILLED 1/4" 0-200 PSI	201L-254G
PG.LIQUID FILLED 1/4" 0-300 PSI	Q807
PG.4 LIQUID FILLED 1/4" 300 PSI	PG40-300-G

PRESSURE SWITCH

DESCRIPTION	PART NUMBER
PRESSURE SWITCH 20/40LOW LEV	9013FSG2J20M4
PRESSURE SWITCH 20/40	9013FSG2J20
PRESSURE SWITCH 30/50	9013FSG2J21
PRESSURE SWITCH 30/50 LOW/CUT	9013FSG2J21M4
PRESSURE SWITCH 40/60	9013FSG2J24
PRESSURE SWITCH 60/80	9013FYG2J25

PUMP CONNECTOR

Sure flow Equipment Inc.
Your Single Source For Industrial Valves & Strainers

DESCRIPTION	PART NUMBER
PUMP CONNECTOR VIBRATION COUP 2"	0200/AMS
PUMP CONNECTOR 2-1/2" VIBRATION COUP.	0250/AMS

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
PUMP CONNECTOR 3" VIBRATION COUP.	0300/AMS
PUMP CONNECTOR 4" VIBRATION COUP.	0400/AMS
PUMP CONNECTOR 5" VIBRATION COUP.	0500/AMS
PUMP CONNECTOR 6" VIBRATION COUP.	0600/AMS

PUMP COVERS

We carry a wide variety of cast iron or plastic pump that range from 3/4hp-5hp

PLASTIC PUMP COVER

DESCRIPTION	PART NUMBER
PUMP COVER PLASTIC	38318
PUMP COVER RUGGED BLACK	265075

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

CENTRIFUGAL PUMPS

316SS PUMPS

Superior materials of construction: AISI type 316l stainless steel pump parts for reduced corrosion and improved strength and ductility.
Closed coupled design: Compact design saves space and simplifies maintenance.
Frame drive motors:
Standard NEMA design T-FRAME or JM motors in single or three phases.
Suction and discharge flanges: mate with ANSI class 150 flanges
Applications: Water Circulation, Booster Systems, Liquid Transfer, HVAC pump replacements, General service pumping.

PERFORMANCE COVERAGE, 3500 AND 1750 RPM

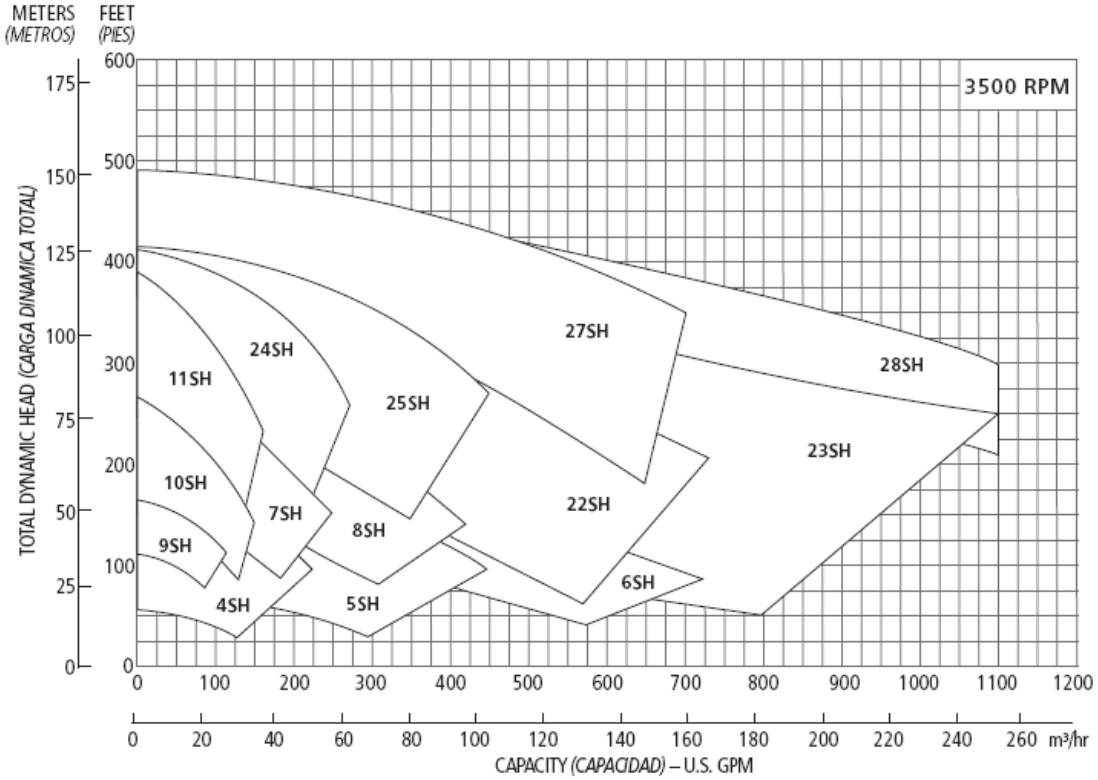

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

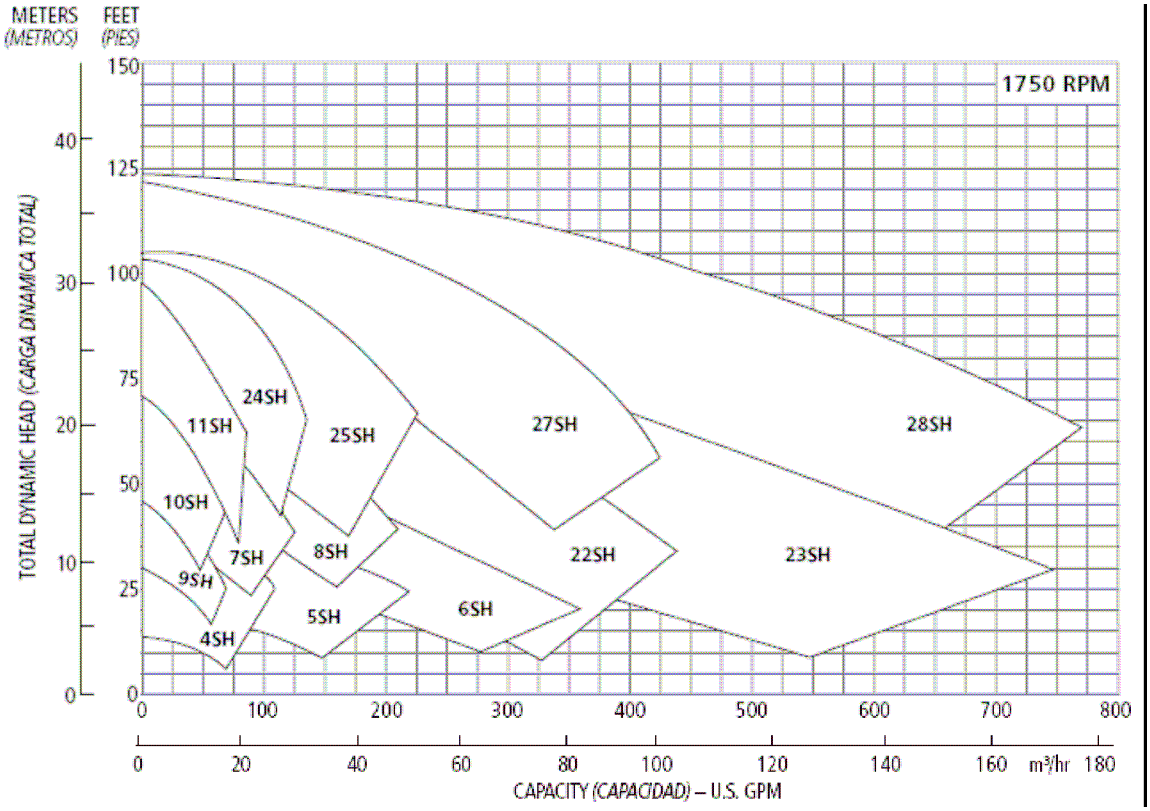

5SH 2 x 21/2 – 6 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 5HP 3600RPM 3 PH, ODP	5SH1J2G0
CENTRIFUGAL 5HP 3600RPM 1 PH, TEFC	5SH1J4G0
CENTRIFUGAL 5HP 3600RPM 3 PH, TEFC	5SH1J5H0
CENTRIFUGAL 71/2HP 3600RP 3 PH, ODP	5SH1K2F0
CENTRIFUGAL 71/2HP 3600RP 1 PH, TEFC	5SH1K4F0
CENTRIFUGAL 71/2HP 3600RP, 3 PH TEFC.	5SH1K5F0
CENTRIFUGAL 10HP 3600RPM 3 PH, ODP	5SH1L4D0
CENTRIFUGAL 10HP 3600RPM 3 PH, TEFC	5SH1L5D0
CENTRIFUGAL 15HP 3600RPM 3 PH, ODP	5SH1M2B0
CENTRIFUGAL 15HP 3600RPM 3 PH, TEFC.	5SH1M5B0
CENTRIFUGAL 3/4HP 1800RPM 1 PH, TEFC	5SH2D4G0
CENTRIFUGAL 1HP 1800RPM 1 PH, TEFC	5SH2E4F0
CENTRIFUGAL 1HP 1800RPM 3 PH, TEFC	5SH2E5F0
CENTRIFUGAL 11/2HP 180RPM, 1 PH, TEFC.	5SH2F4C0
CENTRIFUGAL 11/2HP 180RPM, 3 PH, TEFC	5SH2F5C0
CENTRIFUGAL 2HP 1800RPM, 1 PH, TEFC	5SH2G4B0
CENTRIFUGAL 2HP 1800RPM, 3 PH, TEFC	5SH2G5B0

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

6SH 21/2 x 3 – 6 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 10HP 3600RPM, 3 PH, ODP.	6SH1L2D0
CENTRIFUGAL 10HP 3600RPM, 1 PH, TEFC.	6SH1L4D0
CENTRIFUGAL 10HP 3600RPM, 3 PH, TEFC	6SH1L5D0
CENTRIFUGAL 15HP 3600RPM, 3 PH, ODP.	6SH1M2E0
CENTRIFUGAL 15HP 3600RPM, 3 PH, TEFC.	6SH1M5E0
CENTRIFUGAL 20HP 3600RPM, 3 PH, ODP.	6SH1N2C0
CENTRIFUGAL 20HP 3600RPM, 3 PH, TEFC.	6SH1N5C0
CENTRIFUGAL 25HP 3600RPM, 3 PH, ODP.	6SHH1P2A0
CENTRIFUGAL 1.5HP 1800RPM, 1 PH, TEFC.	6SH2F4G0
CENTRIFUGAL 1.5HP 1800RPM, 3 PH, TEFC	6SH2F5G0
CENTRIFUGAL 2HP 1800RPM, 3 PH, TEFC.	6SH2G5E0
CENTRIFUGAL 3HP 1800RPM, 1 PH, TEFC.	6SH2H4A0
CENTRIFUGAL 3HP 1800RPM, 3 PH, TEFC.	6SH2H5A0

8SH 2 x 21/2 – 8 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 10HP 3600RPM, 3 PH, ODP.	8SH1L2G0
CENTRIFUGAL 10HP 3600RPM, 1 PH, TEFC.	8SH1L4F0
CENTRIFUGAL 10HP 3600RPM, 3 PH, TEFC.	8SH1L5F0
CENTRIFUGAL 15HP 3600RPM, 3 PH, ODP	8SH1M2D0
CENTRIFUGAL 15HP 3600RPM, 3 PH, TEFC.	8SH1M5E0
CENTRIFUGAL 20HP 3600RPM, 3 PH, ODP.	8SH1N2B0
CENTRIFUGAL 20HP 3600RPM, 3 PH, TEFC.	8SH1N5B0
CENTRIFUGAL 25HP 3600RPM, 3 PH, ODP.	8SH1P2A0
CENTRIFUGAL 1.5HP 1800RPM, 1 PH, TEFC.	8SH2F4E0
CENTRIFUGAL 1.5HP 1800RPM, 3 PH, TEFC.	8SH2F5E0
CENTRIFUGAL 2HP 1800RPM, 1 PH, TEFC.	8SH2G4A0
CENTRIFUGAL 2HP 1800RPM, 3 PH, TEFC.	8SH2G5C0
CENTRIFUGAL 3HP 1800RPM, 1 PH, TEFC.	8SH2H4A0
CENTRIFUGAL 3HP 1800RPM, 3 PH, TEFC.	8SH2H5A0

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

FLANGED PUMPS

Design with technical benefits to meet the needs of users in a variety of water supply, circulation, and cooling applications. Model 3656 offers close coupled design for space saving and simplified maintenance.

- The model 3756 offers a bearing frame mounted design for flexibility of installation and drive arrangements.
- The model 3656 offers close coupled design for space saving and simplified maintenance.
- Back pull-out to reduce maintenance down time.
- Standard Type 21 mechanical seal for both reliability and available. Carbon/ceramic/BUNA standard with other faces and elastomers available
- 3656/3756 available in all iron, bronze fitted or all bronze construction for application versatility.
- Standard NEMA motor frame, JM or JP shaft extension, C-face mounting, single phase or three phase, 3500 or 1750 RPM. Open drip proof and totally enclosed fan cooled.
- Optional rigid carbon steel bedplate, sheet metal coupling guard and T.B. Woods spacer coupling for 3756 models.
- Replaceable wearing components include stainless steel shaft sleeve and casing and hub wear rings to maintain peak efficiency.
- Packed box sealing is also available as an option.
- Enclosed impeller design, dynamic balancing and renewal wear rings reduce losses affecting performance and pump life.
- Suction discharge pipe connections are NPT threaded, except 3 x 4 – 7, which has 125 LB. ANSI flat faced flanges.
- Rigid cast iron motor adapter provides support and registered fit maintain positive unit.
- Optional explosion proof or high efficiency motors available.

Applications: Booster service, Spraying systems, Irrigation, Water circulation, Liquid transfer, General purpose pumping

6BF 3 x 4 – 7 PUMPS (3656/3756 S-GROUP)

DESCRIPTION	PART NUMBER
CENTRIFUGAL 10HP 3600RPM, 3 PH, ODP.	6BF1L2C0*
CENTRIFUGAL 10HP 3600RPM, 1 PH, TEFC.	6BF1L4C0
CENTRIFUGAL 10HP 3600RPM, 3 PH, TEFC.	6BF1L5C0
CENTRIFUGAL 15HP 3600RPM, 3 PH, ODP.	6BF1M2B0
CENTRIFUGAL 15HP 3600RPM, 3 PH, TEFC.	6BF1M5B0
CENTRIFUGAL 1.5HP 1800RPM, 3 PH, ODP.	6BF2F2C0
CENTRIFUGAL 1.5HP 1800RPM, 1 PH, TEFC.	6BF2F4C0
CENTRIFUGAL 1.5HP 1800RPM, 3 PH, TEFC.	6BF2F5C0
CENTRIFUGAL 2HP 1800RPM, 3 PH, ODP.	6BF2G2B0
CENTRIFUGAL 2HP 1800RPM, 1 PH, TEFC.	6BF2G4B0
CENTRIFUGAL 2HP 1800RPM, 3 PH, TEFC.	6BF2G5B0
CENTRIFUGAL 3HP 1800RPM, 1 PH, TEFC.	6BF2H4A0
CENTRIFUGAL 3HP 1800RPM, 3 PH, TEFC.	6BF2H5A0

*** BF: Bronze Fitted**

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

3500 Coverage Curve, *Curva de alcance 3500*

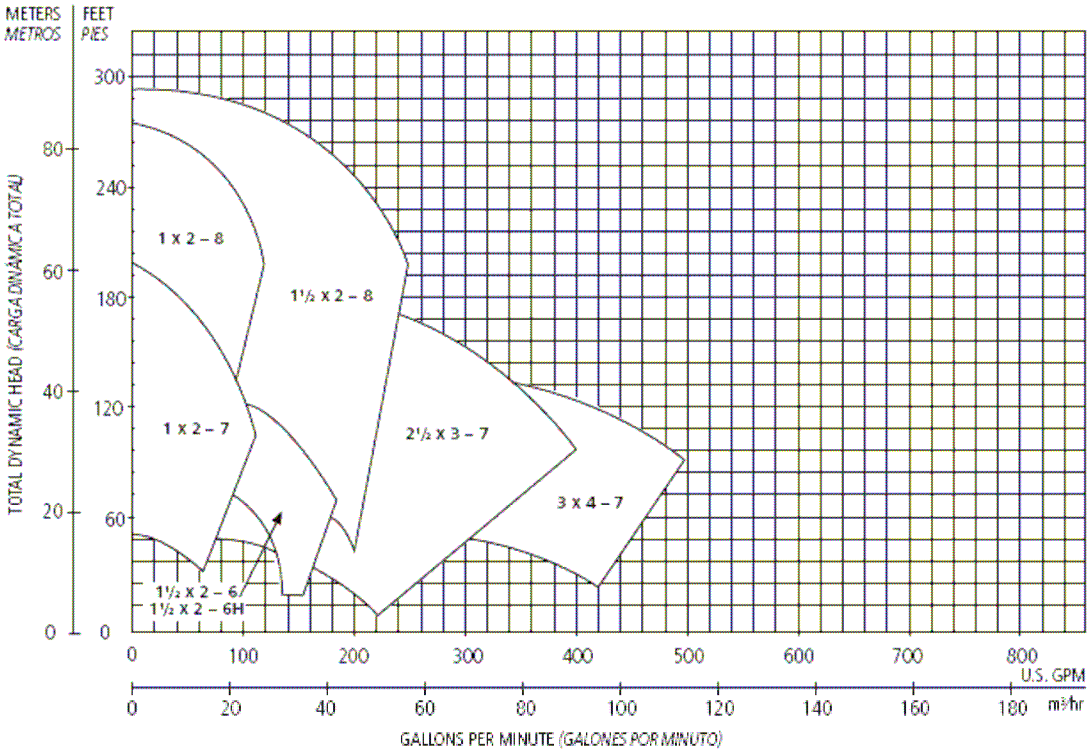

1750 Coverage Curve, *Curva de alcance 1750*

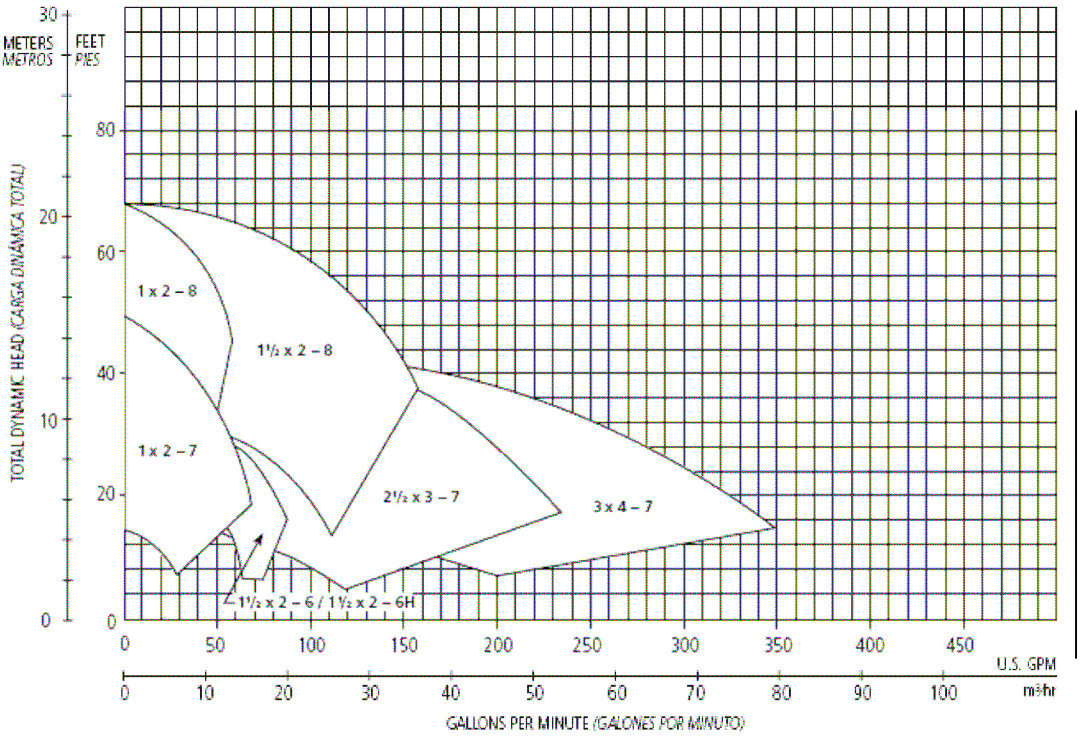

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com

www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

(3656/3756 M GROUP)

Performance Coverage
Campo de desempeño

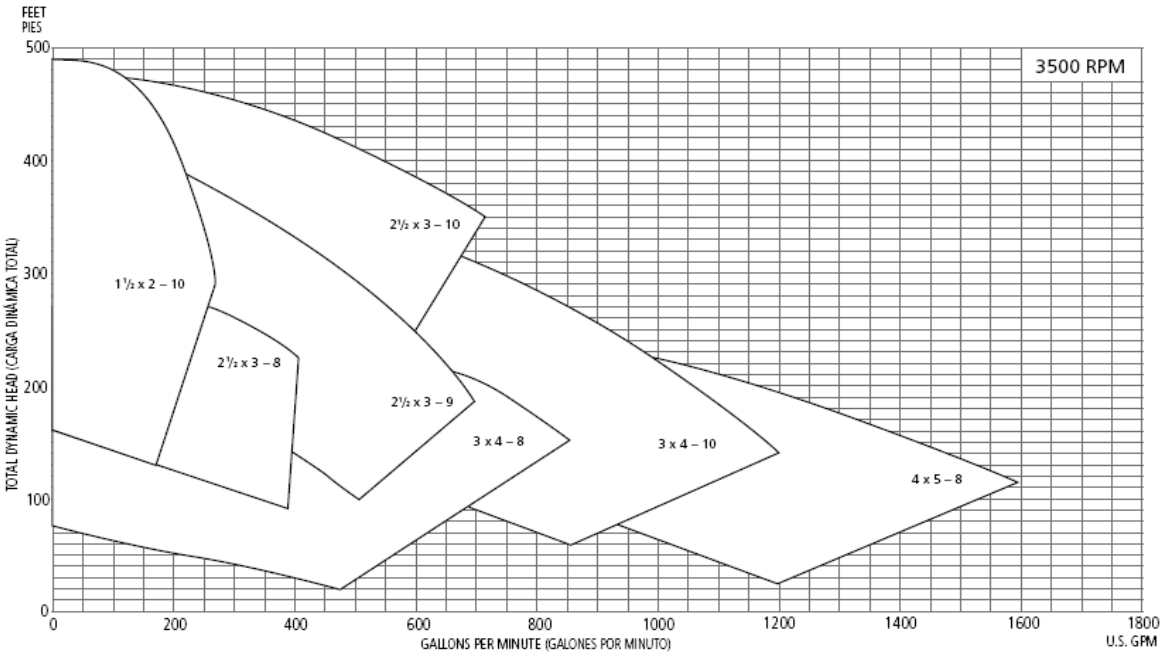

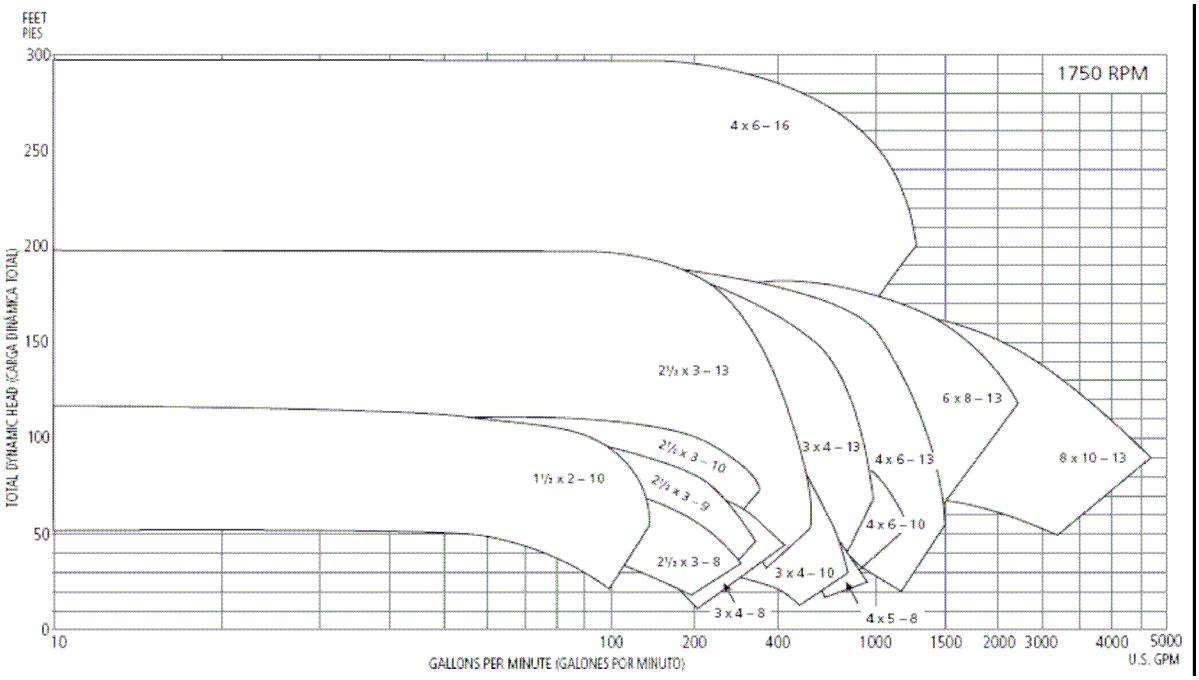

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

The 3556 and 3756 M-Group pumps from Gould's pumps have been designed with technical benefits to meet the needs of users in a variety of water supply, recirculation, and cooling applications.

- The model 3756 offers a bearing frame mounted design for flexibility of installation and drive arrangements.
- The model 3656 offers close coupled design for space saving and simplified maintenance.
- SAE drive 1 through 5 available on all M sizes.
- Back pull-out to reduce maintenance down time.
- Standard type 21 mechanical seal for both reliability and availability. Carbon/ceramic/BUNA standard, with other faces and elastomers available.
- Available in packed stuffing box design with Teflon ™ impregnated packing, split Teflon lantern ring, tapped flush connection and 2-piece investment cast interlocking gland, all standard.
- Available in all iron or bronze fitted construction for application versatility.
- Replacement wearing components include stainless steel shaft sleeve and casing and hub wear rings to maintain peak efficiency.
- Enclosed impeller design dynamic balancing and renewable wear rings reduce losses affecting performance and pump life.
- 125 Class ANSI flange suction/discharge connections and casing rotation for piping connection versatility.
- NPT threaded connections are supplied on 1 ½ x 2-10 and 2 ½ x3-8 models.
- Optional rigid carbon steel bedplate, sheet metal coupling guard and T.B. Woods spacer coupling for 3756 models.
- Standard NEMA motor frame, JM shaft extension (mechanical seal) JP shaft extension (packed box), Cface mounting, single phase or three phase, 3500 or 1750 RPM for 60 Hz, 2900 or 1450 RPM for 50 Hz. Open drip-proof and totally enclosed fan cooled.
- Optional explosion proof and high efficiency motors are available.

10BF 4 x 5 – 8 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 5HP 1800RPM, 3 PH, ODP.	10BF2J2G0
CENTRIFUGAL 5HP 1800RPM, 3 PH, TEFC.	10BF2J5G0
CENTRIFUGAL 7.5HP 1800RPM, 3 PH, ODP.	10BF2K2D0
CENTRIFUGAL 7.5HP 1800RPM, 3 PH, TEFC	10BF2K5D0

11BF 2 – 1/2 x 3 – 10 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 5HP 1800RPM, 3 PH, ODP.	11BF2J2G0
CENTRIFUGAL 5HP 1800RPM, 3 PH, TEFC.	11BF2J5G0
CENTRIFUGAL 7.5HP 1800RPM, 3 PH, ODP.	11BF2K2D0
CENTRIFUGAL 7.5HP 1800RPM, 3 PH, TEFC.	11BF2K5D0

12BF 3 x 4 – 10 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 7.5HP 1800RPM, 3 PH, ODP.	12BF2K2F0
CENTRIFUGAL 7.5HP 1800RPM, 3 PH, TEFC.	12BF2K5F0
CENTRIFUGAL 10HP 1800RPM, 3 PH, ODP.	12BF2L2D0
CENTRIFUGAL 10HP 1800RPM, 3 PH, TEFC.	12BF2L5D0

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

13BF 2 –1/2 x 3 – 13 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 2HP 1800RPM, 3 PH, ODP.	13BF2G2G0
CENTRIFUGAL 10HP 1800RPM, 3 PH, TEFC.	13BF2L2F0
CENTRIFUGAL 10HP 1800RPM, 3 PH, TEFC.	13BF2L5F0
CENTRIFUGAL 15HP 1800RPM, 3 PH, ODP.	13BF2M2D0
CENTRIFUGAL 15HP 1800RPM, 3 0PH, TEFC.	13BF2M5D0
CENTRIFUGAL 20HP 1800RPM, 3 PH, ODP.	13BF2N2B0
CENTRIFUGAL 20HP 1800RPM, 3 PH, TEFC.	13BF2N5B0

14BF 3 x 4 – 13 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 7.5HP 1800RPM, 3 PH, ODP.	14BF2K2M0
CENTRIFUGAL 7.5HP 1800RPM, 3 PH, TEFC.	14BF2K5M0
CENTRIFUGAL 10HP 1800RPM, 3 PH, ODP.	14BF2L2K0
CENTRIFUGAL 10HP 1800RPM, 3 PH, TEFC.	14BF2L5K0
CENTRIFUGAL 15HP 1800RPM, 3 PH, ODP.	14BF2M2H0
CENTRIFUGAL 15HP 1800RPM, 3 PH, TEFC.	14BF2M5H0
CENTRIFUGAL 20HP 1800RPM, 3 PH, ODP.	14BF2N2F0
CENTRIFUGAL 20HP 1800RPM, 3 PH, TEFC.	14BF2N5F0
CENTRIFUGAL 25HP 1800RPM, 3 PH, ODP.	14BF2P2D0
CENTRIFUGAL 25HP 1800RPM, 3 PH, TEFC.	14BF2P5D0

16BF 3 x 4 – 8 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 1HP 1800RPM, 3 PH, TEFC.	16BF2E5JO
CENTRIFUGAL 2HP 1800RPM, 3 PH, TEFC.	16BF2G5G0
CENTRIFUGAL 3HP 1800RPM, 3 PH, ODP.	16BF2H2F0
CENTRIFUGAL 3HP 1800RPM, 3 PH, TEFC.	16BF2H5F0
CENTRIFUGAL 5HP 1800RPM, 3 PH, ODP.	16BF2J2D0
CENTRIFUGAL 5HP 1800RPM, 3 PH, TEFC.	16BF2J5D0

17BF 4 x 6 – 10 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 15HP 1800RPM, 3 PH, ODP.	17BF2M2D0
CENTRIFUGAL 15HP 1800RPM, 3 PH, TEFC.	17BF2M5D0
CENTRIFUGAL 20HP 1800RPM, 3 PH, ODP.	17BF2N2B0

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

IN LINE PUMPS

Industry standard motor designed for vertical in-line operation.
radially split volute with equal suction and discharge flange sizes. Separate drilled and tapped openings for gauge, flush and drain connections.
Liberal inlet passageways and straightening vanes provide optimum suction performance and quiet operation.

DESCRIPTION	PART NUMBER

PLEASE CALL FOR MORE INFORMATION

MULTISTAGE PUMPS

SSV SERIES

The SSV pump is a non-self priming vertical multistage pump coupled to a standard motor. The liquid end, located between the upper cover and the pump casing, is held in place by tie rods. The pump casing is available with different configurations and connections types.

APPLICATIONS

WATER SUPPLY
- Transfer and distribution from water systems.
- Pressure boosting in apartment buildings and hotels.
- Packaged booster sets.

WATER TREATMENTS
- Filtration.
- Reverse Osmosis systems.
- Ultra filtration.

INDUSTRIAL/OEM
- Parts washing.
- Car wash.
- Paint Systems
- Process/Plant Water.

AGRICULTURE
- Irrigation systems.
- Green houses.
- Humidifiers.

HEATING, VENTILATING AND AIR CONDITIONING (HVAC)
- Boiler feed.
- Heat exchangers.
- Cooling towers and systems.
- Chillers.

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

SSV COVERAGE CURVE

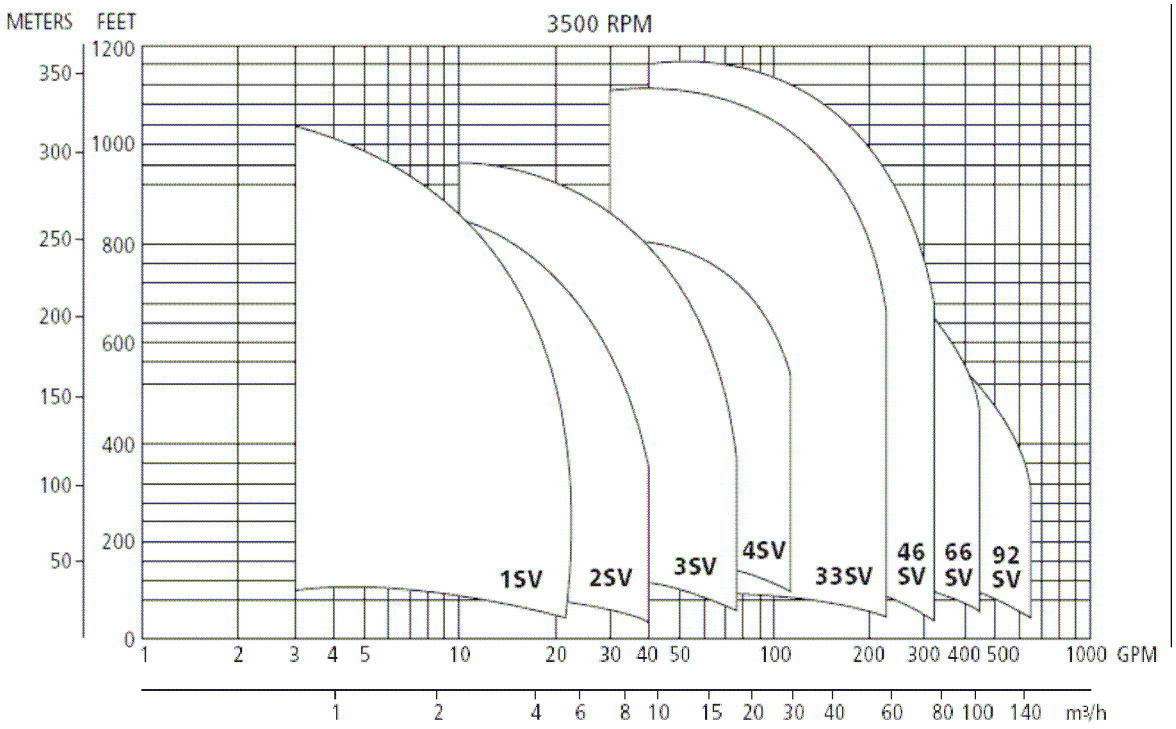

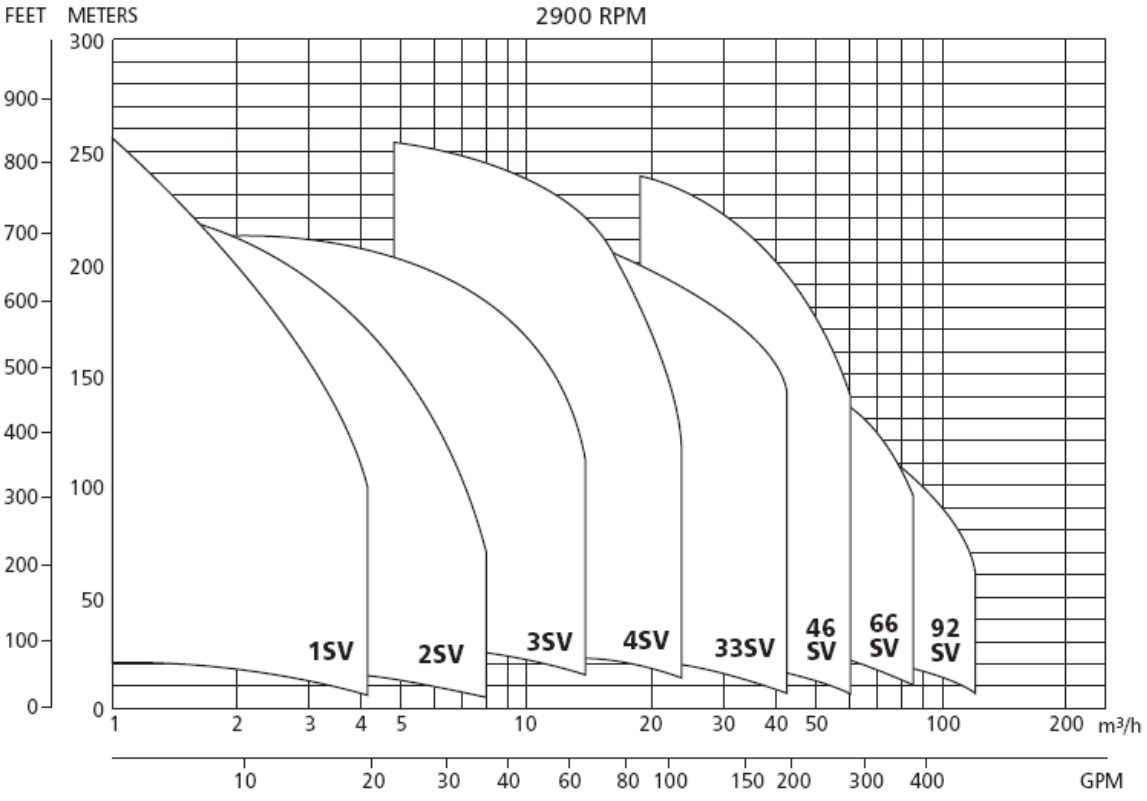

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

1SV PUMPS

DESCRIPTION	PART NUMBER
MULTI STAGE 2STG 1/2HP 1PH, 3600 RPM, TEFC.	1SVB1C4B0
MULTI STAGE 2STG 1/2HP 3PH, 3600 RPM, TEFC.	1SVB1C5B0
MULTI STAGE 3STG 3/4HP 1PH, 3600 RPM, TEFC.	1SVB1D4C0
MULTI STAGE 3STG 3/4HP 3PH, 3600 RPM, TEFC.	1SVB1D5C0
MULTI STAGE 4STG 1HP 1PH, 3600 RPM, TEFC.	1SVB1E4D0
MULTI STAGE 4STG 1HP 3PH, 3600 RPM, TEFC.	1SVB1E5D0
MULTI STAGE 5STG 1.5HP 1PH, 3600 RPM, TEFC.	1SVB1F4E0
MULTI STAGE 5STG 1.5HP 3PH, 3600 RPM, TEFC.	1SVB1F5E0
MULTI STAGE 7STG 2HP 3PH, 3600 RPM, ODP.	1SVB1G2GO
MULTI STAGE 6STG 2HP 1PH, 3600 RPM, TEFC.	1SVB1G4F0
MULTI STAGE 7STG 2HP 1PH, 3600 RPM, TEFC.	1SVB1G4G0
MULTI STAGE 6STG 2HP 3PH, 3600 RPM, TEFC.	1SVB1G5F0
MULTI STAGE 8STG 3HP 1PH, 3600 RPM, TEFC.	1SVB1H4H0
MULTI STAGE 9STG 3HP 1PH, 3600 RPM, TEFC.	1SVB1H4J0
MULTI STAGE 11STG 3HP 1PH, 3600 RPM, TEFC.	1SVB1H4L0
MULTI STAGE 8STG 3HP 3PH, 3600 RPM, TEFC.	1SVB1H5H
MULTI STAGE 9STG 3HP 3PH, 3600 RPM, TEFC.	1SVB1H5J0
MULTI STAGE 11STG 3HP 3PH, 3600 RPM, TEFC.	1SVB1H5L0

2SV PUMPS

DESCRIPTION	PART NUMBER
MULTI STAGE 2STG 3/4HP 1PH, 3600 RPM, TEFC.	2SVB1D4B0
MULTI STAGE 2STG 3/4HP 3PH, 3600 RPM, TEFC.	2SVB1D5B0
MULTI STAGE 3STG 1HP 1PH, 3600 RPM, TEFC.	2SVB1E4C0
MULTI STAGE 3STG 1HP 3PH, 3600 RPM, TEFC.	2SVB1E5C0
MULTI STAGE 4STG 1.5HP 1PH, 3600 RPM, TEFC.	2SVB1F4D0
MULTI STAGE 4STG 1.5HP 3PH, 3600 RPM, TEFC.	2SVB1F5D0
MULTI STAGE 5STG 2HP 1PH, 3600 RPM, TEFC.	2SVB1G4E0
MULTI STAGE 6STG 2HP 1PH, 3600 RPM, TEFC.	2SVB1G4F0
MULTI STAGE 5STG 2HP 3PH, 3600 RPM, TEFC.	2SVB1G5E0
MULTI STAGE 6STG 2HP 3PH, 3600 RPM, TEFC.	2SVB1G5F0
MULTI STAGE 7STG 3HP 1PH, 3600 RPM, TEFC.	2SVB1H4G0
MULTI STAGE 8STG 3HP 1PH, 3600 RPM, TEFC.	2SVB1H4H0
MULTI STAGE 9STG 3HP 1PH, 3600 RPM, TEFC.	2SVB1H4J0
MULTI STAGE 7STG 3HP 3PH, 3600 RPM, TEFC.	2SVB1H5G0
MULTI STAGE 8STG 3HP 3PH, 3600 RPM, TEFC.	2SVB1H5H0
MULTI STAGE 9STG 3HP 3PH, 3600 RPM, TEFC.	2SVB1H5J0

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

3SV PUMPS

DESCRIPTION	PART NUMBER
MULTI STAGE 2STG 2HP 1PH, 3600 RPM, TEFC.	3SVB1G4B0
MULTI STAGE 2STG 2HP 3PH, 3600 RPM, TEFC.	3SVB1G5B0
MULTI STAGE 3STG 3HP 1PH, 3600 RPM, TEFC.	3SVB1H4C0
MULTI STAGE 3STG 3HP 3PH, 3600 RPM, TEFC.	3SVB1H5C0
MULTI STAGE 4STG 5HP 1PH, 3600 RPM, TEFC.	3SVB1J4D0
MULTI STAGE 5STG 5HP 1PH, 3600 RPM, TEFC.	3SVB1J4E0
MULTI STAGE 4STG 5HP 3PH, 3600 RPM, TEFC.	3SVB1J5D0
MULTI STAGE 5STG 5HP 3PH, 3600 RPM, TEFC.	3SVB1J5E0
MULTI STAGE 6STG 7.5HP 3PH, 3600 RPM, TEFC.	3SVB1K5F0
MULTI STAGE 7STG 7.5HP 3PH, 3600 RPM, TEFC.	3SVB1K5G0
MULTI STAGE 8STG 7.5HP 3PH, 3600 RPM, TEFC.	3SVB1K5H0

4SV PUMPS

DESCRIPTION	PART NUMBER
MULTI STAGE 2STG 5HP 1PH, 3600 RPM, TEFC.	4SVB1J4B0
MULTI STAGE 2STG 5HP 3PH, 3600 RPM, TEFC.	4SVB1J5B0
MULTI STAGE 3STG 7.5HP 3PH, 3600 RPM, TEFC.	4SVB1K5C0
MULTI STAGE 4STG 7.5HP 3PH, 3600 RPM, TEFC.	4SVB1K5D0
MULTI STAGE 5STG 10HP 3PH, 3600 RPM, TEFC.	4SVB1L5E0

SPLIT-CASE PUMPS

Paco pumps. Sizes-up to 12 inches suction and discharge

DESCRIPTION	PART NUMBER

****PLEASE CALL FOR MORE INFORMATION****

THREADED PUMPS

Suction and discharge pipe connections are NPT threaded
Rigid cast iron motor adapter provides support and registered fits maintain positive unit alignment.
Standard NEMA motor frame, JM or JP shaft extension, C-FACE mounting, single phase or three phase, 3500 or 1750 rpm. Open drip proof and totally enclosed fan cooled.

3BF 1 ½ x 2 –6 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 3HP 3600RPM, 3 PH, ODP.	3BF1H2C0
CENTRIFUGAL 3HP 3600RPM, 1 PH, TEFC.	3BF1H4C0
CENTRIFUGAL 3HP 3600RPM, 3PH, TEFC.	3BF1H5C0
CENTRIFUGAL 5HP 3600RPM, 3 PH, ODP.	3BF1J2A0

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
CENTRIFUGAL 5HP 3600RPM, 1 PH, TEFC.	3BF1J4B0
CENTRIFUGAL 5HP 3600RPM, 3 PH, TEFC.	3BF1J5A0

4BF 2 ½ x 3- 7 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 5 HP 3600RPM, 3 PH, ODP.	4BF1J2H0
CENTRIFUGAL 5 HP 3600RPM, 1 PH, TEFC.	4BF1J4J0
CENTRIFUGAL 5 HP 3600RPM, 3 PH, TEFC.	4BF1J5H0
CENTRIFUGAL 7.5 HP 3600RPM, 3 PH, ODP.	4BF1K2F0
CENTRIFUGAL 7.5 HP 3600RPM, 1 PH, TEFC.	4BF1K4F0
CENTRIFUGAL 7.5 HP 3600RPM, 3 PH, TEFC.	4BF1K5F0
CENTRIFUGAL 10 HP 3600RPM, 3 PH, ODP.	4BF1L2D0
CENTRIFUGAL 10 HP 3600RPM, 1 PH, TEFC.	4BF1L4D0
CENTRIFUGAL 10 HP 3600RPM, 3 PH, TEFC.	4BF1L5D0
CENTRIFUGAL 15 HP 3600RPM, 3 PH, ODP.	4BF1M2B0
CENTRIFUGAL 15 HP 3600RPM, 3 PH, TEFC.	4BF1M5C0
CENTRIFUGAL 20 HP 3600RPM, 3 PH, ODP.	4BF1N2A0
CENTRIFUGAL 20 HP 3600RPM, 3 PH, TEFC.	4BF1N5A0
CENTRIFUGAL 3/4 HP 1800RPM, 3 PH, ODP.	4BF2D2K0
CENTRIFUGAL 3/4 HP 1800RPM, 1 PH, TEFC.	4BF2D4K0
CENTRIFUGAL 3/4 HP 1800RPM, 3 PH, TEFC.	4BF2D5K0
CENTRIFUGAL 1 HP 1800RPM, 3 PH, ODP.	4BF2E2H0
CENTRIFUGAL 1 HP 1800RPM, 1 PH, TEFC.	4BF2E4H0
CENTRIFUGAL 1 HP 1800RPM, 3 PH, TEFC.	4BF2E5H0
CENTRIFUGAL 1.5 HP 1800RPM, 3 PH, ODP.	4BF2F2E0
CENTRIFUGAL 1.5 HP 1800RPM, 1 PH, TEFC.	4BF2F4E0
CENTRIFUGAL 1.5 HP 1800RPM, 3 PH TEFC.	4BF2F25E0
CENTRIFUGAL 2 HP 1800RPM, 3 PH, ODP.	4BF2G2C0
CENTRIFUGAL 2 HP 1800RPM, 1 PH, TEFC.	4BF2G4C0
CENTRIFUGAL 2 HP 1800RPM, 3 PH, TEFC.	4BF2G5C0

5BF 1 ½ x 2 – 8 PUMP

DESCRIPTION	PART NUMBER
CENTRIFUGAL 7.5 HP 3600RPM, 3 PH, ODP.	5BF1K2H0
CENTRIFUGAL 7.5 HP 3600RPM, 1 PH, TEFC.	5BF1K4H0
CENTRIFUGAL 7.5 HP 3600RPM, 3 PH, TEFC.	5BF1K5H0
CENTRIFUGAL 10 HP 3600RPM, 3 PH, ODP.	5BF1L2C0
CENTRIFUGAL 10 HP 3600RPM, 1 PH, TEFC.	5BF1L4C0
CENTRIFUGAL 10 HP 3600RPM, 3 PH, TEFC.	5BF1L5C0
CENTRIFUGAL 15 HP 3600RPM, 3 PH, ODP.	5BF1M2B0
CENTRIFUGAL 15 HP 3600RPM, 3 PH, TEFC.	5BF1M5F0
CENTRIFUGAL 20 HP 3600RPM, 3 PH, ODP.	5BF1N2A0
CENTRIFUGAL 20 HP 3600RPM, 3 PH, TEFC.	5BF1N5A0

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

7BF 2 ½ x 3 – 8 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 15HP 3600RPM, 3 PH, ODP.	7BF1M2F0
CENTRIFUGAL 15HP 3600RPM, 3 PH, TEFC.	7BF1M5F0
CENTRIFUGAL 20HP 3600RPM, 3 PH, ODP.	7BF1N2D0
CENTRIFUGAL 20HP 3600RPM, 3 PH, TEFC.	7BF1N5D0
CENTRIFUGAL 25HP 3600RPM, 3 PH, ODP.	7BF1P2B0
CENTRIFUGAL 25HP 3600RPM, 3 PH, TEFC.	7BF1P5B0
CENTRIFUGAL 2HP 1800RPM, 3 PH, ODP.	7BF2G2F0
CENTRIFUGAL 2HP 1800RPM, 1 PH, TEFC.	7BF2G4F0
CENTRIFUGAL 2HP 1800RPM, 3 PH, TEFC.	7BF2G5F0
CENTRIFUGAL 3HP 1800RPM, 3 PH, ODP.	7BF2H2C0
CENTRIFUGAL 3HP 1800RPM, 1 PH, TEFC.	7BF2H4C0
CENTRIFUGAL 3HP 1800RPM, 3 PH, TEFC.	7BF2H5C0

8BF 1 ½ x 2 –10 PUMPS

DESCRIPTION	PART NUMBER
CENTRIFUGAL 15HP 3600RPM, 3 PH, ODP.	8BF1M2F0
CENTRIFUGAL 15HP 3600RPM, 3 PH, TEFC.	8BF1M5F0
CENTRIFUGAL 20HP 3600RPM, 3 PH, ODP.	8BF1N2D0
CENTRIFUGAL 20HP 3600RPM, 3 PH, TEFC.	8BF1N5D0
CENTRIFUGAL 25HP 3600RPM, 3 PH, ODP.	8BF1P2C0
CENTRIFUGAL 25HP 3600RPM, 3 PH, TEFC.	8BF1P5C0
CENTRIFUGAL 2HP 1800RPM, 3 PH, ODP.	8BF2G2F0
CENTRIFUGAL 2HP 1800RPM, 3 PH, TEFC.	8BF2G4F0
CENTRIFUGAL 2HP 1800RPM, 3 PH, TEFC.	8BF2G5F0
CENTRIFUGAL 3HP 1800RPM, 3 PH, ODP.	8BF2H2D0
CENTRIFUGAL 3HP 1800RPM, 1 PH, TEFC.	8BF2H4D0
CENTRIFUGAL 3HP 1800RPM, 3 PH, TEFC.	8BF2H5D0

GASOLINE/DIESEL

HONDA
GENERATORS & PUMPS

Lightweight, self-priming gas powered water pump with frame. 2 and 3 suction and discharge. Cast iron impeller and volute are super strong and wear resistant.

DESCRIPTION	PART NUMBER
HONDA WATER PUMP 5 HP 3" GC160 4 CYCLE.	10617
NORTH STAR PUMP 5.5 HP, HONDA ENGINE 2x2	10625
WATER PUMP 1" W/MITS, TLE20PD ENGINE.	10632

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
HONDA 2" SEMITRASH PUMP 4 HP, Gx120 ENGINE	109160
HONDA 3" SEMITRASH PUMP 5.5 HP Gx160	109170
HONDA 3" TRASH PUMP 8 HP Gx240 ENGINE	106130

IN-LINE CIRCULATOR

Armstrong

A hydronic circulator that conserves energy and eliminates maintenance. ARMSTRONG'S ASTRO CIRCULATOR is intended for circulating water or ethylene glycol solutions in closed hydronic or solar heating systems. Efficient/quiet operation universal flange to flange dimension cast iron or all bronze construction UL and CSA listed

DESCRIPTION	PART NUMBER
CIRCULATOR PUMP ASTRO-30BF, 15 GPM, 1PH, 115 VOLT.	110123-005
CIRCULATOR PUMPASTRO-30B	110123-006
CIRCULATOR PUMP ASTRO-50, 20 GPM, 1PH, 115 VOLT.	110123-007
CIRCULATOR PUMP ASTRO-50B	110123-008
CIRCULATOR PUMP H-32AB	174034-143
CIRCULATOR PUMP H-32BF, 1/6 HP, 1 PH, 115 VOLT	174034-013
CIRCULATOR PUMP H-41 AB 1/6 HP 1 PH, 115 VOLT.	174035-143
CIRCULATOR PUMP H-41BF	106284-132
CIRCULATOR PUMP H-51BF-S 1/4 HP 1PH, 115 VOLT.	116431-132
CIRCULATOR PUMP H-52BF-S 1/3 HP 1PH, 115 VOLT.	116435-132
CIRCULATOR PUMP H-53BF-S 1/2 HP 1 PH, 115 VOLT.	116439-132
CIRCULATOR PUMP H-54BF-S 3/4 HP 1 PH, 115 VOLT.	116451-132
CIRCULATOR PUMP S-25BF 1/12 HP, 1 PH, 115 VOLT.	174031-013
CIRCULATOR PUMP S-25AB 1/6 HP, 1 PH, 115 VOLT.	174031-043
CIRCULATOR PUMP S-35AB	174033-043
CIRCULATOR PUMP S-35BF 1/6 HP, 1 PH, 115 VOLT.	174033-013
CIRCULATOR PUMP S-45AB 1/4 HP, 1 PH, 115 VOLT.	174036-143
CIRCULATOR PUMP S-45BF 1/4HP 1PHASE	174036-113
CIRCULATOR PUMP S-46AB 1/3 HP, 1 PH, 115 VOLT.	174037-143
CIRCULATOR PUMP S-46BF	174037-113

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

IRRIGATION

ACCESSORIES

We stock a wide variety of accessories for all irrigation and plumbing systems.

CANAL LAKE SCREEN

DESCRIPTION	PART NUMBER
CANAL LAKE SCREEN 4"	

JET PUMPS

GOULDS

JS MODEL: Design has an integral **Shallow well** adapter built into the casing, which eliminates the need for a separate **shallow well** adapter, **Protected Mechanical Seal**, available at 1/2, 3/4, 1 and 1 1/2 HP

DESCRIPTION	PART NUMBER
JET PUMP 1/2 HP 115/230V; 1 PH; 20-50 PSI; Max. Shut Off: 63 PSI	J5S
JET PUMP 3/4 HP 115/230V; 1PH; 30-60 PSI; Max. Shut Off: 70 PSI	J7S
JET PUMP 1 HP 115/230V; 1PH; 30-60 PSI; Max. Shut Off: 74 PSI	J10S
JET PUMP 1 ½" HP 115/230V; 1PH; 30-60 PSI; Max. Shut Off: 80 PSI	J15S

PIPE CONECTIONS	
Suction	Discharge
1 1/4"	1″

JRS MODEL: Design has an integral **Shallow well** adapter built into the casing, which eliminates the need for a separate **shallow well** adapter, available 1/2, 3/4 and 1 HP

DESCRIPTION	PART NUMBER
JET PUMP 1/2 HP 115/230V; 1PH; 20-50 PSI; Max. Shut Off: 64 PSI	JRS5
JET PUMP 3/4 HP 115/230V; 1PH; 30-50 PSI; Max. Shut Off: 69 PSI	JRS7
JET PUMP 1 HP 115/230V; 1PH; 30-60 PSI; Max. Shut Off: 72 PSI	JRS10

PIPE CONECTIONS	
Suction	Discharge
1 1/4"	1″

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

HSJ MODEL: Multi-Stage Convertible Jet Pumps, specifically design to deliver high capacities at greater pressures, Available at 3/4, 1, 1 1/2, 2 HP.

DESCRIPTION	PART NUMBER
JET PUMP 1 HP 115/230V; 1 PH; 2 STAGES; 30-60 PSI; Max. Shut Off: 79 PSI	HSJ10N
JET PUMP 1 ½" HP 115/230V 1PH; 3 STAGES; 30-80 PSI; Max. Shut Off: 104 PSI	HSJ15N
JET PUMP 2 HP 230V only; 1 PH; 3 STAGES; 30-80 PSI; Max Shut Off: 105 PSI	HSJ20N

PIPE TAPPING SIZES		
Suction	Drive	Discharge
1 1/4"	1"	1"

Additional Accessories Required:

- Shallow well package: Includes adapter, nozzle, venturi, bolts, gasket and plugs
  See SUCTION ADAPTORS early in this Chapter

- Packer System: Well casing adapter **AWJ2** (2") and turned coupling **64655** or **AWCJ3** (3")

■ **AWJ2 – 2" Packer Adapter:** Well casing adapter for series J+, JRD and HSJ jet pumps.

■ **AWCJ3 – 3" Packer Adapter:** Well casing adapter for series J+ and HSJ.

- For Deep Well Systems: A pressure control valve such as an **AV22KIT** or **AV22 plus** a JDW tubing kit.

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

LB MODEL (Booster Pumps): Provides an economical alternative for small booster sets with flow requirements up to 18 GPM and heads up to 190 feet**, Stainless Steel construction**. Applications include R/O systems, chiller and potable water boosting.

DESCRIPTION	PART NUMBER
JET PUMP 1/2 HP 115/230V 1 PH; 75 PSI	LB0512TE
JET PUMP 3/4 HP 115/230V 1 PH; 75 PSI	LB0712TE
JET PUMP 1 HP 115/230V 1 PH; 75 PSI	LB1012TE

PIPE CONECTIONS	
Suction	Discharge
1 1/4"	1″

STA-RITE

FN Series: Provides strong performance with good pressure **for wells to 25 ft. deep**. Cast iron body and base specially treated for corrosion resistance 1/2 HP & 3/4 HP.

DESCRIPTION	PART NUMBER
JET PUMP 1/2 HP 115/230V 1 PH; CAST IRON; 20-50 PSI	FNC-L
JET PUMP 3/4 HP 115/230V 1 PH; CAST IRON; 30-50 PSI	FND-L

PIPE CONECTIONS	
Suction	Discharge
1 1/4"	1″

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

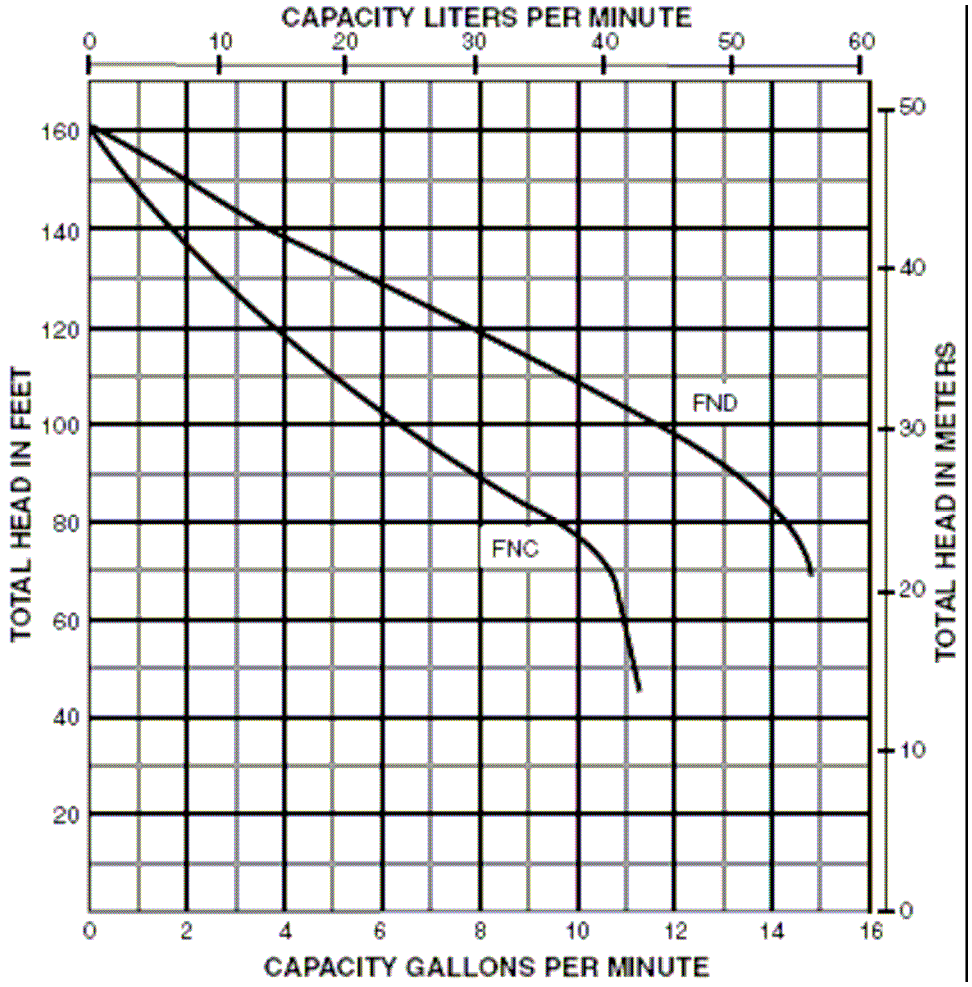

ProJet™ SN Series: Provides excellent performance with strong pressure **for wells to 25 ft. deep**.



DESCRIPTION	PART NUMBER
JET PUMP 1/2 HP 115/230V; 1 PH; CAST IRON	SNC-L
JET PUMP 3/4 HP 115/230V; 1PH; CAST IRON	SND-L
JET PUMP 1 HP 115/230V; 1 PH; CAST IRON	SNE-L
JET PUMP 1 ½" HP 115/230V; 1PH; CAST IRON	SNF-L

PIPE CONECTIONS	
Suction	Discharge
1 1/4"	1"

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

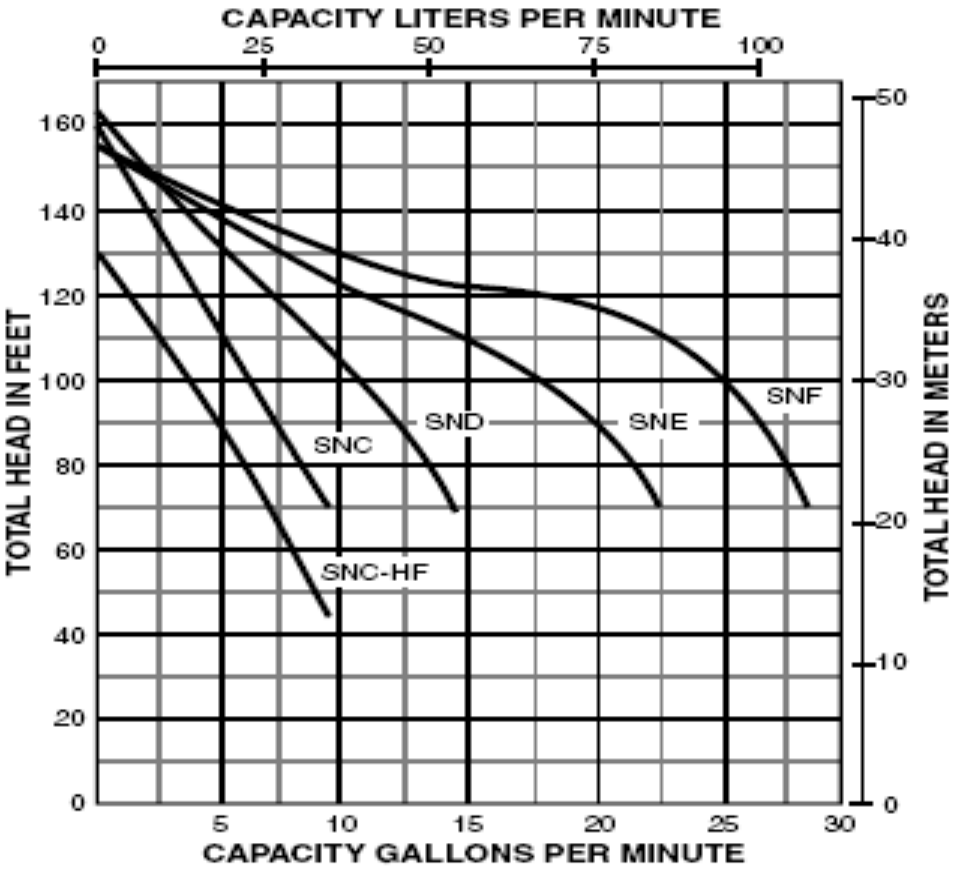

PN Series Shallow Well Jet Pumps are corrosion and abrasion-resistant and are ideal for wells with pumping levels of 25' or less. Capacities to 18 GPM, supplied with the industry standard 30-50 pressure switch setting.

DESCRIPTION	PART NUMBER
JET PUMP 1/2 HP 115/230V; 1 PH; FIBERGLASS; Shut off: 69 PSI	PNC
JET PUMP 3/4 HP 115/230V; 1 PH; FIBERGLASS; Shut off: 70 PSI	PND

PIPE CONECTIONS	
Suction	Discharge
1 1/4"	3/4"

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

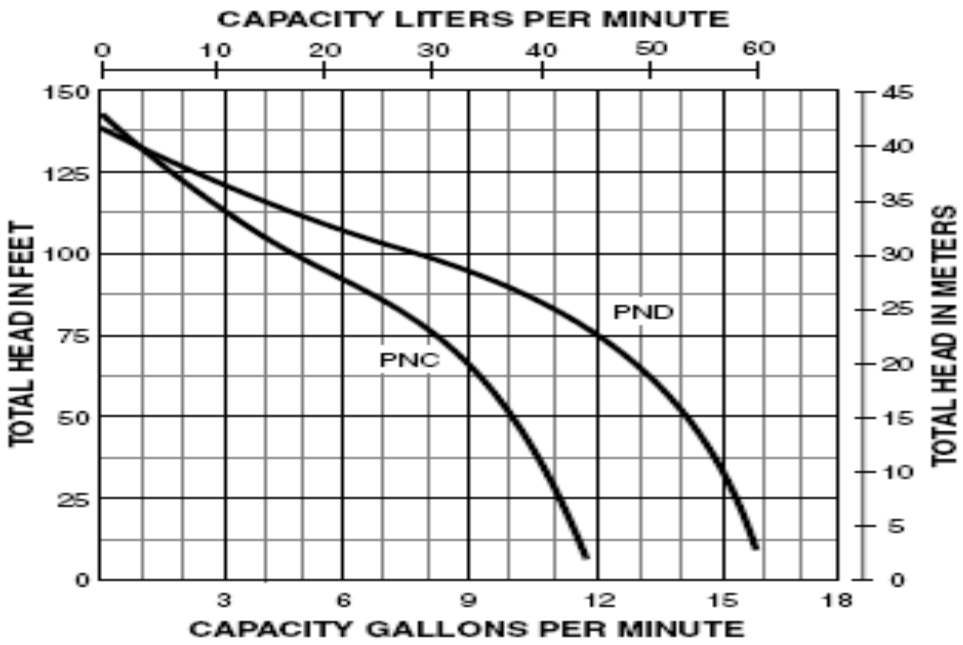

HMS Series pumps are available in 3/4, 1 and 1-1/2 HP models for a wide range of applications **in deep or shallow well** with heads to 167 feet capacities to 62 GPM.

DESCRIPTION	PART NUMBER
JET PUMP 1 HP 115/230V; 1 PH; CAST IRON; HORIZONTAL. 2 STAGES	HMSE
JET PUMP 1-1/2 HP 115/230V 1PH; CAST IRON; HORIZONTAL. 2 STAGES	HMSF-1FL

PIPE TAPPING SIZES		
Suction	Drive	Discharge
1 1/4"	1″	1″

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

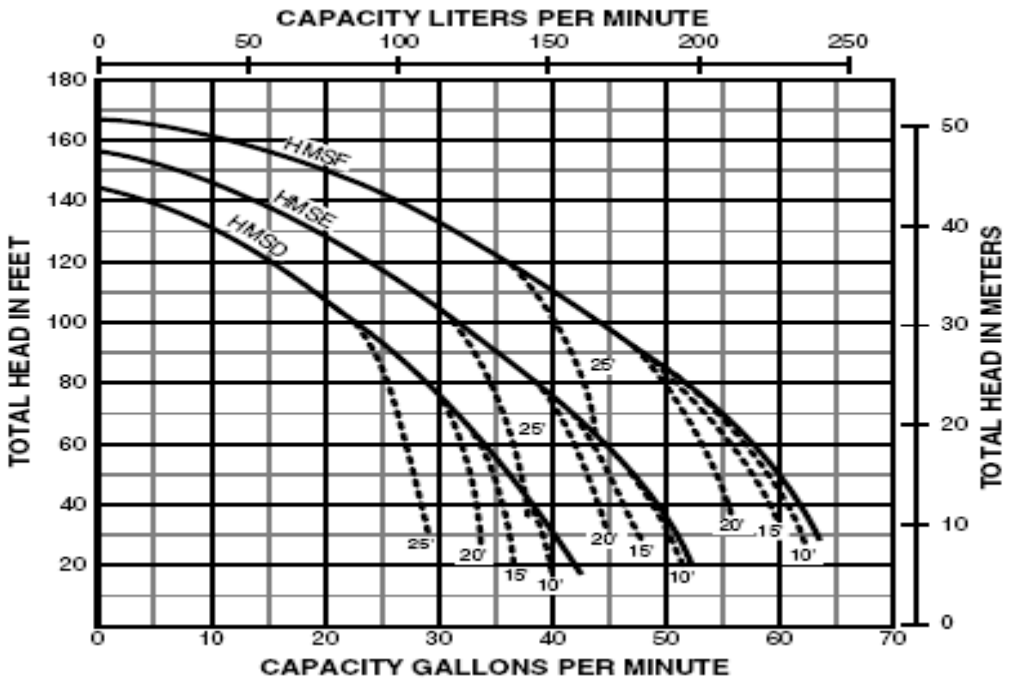

PEDROLLO ... the spring of life

JCR Model (Shallow Well) pumps are available 1/2 and 1 HP, recommended for pumping clean water and liquids that are chemically non-aggressive to the materials from which the pump is made. JCR Self-priming pumps are designed for suction lifts and can be positioned above the water source, including applications with air entrained in the water. Due to their reliability and low maintenance, they are recommended for domestic use, including water distribution, garden irrigation, etc.

FLOW RATE: 21 GPM; HEAD UP TO 236 ft; BODY: Stainless Steel AISI 304, TEFC motor.

DESCRIPTION	PART NUMBER
JET PUMP FOR SHALLOW WELL 1/2 HP 115V 1PH 60HZ STAINLESS. STEEL	JCR05A16P
JET PUMP FOR SHALLOW WELL 1/2 HP 230V 1PH 60HZ STAINLESS. STEEL	JCR05C16P
JET PUMP FOR SHALLOW WELL 1HP 115V 1PH 60HZ STAINLESS. STEEL	JCR10A16P
JET PUMP FOR SHALLOW WELL 1HP 230V 1PH 60HZ STAINLESS. STEEL	JCR10C16P

PIPE CONECTIONS		
	Suction	Discharge
1/2 HP	1"	1"
1 HP	1 1/4"	1"

JSW Model (Shallow Well) pumps are available 1/2, 3/4, 1 and 1 1/2HP, recommended for pumping clean water and liquids that are chemically non-aggressive to the materials from which the pump is made. JSW Self-priming pumps are designed for suction lifts and can be positioned above the water source, including applications with air entrained in the water. Due to their reliability and low maintenance, they are recommended for domestic use, including water distribution, garden irrigation, etc.

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

FLOW RATE: 13 GPM; HEAD UP TO 154 ft; BODY: Cast Iron, TEFC motor.

DESCRIPTION	PART NUMBER
JET PUMP FOR SHALLOW WELL 1/2 HP 115V 1PH 60HZ Cast Iron	JSWX05A16P
JET PUMP FOR SHALLOW WELL 1/2 HP 230V 1PH 60HZ Cast Iron	JSWX05C16P
JET PUMP FOR SHALLOW WELL 1HP 115V 1PH 60HZ Cast Iron	JSWX10A16P
JET PUMP FOR SHALLOW WELL 1HP 230V 1PH 60HZ Cast Iron	JSWX10C16P
JET PUMP FOR SHALLOW WELL 1 1/2HP 230V 1PH 60HZ Cast Iron	JSWQ15C16S

PIPE CONECTIONS		
	Suction	Discharge
1/2 and 1HP	1"	1"
1 1/2 HP	1 1/4″	1″

PLURIJET Model (Multistage) pumps are available 0.4, 1/2, 1 and 1 1/2HP, recommended for pumping clean water and liquids that are chemically non-aggressive to the materials from which the pump is made. PLURIJET self-priming pumps are designed for lifting water, even in cases with entrained air. Their quiet running, reliability and low power consumption makes them particularly suitable for domestic and civil use, including pressurization and distribution of water, irrigation and rainwater recovery systems.

FLOW RATE: 52 GPM; HEAD UP TO 394 ft; BODY: Cast Iron and Stainless Steel AISI 304, TEFC motor.

DESCRIPTION	PART NUMBER
MULTISTAGE JET PUMP 1HP 230V 1PH 60HZ, Cast Iron & Stainless S.	PJ2010C16S
MULTISTAGE JET PUMP 11/2HP 230V 1PH 60HZ, Cast Iron & Stainless S.	PJ3015C16S

PIPE CONECTIONS		
	Suction	Discharge
0.4 and 1/2HP	1"	1"
1 and 1 1/2HP	1 1/4″	1″

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

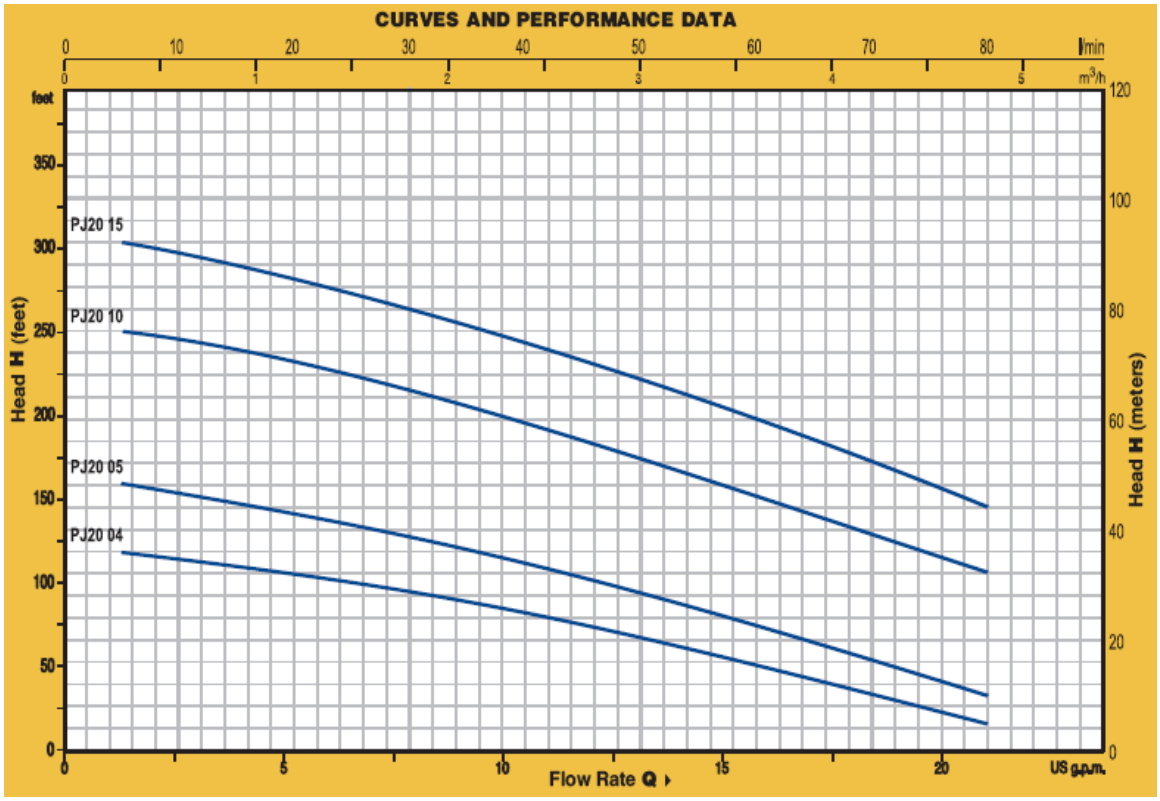

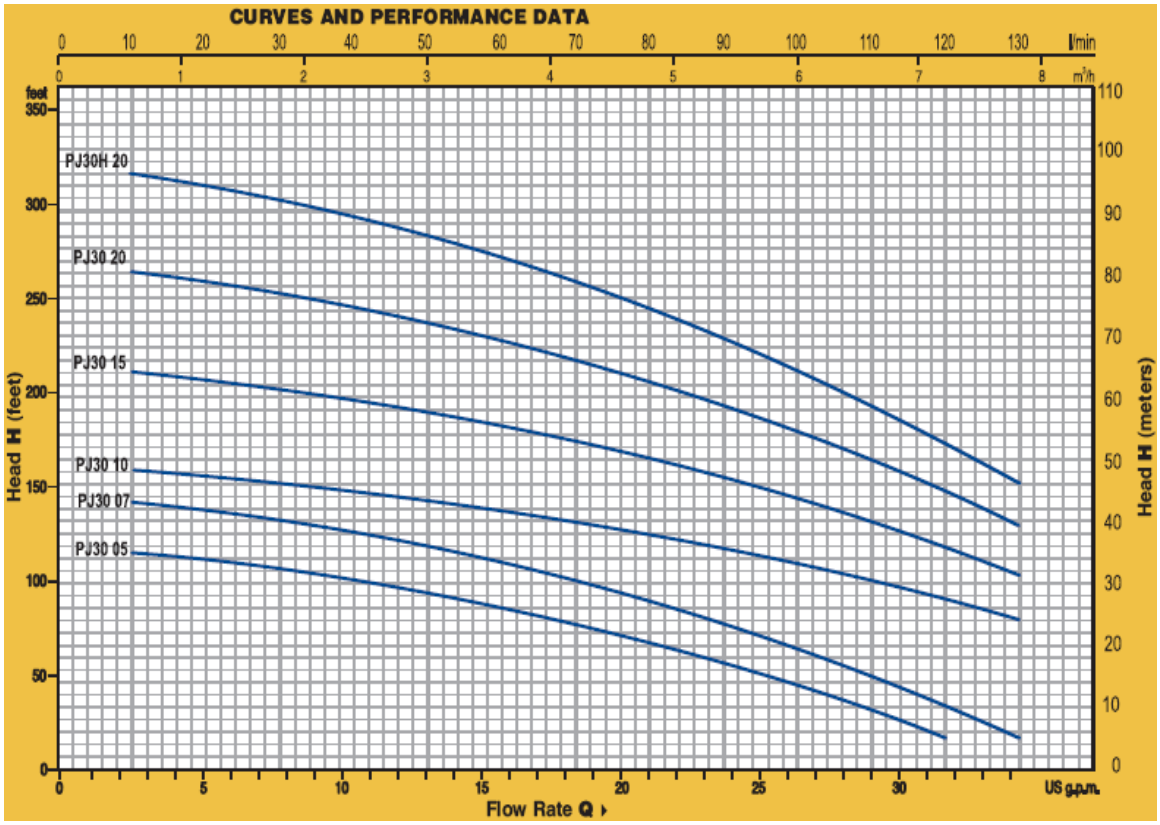

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com

www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

SELF-PRIMMING PUMPS

FLINT AND WALLING

SPJ SERIES: Design for lawn sprinkling, irrigation and more, Rapid self-priming characteristic under maximum suction conditions, Cast iron pump body and mounting ring for long life, Easy access drain plug, Double ball bearing motors for continuous operation, Available at 3/4, 1, 1 1/2, 2 and 3 HP sizes.

Maximum Case Pressure:
100 PSI

DESCRIPTION	PART NUMBER
SPRINKLER PUMP 1 HP 115/230V 1 PH; CAST IRON;	SPJ10**P**1
SPRINKLER PUMP 1 1/2" HP 115/230V 1 PH; CAST IRON;	SPJ15**P**1
SPRINKLER PUMP 1 1/2" HP 115/230V 1 PH; CAST IRON	SPJ15**B**1
SPRINKLER PUMP 2 HP 115/230V 1 PH; CAST IRON;	SPJ20**B**1
SPRINKLER PUMP 3 HP 115/230V 1 PH; CAST IRON	SPJ30**B**1

P- PVC Impeller **B-**Brass Impeller

PIPE CONECTIONS	
Suction	Discharge
2"	1 1/2"

GOULDS

GT MODEL: Once pump is primed it never needs priming again even if water level drops below the end of the suction pipe. Pumping resumes once the water level rises above the end of the suction pipe. Specifically designed for the following use: Lawn sprinkling, Irrigation, Air-conditioning systems, Heats pumps, Water transfer, Dewatering.

DESCRIPTION	PART NUMBER
SPRINKLER PUMP 3/4 HP 115/230V 1 PH; 20-40 PSI.	GT07
SPRINKLER PUMP 1 HP 115/230V 1 PH; 20-40 PSI.	GT10
SPRINKLER PUMP 11/2 HP 115/230V 1 PH; 20-40 PSI.	GT15
SPRINKLER PUMO 2 HP 230V 1PH; 20-40 PSI.	GT20
SPRINKLER PUMP 3 HP 230V 1PH; 20-40 PSI.	GT30
SPRINKLER PUMP 3 HP 230/460V 3 PH; 20-40 PSI.	GT303

PIPE CONECTIONS	
Suction	Discharge
1 1/2"	1 1/2"

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

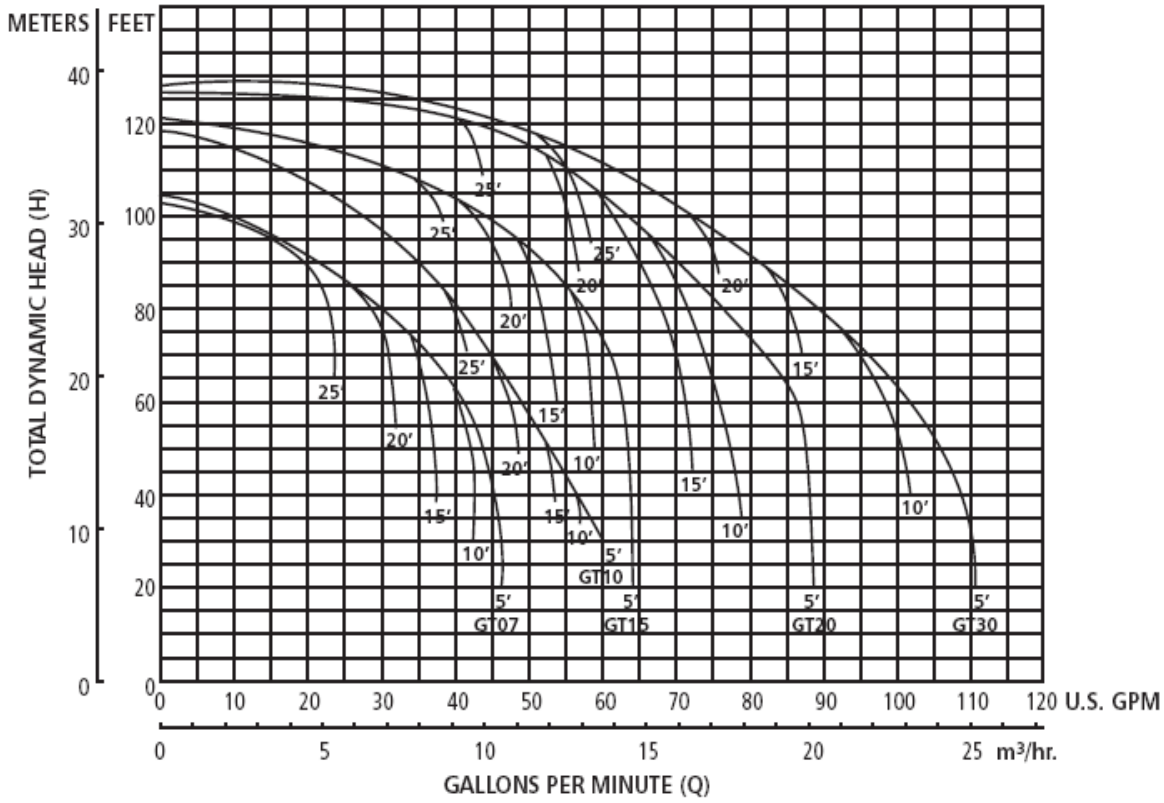

Single and three phase have same performance.

STA-RITE

DS3 SERIES: The New **Pro-Storm™** Series of cast iron sprinklers offer superior unmatched performance available in 1 HP through 2-1/2 HP models. The **Pro-Storm** models offer "single-body-fill" priming to 25-foot lifts, in less than 5 minutes!

DESCRIPTION	PART NUMBER
SPRINKLER 11/2 HP 115/230V 1 PH Cast Iron 20-40 PSI	DS3HF-01
SPRINKLER 2 HP 230V 1PH Cast Iron 20-50 PSI	DS3HG-01

	PIPE CONECTIONS	
	Suction	Discharge
DS3HF	2″	1 1/2"
DS3HG	2″	2″

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

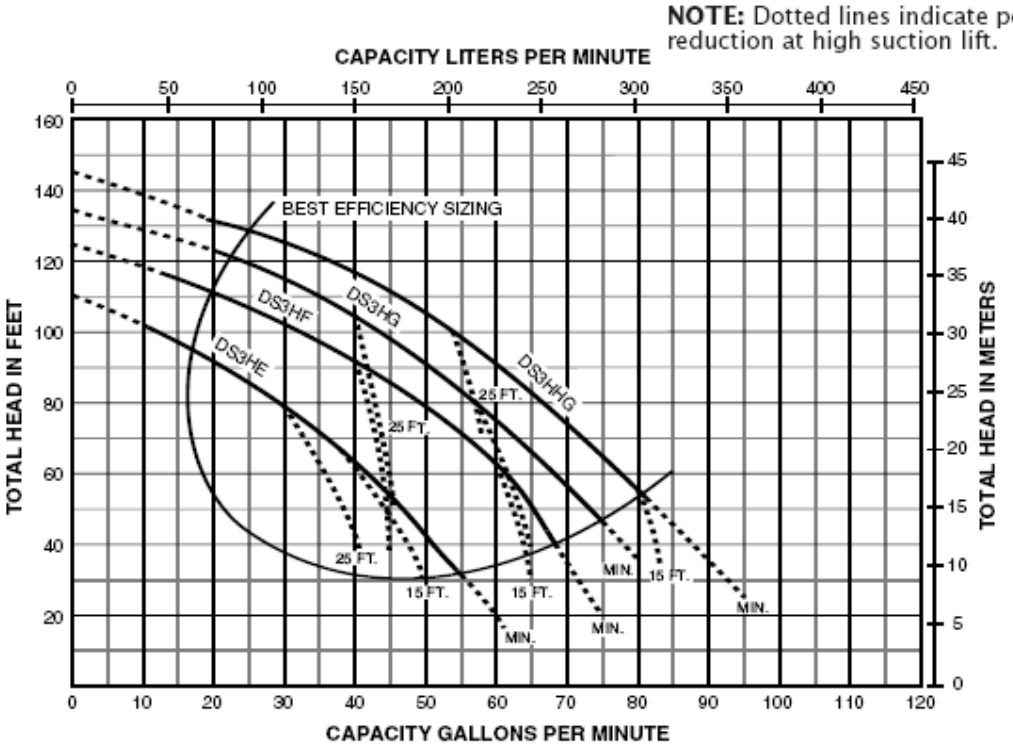

PD SERIES: Quick-priming PD pumps feature lightweight construction in a self-priming design. The 1 and 1-1/2 HP models offer a new, stronger pump body with reinforcement ribs and also a new 2" suction that is designed for the professional pump contractor.

DESCRIPTION	PART NUMBER
SPRINKLER STARITE 1HP 115/230V; FIBERGLASS	PD2HE
SPRINKLER STARITE 1.5 HP 115/230V; FIBERGLASS	PD2HF

PIPE CONECTIONS	
Suction	Discharge
2"	1 1/2"

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

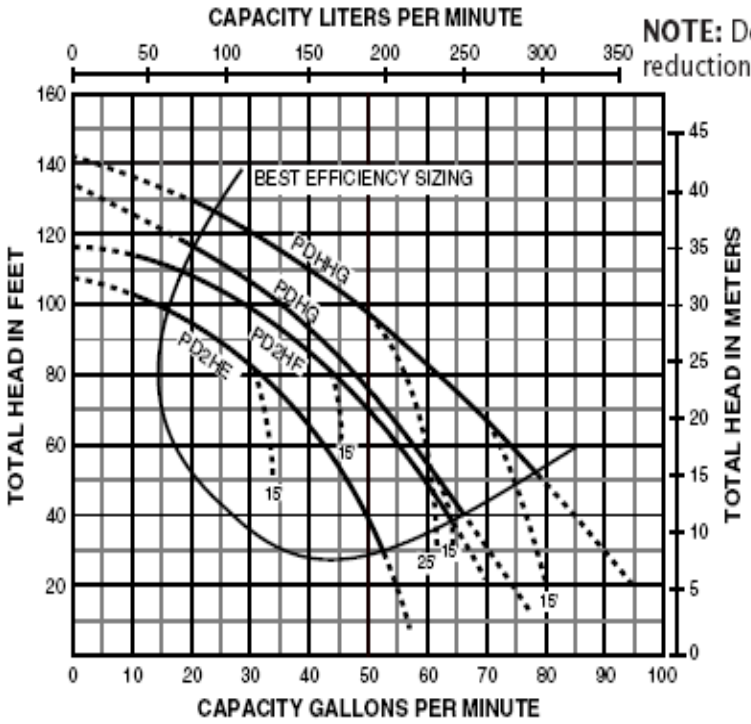

NOTE: Dotted lines indicate performance reduction at high suction lift.

D SERIES: Available in high head or medium head series. Feature leak-proof mechanical seals, easy service design, heavy-duty motors, and rugged construction. Some of the fastest priming pumps on the market. Available in 1 through 5 HP. **Optional 6" and 8" Trap Packages are available**.

DESCRIPTION	PART NUMBER
MEDIUM HEAD	
CENTRIFUGAL 3 HP 230V 1 PH; **S.F•**: PKG72; Discharge: 2" NPT	DMH-171
CENTRIFUGAL 3 HP 230/460V 3 PH; **S.F.**: PKG72; Discharge: 2" NPT	DMH3-171
CENTRIFUGAL 5 HP 230V 1 PH; **S.F.**: PKG73; Discharge: 2 1/2 " NPT	DMJ172
CENTRIFUGAL 5 HP 208/230/460 V 3 PH; **S.F.**: PKG73; Discharge: 2 1/2 " NPT	DMJ3-172
HIGH HEAD	
CENTRIFUGAL 3 HP 230V 1PH; **S.F.**: PKG53; Discharge: 1 1/2 " NPT	DHH-169
CENTRIFUGAL 3 HP 230/460 3 PH; **S.F.**: PKG53; Discharge: 1 1/2 " NPT	DHH3-169
CENTRIFUGAL 5 HP 230/460 V 3 PH; **S.F.**: PKG72; Discharge: 2" NPT	DHJ3-170
CENTRIFUGAL 5 HP 230V 1 PH; **S.F.**: PKG72; Discharge: 2" NPT	DHJ-170

S.F.- Suction Flange

Additional Accessories Required:



ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

SUCTION FLANGES (order separately)

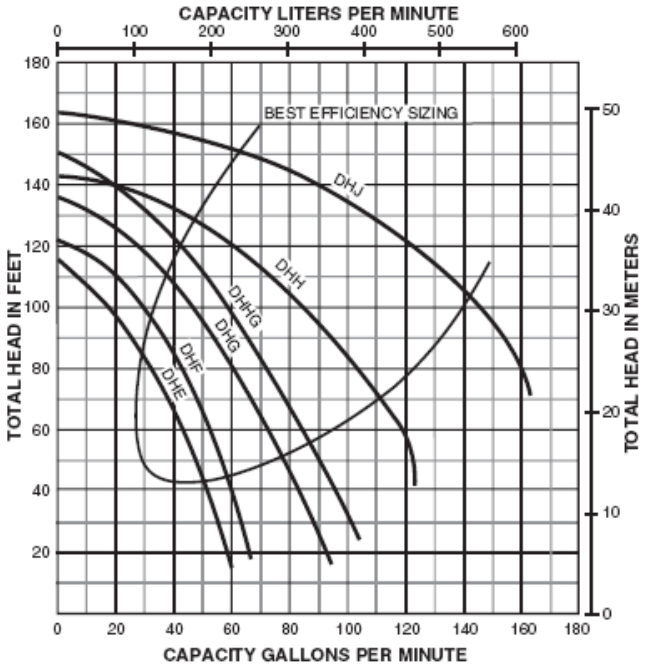

TRAP PACKAGE 6" and 8" (Optional)

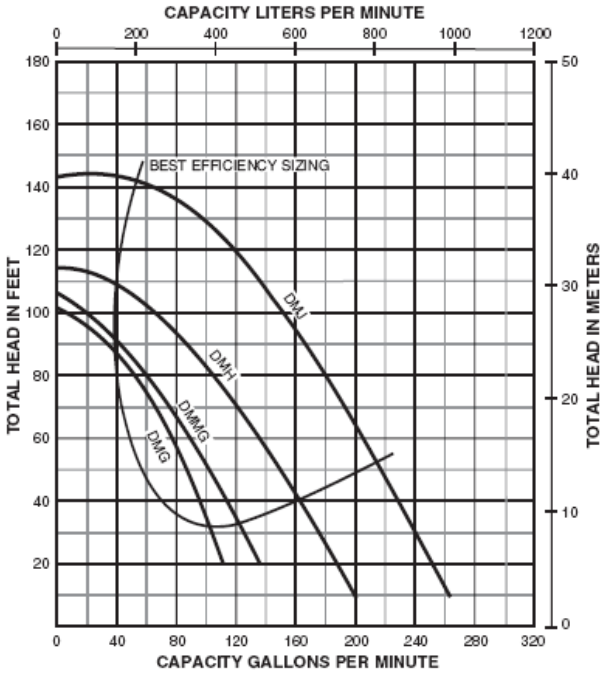

CC SERIES Straight Centrifugal Pumps: The CC SERIES Pumps are compact and lightweight, but rugged. Choose from 3 or 5 HP high head and medium head models. For lower pressures and maximum capacity, medium head models offer heads to 75 feet and capacities to 220 GPM. Where higher pressures are desired, the high head model offers heads to 102 feet and capacities to 260 GPM.
APPLICATIONS: Water Systems and Sprinkling for Homes, Farms and Industry

DESCRIPTION	PART NUMBER
MEDIUM HEAD	
3 HP 230/460V 3 PH STRAIGHT CENTRIFUGAL PUMP; 20-40 PSI	CCMH3
HIGH HEAD	
3 HP 230/460V 3 PH STRAIGHT CENTRIFUGAL PUMP; 20-40 PSI	CCHH3
3 HP 230V 1 PH STRAIGHT CENTRIFUGAL PUMP; 20-40 PSI	CCHH-137S
5 HP 230/460V 3PH STRAIGHT CENTRIFUGAL PUMP; 20-40 PSI	CCHJ3

NOTE: Pumps installed with a PRO-Source™ tank require 100-PSI relief valve. Pumps installed with a conventional tank require a 75-PSI relief valve. Relieve valve must be capable of relieving entire flow of pump at relief pressure.

PIPE CONECTIONS	
Suction	Discharge
2 1/2"	2"

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

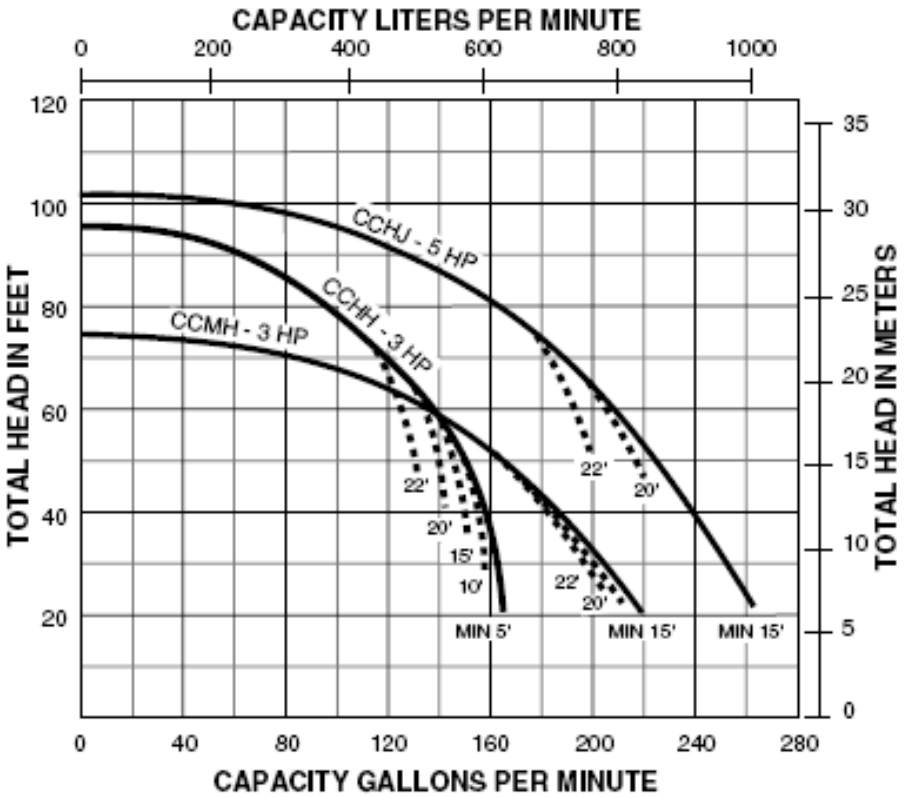

NOTE: Dotted lines indicate performance reduction at high suction lift.

POOL PUMPS

ACCESSORIES

Hayward® and Sta-rite, pool pumps strainer basket for filtration.
Hayward® offers the very latest in pool filter technology ensuring your pool water is clear and clean. Our filters' simplistic operation and low maintenance requirements set new standards for performance, value and dependability. Molded of tough, durable, colorfast reinforced thermo-plastic Hayward filters deliver reliable, all-weather performance with minimal care.
1 1/2" or 2" FIP, OR 2" SKT connections for plumbing versatility.
1/2" **14NPSM Filter Drain** for fast draining

FILTERS

DESCRIPTION	PART NUMBER
HAYWARD FILTERS C-12002, **EFA*:** 120 ft^2, **DFR**:** 120 GPM	C-12002
HAYWARD FILTERS C-17502, **EFA:** 175 ft^2, **DFR:** 120 GPM	C-17502
HAYWARD FILTERS C-500	C-500
HAYWARD FILTERS C-9002, **EFA:** 90 ft^2, **DFR:** 90 GPM	C-9002

***EFA:** **E**ffective **F**iltration **A**rea
****DFR:** **D**esign **F**low **R**ate.

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

PUMPS

CARTRIDGES

DESCRIPTION	PART NUMBER
HAYWARD REPLACEMENT CARTRIDGE CX500R	CX500RE
HAYWARD REPLACEMENT CARTRIDGE C800RE	CX800RE
HAYWARD REPLACEMENT CARTRIDGE C870RE	CX870RE
HAYWARD REPLACEMENT CARTRIDGE C900RE	CX900RE
HAYWARD REPLACEMENT CARTRIDGE CX1100	CX1100RE
HAYWARD REPLACEMENT CARTRIDGE CX1200	CX1200RE
HAYWARD REPLACEMENT CARTRIDGE C1750RE	C1750RE

POOL PUMPS

- This large capacity pool pump combines durable corrosion-proof construction with state-of-the-art performance for years of trouble-free service.
- You will enjoy its clear, easy-open strainer lid, super-size "leaf holding" basket and super quiet operation.
- Easily installs on existing in-ground pool systems with a unique, stable mounting base for additional versatility.

DESCRIPTION	PART NUMBER
1/2 HP MAXFLO POOL PUMP 115V; 1 1/2" NPT	SP2800X5
3/4 HP MAXFLO POOL PUMP 115/230V; 1 1/2" NPT	SP2805X7
1 HP MAXFLO POOL PUMP 115/230V; 1 1/2" NPT	SP2807X10
1 1/2 HP MAXFLO POOL PUMP 115/230V; 1 1/2" NPT	SP2810X15
2 HP MAXFLO POOL PUMP 115/230V 1 1/2" NPT	SPX2815X20

Performance Data	Pump Output (GPM) vs. Total Resistance To Flow (Feet of Head)					
Model No. Max Rated	**20 ft**	**30 ft**	**40 ft**	**50 ft**	**60 ft**	**70 ft**
SP2800X5	53	43	28	----	-----	----
SP2805X7	61	52	40	20	-----	-----
SP2807X10	75	61	51	38	4	-----
SP2810X15	83	74	64	51	34	-----
SP2815X20	96	88	77	68	53	30

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

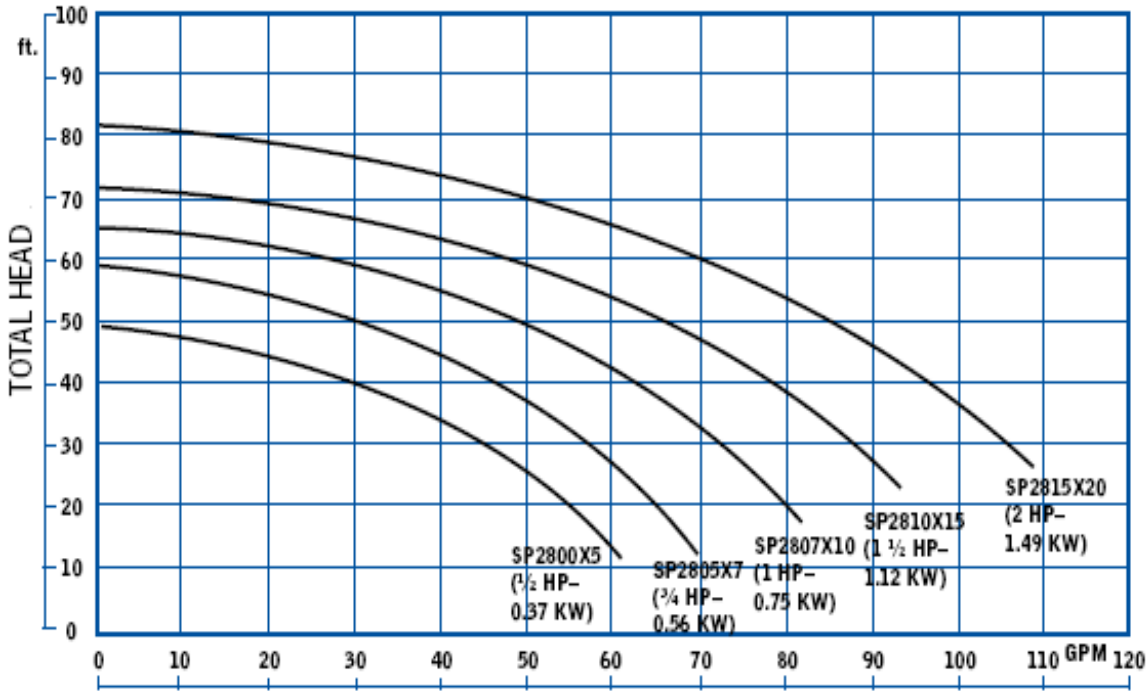

DESCRIPTION	PART NUMBER
3/4 HP 115/230V 1 1/2" NPT SUPER POOL PUMP HAYWARD	SP2605X7
1 HP 115/230V 1 1/2" NPT SUPER POOL PUMP HAYWARD	SP2607X10
1 1/2 HP 115/230V 1 1/2" NPT SUPER POOL PUMP HAYWARD	SP2610X15
2 HP 115/230V 2" NPT SUPER POOL PUMP HAYWARD	SP2615X20
2 1/2 HP 230V 2" NPT SUPER POOL PUMP HAYWARD	SP2621X25

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

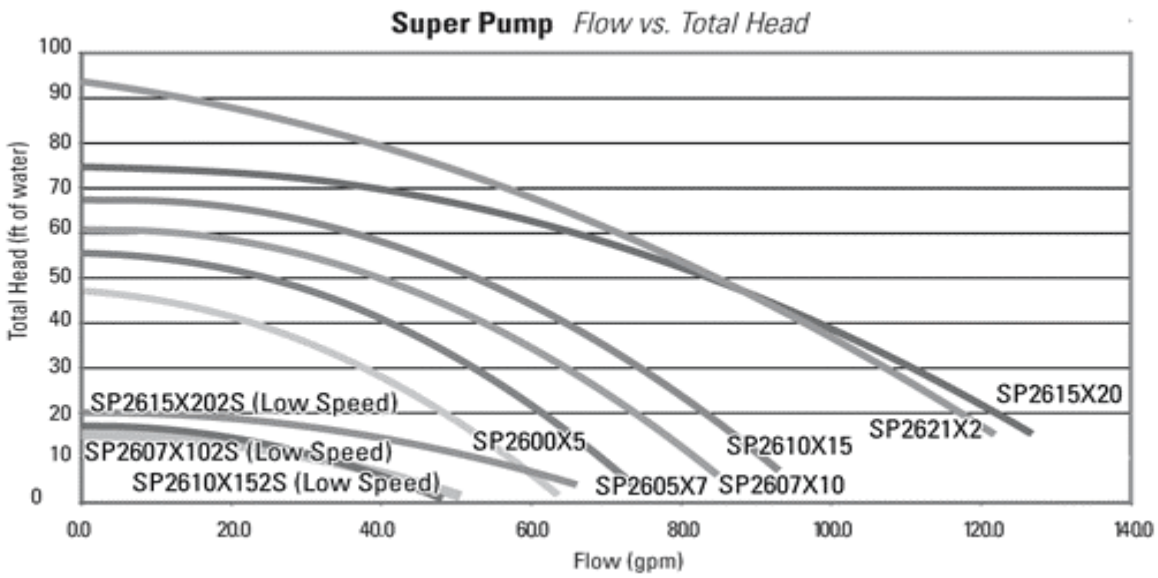

DESCRIPTION	PART NUMBER
2 HP 115/230V 2" NPT SUPER II POOL PUMP HAYWARD	SUPERPOOLII
3 HP 230V 2" NPT; SUPER II POOL PUMP HAYWARD	SP3025X30AZ

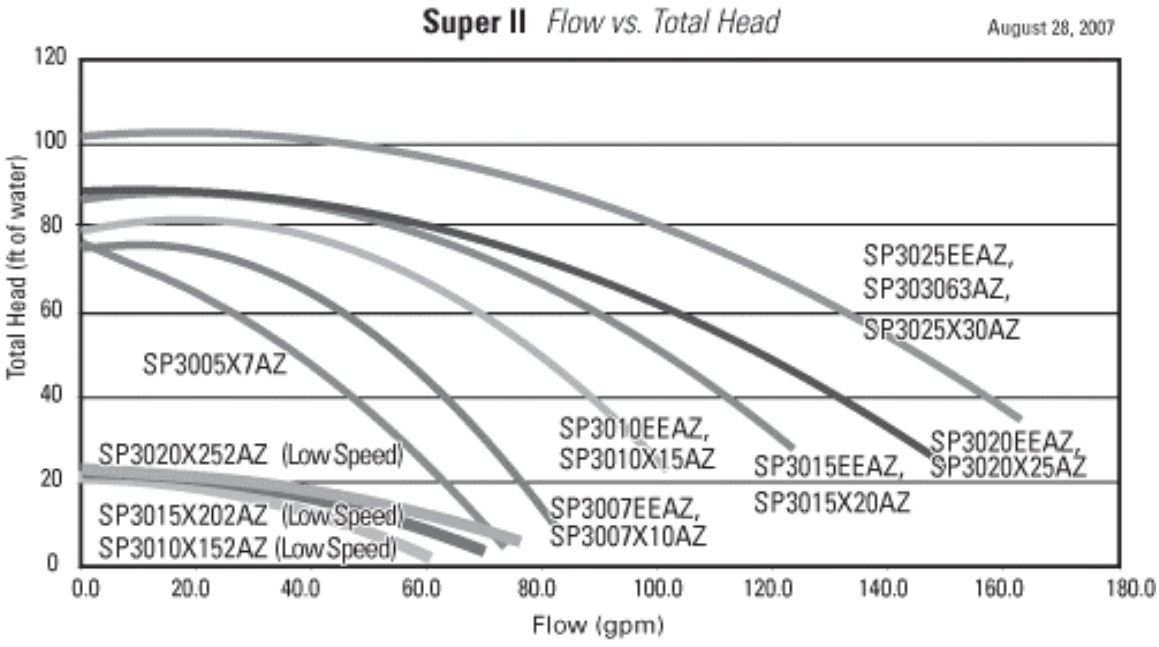

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

ORUM

DESCRIPTION	PART NUMBER
3/4 HP 115/230V POOL PUMP	
1 HP 115/230V POOL PUMP	
1 1/2 HP 115/230V POOL PUMP	
2 HP 230V POOL PUMP	
2 1/2 HP 230V POOL PUMP	

PIPE CONECTIONS	
Suction	Discharge
2″	2″

STA-RITE

Large Trap: Minimizes pool maintenance by collecting large amounts of debris without clogging or starving your pump.
Moves Large Volumes of Water: Comparatively small amounts of electricity, this saves energy, which is not only good for you, but also for the environment.
Thermoplastic Housing: Withstands the elements and temperature extremes.
Finger Opening Drain Plugs: Lets you winterize your pump without using tools.

DESCRIPTION	PART NUMBER
1/2 HP 115/230V DURA GLAS POOL PUMP	P2RA5CL
3/4 HP 115/230V DURA GLAS POOL PUMP	P2RA5D-180L
1 HP 115/230V DURA GLAS POOL PUMP	STA10442
1 1/2 HP 115/230V DURA GLAS POOL PUMP PLASTIC	P2RA5F-182L

PIPE CONECTIONS	
Suction	Discharge
1 1/2"	1 1/2″

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

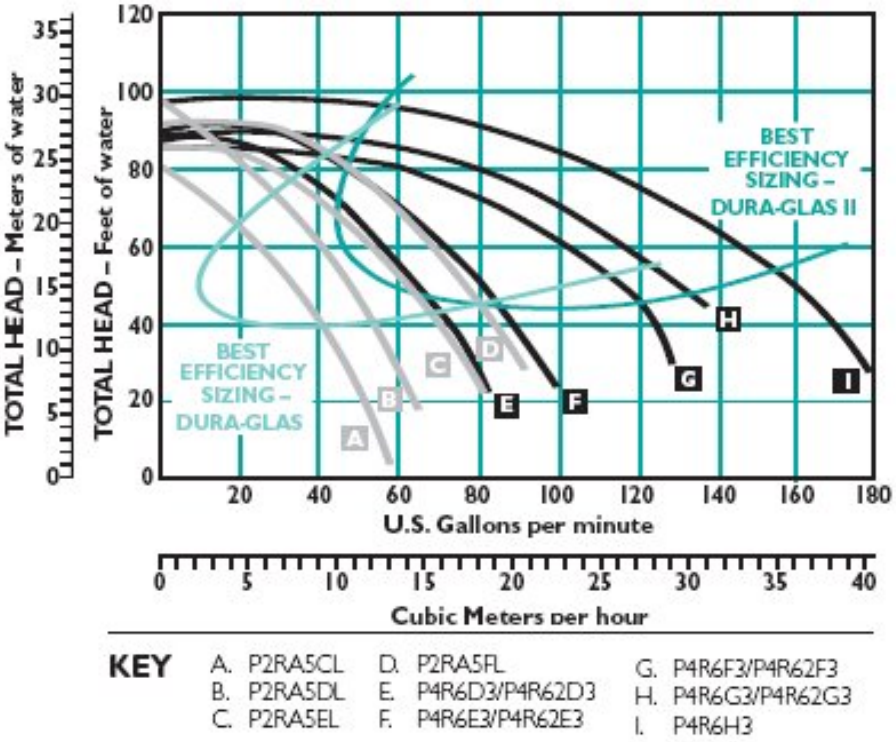

SPA-PUMPS

2 buttresses, 11/2: NPT threads on suction and discharge, strainer with basket, 230 volts
Used for above ground pools, Jacuzzi, and waterfalls

DESCRIPTION	PART NUMBER
HI-FLO WETEND 3/4 HP SIDE DISCHARGE 2” x 2”.	3101120SD
HI-FLO WETEND 1 HP SIDE DISCHARGE 2”x 2”	3101130SD
HI-FLO WETEND 11/2 HP SIDE DISCHARGE 2” x 2”	3101140SD
HI-FLO WETEND 2 HP SIDE DISCHARGE 2” x 2”	3101141SD
HI-FLO WETEND 3 HP SIDE DISCHARGE 2” x 2”	3101150SD
HI-FLO WETEND 4 HP SIDE DISCHARGE 2” x 2”	3101160SD

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
WETEND HYDRO SPA 1/2 HP CENTER DISCHARGE 1.5”	3101110
WETEND HYDRO SPA 3/4 HP CENTER DISCHARGE 1.5”	3101120
WETEND HYDRO SPA 1 HP CENTER DISCHARGE 1.5”	3101130
WETEND HYDRO SPA 11/2HP CENTER DISCHARGE 1.5”	3101140
WETEND HYDRO SPA 2 HP CENTER DISCHARGE 1.5”	3101141

PRESSURE TANK

FIBERGLASS TANKS

Outer Shell: Fiberglass wound and epoxy resin sealed, **Air Cell:** Heavy mil ethyl-vinyl-acetate (EVA), **Upper and Lower Flanges:** Reinforced polypropylene, **Base:** One-piece high-density polyethylene, **Service Connection:** Stainless steel on all models, **Air Valve:** Brass body Schrader Core Assembly, **Weather Cap:** High Density Polyethylene.

DESCRIPTION	PART NUMBER
FIBERGLASS TANK PSP-FW35-10 **35 GAL**	SR35-10S
FIBERGLASS TANK PSP-FW60-18 **60 GAL**	SR60-18
FIBERGLASS TANK PSP-FW85-25 **85 GAL**	SR85-25-01
FIBERGLASS TANK PSP-FW119-35 **119 GAL**	SR119-35
FIBERGLASS TANK PSP-FW20-6 **20 GAL**	SR20-6S-01

ORDERING INFORMATION

Catalog Number	Max. Capacity gal/liter	Diameter inch/cm	Height inch/cm	Service Clearance inch/cm	Precharge PSI/kPa	Connection Size Female	Connection Material	Drawdown in Gallons/Liters		
								20-40	30-50	40-60
SR20-6S	20/76	16/41	36/92	48/122	40/276	1" NPT	Stn. Stl.	6.9/26.2	5.9/22.4	5.2/19.7
SR35-10S	35/133	20/51	39.5/101	51/130	40/276	1" NPT	Stn. Stl.	12.1/46.0	10.3/39.1	9.0/34.2
SR40-12S	40/151	16/41	60.5/154	80/201	40/276	1" NPT	Stn. Stl.	13.8/52.2	11.8/44.7	10.3/39.0
SR48-14S	48/182	20/51	50.25/128	69/175	40/276	1" NPT	Stn. Stl.	16.5/62.5	14.2/53.8	12.4/46.9
SR60-18	60/228	24/61	45.75/117	58/148	40/276	1-1/4" NPT	Stn. Stl.	20.7/78.6	17.7/67.2	15.5/58.9
SR85-25	85/323	24/61	59.5/152	78/199	40/276	1-1/4" NPT	Stn. Stl.	29.3/111.3	25.1/95.3	21.9/83.2
SR119-35	119/452	28/72	62.25/159	81/206	40/276	1-1/4" NPT	Stn. Stl.	41.1/156.1	35.1/133.3	30.7/116.6

Maximum Operating Pressure = 100 PSI
Maximum Liquid Temperature: 120°F (49°C)
Maximum External (Ambient) Temperature: 125°F (52°C)

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

STEEL TANKS

Shell: Heavy gauge steel, **Base:** High-impact composite; ABS, **Finish:** Electrostatically applied, baked-on polyester paint
Water Cell: One-piece seamless PVC, made from FDA listed material, **Flange:** reinforced polypropylene, **Service Connection:** reinforced polypropylene, integral to flange, **Air Valve:** Rubber stem/brass body, **UV Valve Cover:** High density polyethylene
40-PSI Precharge: Ready for use with 40/60 pressure range systems. Enables installer to reduce pressure depending on pressure switch setting.

DESCRIPTION	PART NUMBER
VERTICAL STEEL TANKCA15 IN-LINE **6 GAL**	PS6-S02
VERTICAL STEEL TANK **50 GAL** PRO-SOURCE	PS50-T50
VERTICAL STEEL TANK **62 GAL** PRO-SOURCE	PS62-T51
VERTICAL STEEL TANK **85 GAL** PRO-SOURCE	PS85-T52
VERTICAL STEEL TANK **19 GAL** PRO-SOURCE **SHORT**	PS19S-T02
VERTICAL STEEL TANK **35 GAL** PRO-SOURCE	PS35-T05

ORDERING INFORMATION — HORIZONTAL MODELS • VERTICAL MODELS

Model Number	Maximum Capacity Gal. / Liter	Diameter* Inch / cm	Height* Inch / cm	Length Inch / cm	Precharge PSI / kPa	Connection Size Female	Drawdown in Gal. / Liter		
							20 - 40	30 - 50	40 - 60
PS6-S02	6.0 / 22.7	12 / 30.5	16.1 / 40.9	–	40 / 276	3/4" NPT	2.2 / 8.3	1.8 / 6.8	1.6 / 6.0
PS19S-T02	19 / 72	20 / 51	21 / 53.3	–	40 / 276	1" NPT	6.9 / 26.1	5.8 / 21.9	5.0 / 18.9
PS19T-T02	19 / 72	16 / 40.6	27.5 / 70	–	40 / 276	1" NPT	6.9 / 26.1	5.8 / 21.9	5.0 / 18.9
PS32-T03	32 / 121	16 / 40.6	43 / 109	–	40 / 276	1" NPT	11.6 / 43.9	9.8 / 37.1	8.5 / 32.2
PS35 -T05	35 / 133	20 / 51	33 / 84	–	40 / 276	1" NPT	12.7 / 48.1	10.7 / 40.5	9.3 / 35.2
PS50-T50	50 / 189	24 / 61	32.5 / 83	–	40 / 276	1-1/4" NPT	18.3 / 69.3	15.5 / 58.7	13.4 / 50.7
PS62-T51	62 / 235	24 / 61	39.5 / 100	–	40 / 276	1-1/4" NPT	21.4 / 81	18.3 / 69.3	16 / 60.6
PS85-T52	85 / 322	24 / 61	51 / 130	–	40 / 276	1-1/4" NPT	30 / 113.6	26 / 98.4	22 / 83.3
PS119-TR50	119 / 450	24 / 61	68 / 173	–	40 / 276	1-1/4" NPT	41.3 / 156.3	35.4 / 134	31 / 117.3

*Subject to change without notice. Maximum Operating Pressure = 100 PSI Maximum Liquid Temperature: 120°F (49°C) Maximum External (Ambient) Temperature: 125°F (52°C)

SEWAGE /SUMP

We stock a wide variety of pumps and accessories for all sewage and sump applications

ACCESSORIES

CONTROL PANELS

It is available in simplex and duplex designs. Automatically maintains pump operation, includes high level alarm warning for a variety of sump, effluent, sewage and water transfer applications.

Duplex Weatherproof Control Panel: Single and three Phase Panel, High Level Alarm, NEMA 4X Fiberglass Enclosure, 30 watt, flashing red light, alarm horn 95db, Electronic pump alternator, Alternator selector switch, Lag pump start delay.

DESCRIPTION	PART NUMBER
DUPLEX CONTROL PANEL 115/230V 1 PH 60 HZ	D10020

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

Simplex Weatherproof Control Panel: Single and three Phase Panel, High Level Alarm, NEMA 4X Fiberglass Enclosure, 30 watt, flashing red light, Solid state printed circuit control board with float indicator lights, alarm horn 95db, Auxiliary alarm contacts.

DESCRIPTION	PART NUMBER
SIMPLEX CONTROL PANEL 115/230V 1 PH 60 HZ	S10020

GUIDE RAIL SYSTEMS (Call for Price)

Base with integral cast elbow, pump adapter, guide assembly with fasteners. Upper guide rail, positioning bracket. Simplex and duplex.
Designed for sewage/submersible pump stations
Provide an easy means of removing pump from a wet-well by utilizing a quick disconnect and guide rail system.
Connect directly to 1 ¼", 1 ½", or 2" vertical discharge Effluent, Wastewater and Grinder Pums.
Adaptable to 1 ½" and 2" threaded, horizontal discharge pumps by using a street elbow.

STANDARD COMPONENTS
SS Guide rails, base, cross braces and pump brackets.
SS lifting cable, 96" long x 3/16" cable.
Brass quick disconnect with o-ring seal.
Schedule 40 galvanized discharge pipe. Optional stainless steel pipe nipples are available.
Cast iron check valve with BUNA ball.
SS tee handle for shut-off valve is supplied (it is for use with the optional discharge pipe assemblies).

OPTIONAL EQUIPMENT

Simplex discharge piping includes a union and a shut-off valve
H125 (11/4") discharge use with **A10-12**.
H20S (2") discharge use with **A10-2015** or **A10-20**

Duplex discharge piping includes (2) unions, (2) shut-off valves and tee assembly; **H12D** (11/4") discharge use with **A10-12; H20** (2") discharge use with **A10-2015** or **A10-20**

DESCRIPTION	PART NUMBER
DUPLEX 11/4" SLIDE RAIL	A1012H12D
SIMPLEX 11/4" SLIDE RAIL	A1012H12S
SIMPLEX 11/2" SLIDE RAIL	A102015H20S
DUPLEX 11/2" SLIDE RAIL	A102015H20D
DUPLEX 2" SLIDE RAIL	A1020H20D
SIMPLEX 2" SLIDE RAIL	A1020H20S

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

DEWATERING

LSP SERIES:
Corrosion Resistant Construction. Stainless Steel Motor Casing and Fasteners. Glass-Filled Thermoplastic Impeller and Casing. Upper and Lower Heavy Duty Ball Bearing Construction. Permanently Lubricated Motor for Extended Service Life and is Powered for Continuous Operation. Stainless Steel Pump Shaft. Adjustable Float Switch for Various Liquid Levels. Available in Manual and Automatic Versions. Light Weight, Portable and Easy to Service.

APPLICATIONS: Basement Draining, Water Transfer, and Dewatering.

DESCRIPTION	PART NUMBER
3/4 HP 115 Volt with FLOAT, 1 PH, 20 FT CORD, **MPS*: 16 Ft, MH*: 34 Ft.**	LSP0711AF
1/3 HP GOULDS, 10 FT CORD, **57 GPM**, **MPS*: 10 Ft, MH*: 34 Ft.**	LSP0311

MPS – Maximum Pump Submergence.
MH – Maximum Head.
Discharge Size: 1 1/2 NPT

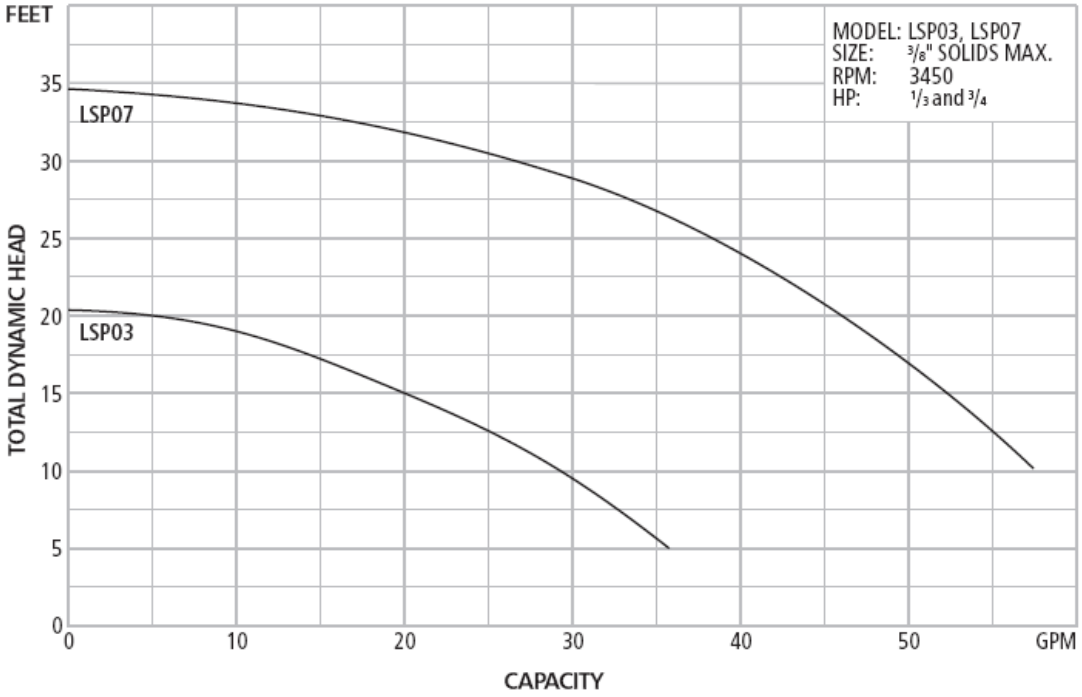

EP SERIES: (Model 3871)
Thermoplastic Semi-Open Impeller Design with Pump Out Vanes for Mechanical Seal Protection.

APPLICATIONS: Effluent Systems, Homes/Farms, Heavy Duty Sump, Water Transfer, and Dewatering.

DESCRIPTION	PART NUMBER
0.4 HP 1550 RPM, 115/230 VOLT, 1 PH, **60 GPM**, 10 FT CORD, **MH*: 31 Ft**.	EP0411A

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

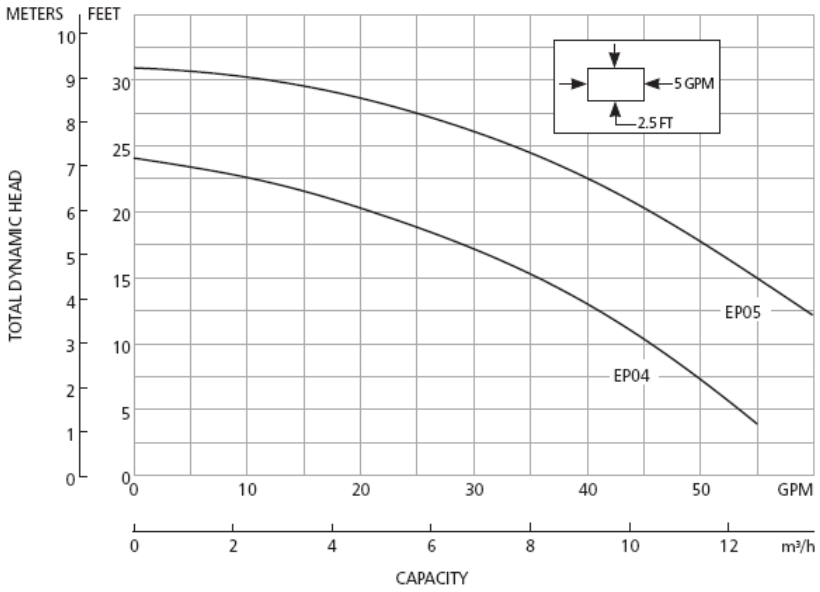

MH – Maximum Head.
Discharge Size: 1 1/2 NPT.

RX SUMP PUMP model: Suitable for draining clear water without abrasive particles. The construction guarantees simple and safe operation due to the complete cooling of the motor by the pumped water, and the double seal design. They are recommended for fixed installations, emergency draining of small flooded areas (basement rooms, cellars, garages), for disposal of dirty water used in the home by washing machines and dishwashers and for draining collection traps.

FLOW RATE: 79 GPM, HEAD UP TO 75 ft, BODY: Stainless Steel AISI 304, Submersible asynchronous motor.

DESCRIPTION	PART NUMBER
SUMP PUMP 1/3 HP 115 V 1PH 60 HZ, STAINLESS STEEL, 11/4" NPT	RX03A16S

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

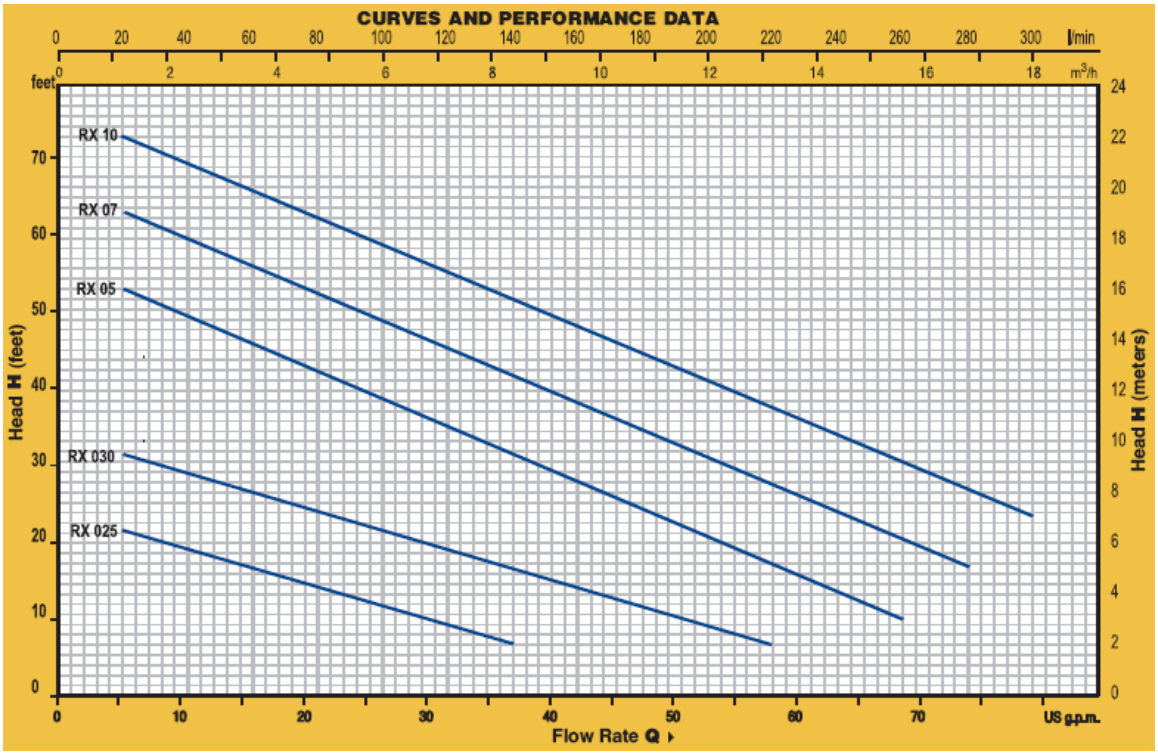

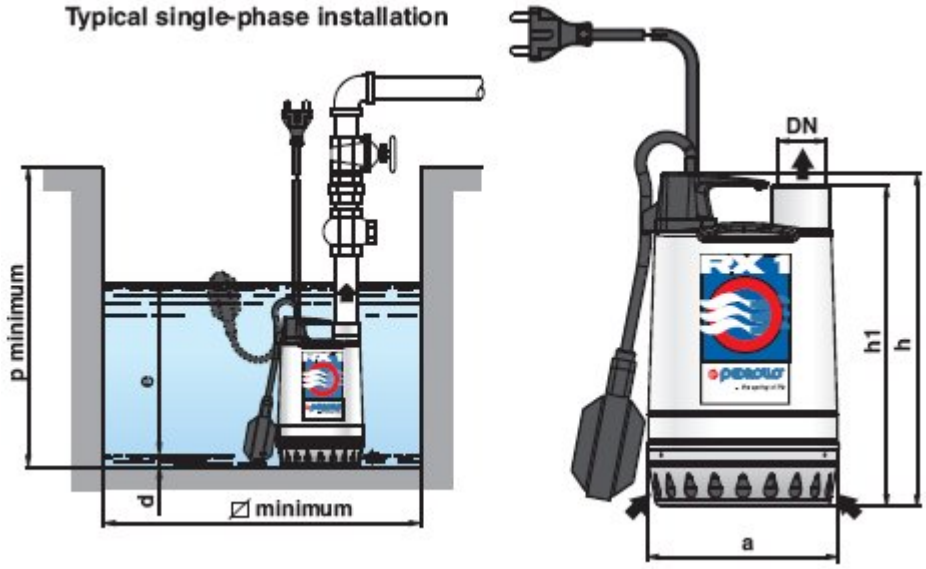

MODEL		DISCH	DIMENSIONS INCHES						
1 PH	3 PH	DN	a	h	h1	d	e	p	⌀
RX 025		1 1/4"	5.7	10.0	9.7	0.6	Adjustable	13.8	13.8
RX 030	RX 030								
RX 05	RX 05	1 1/2"	8.4	13.9	13.2	1.1		19.7	19.7
RX 07	RX 07								
RX 10	RX 10								

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

TOP SUMP PUMP Model: Suitable for draining clear water without abrasive particles. The construction guarantees simple and safe operation due to the complete cooling of the motor by the pumped water and the double seal design. They are recommended for emergency draining of small flooded areas (rooms, cellars, garages), for the disposal of waste water in the home (dishwasher, washing machine) and for emptying drainage traps.

FLOW RATE: 105 GPM, HEAD UP TO 48 ft, BODY: glass filled techno polymer, Submersible asynchronous motor.

DESCRIPTION	PART NUMBER
SUMP PUMP 1/3 HP 115 V 1PH 60 HZ, Glass Filled techno polymer, 1" NPT	TOP033A16S
SUMP PUMP 1/4 HP 115 V 1PH 60 HZ, Glass Filled techno polymer, 11/4" NPT	TOP025A16S

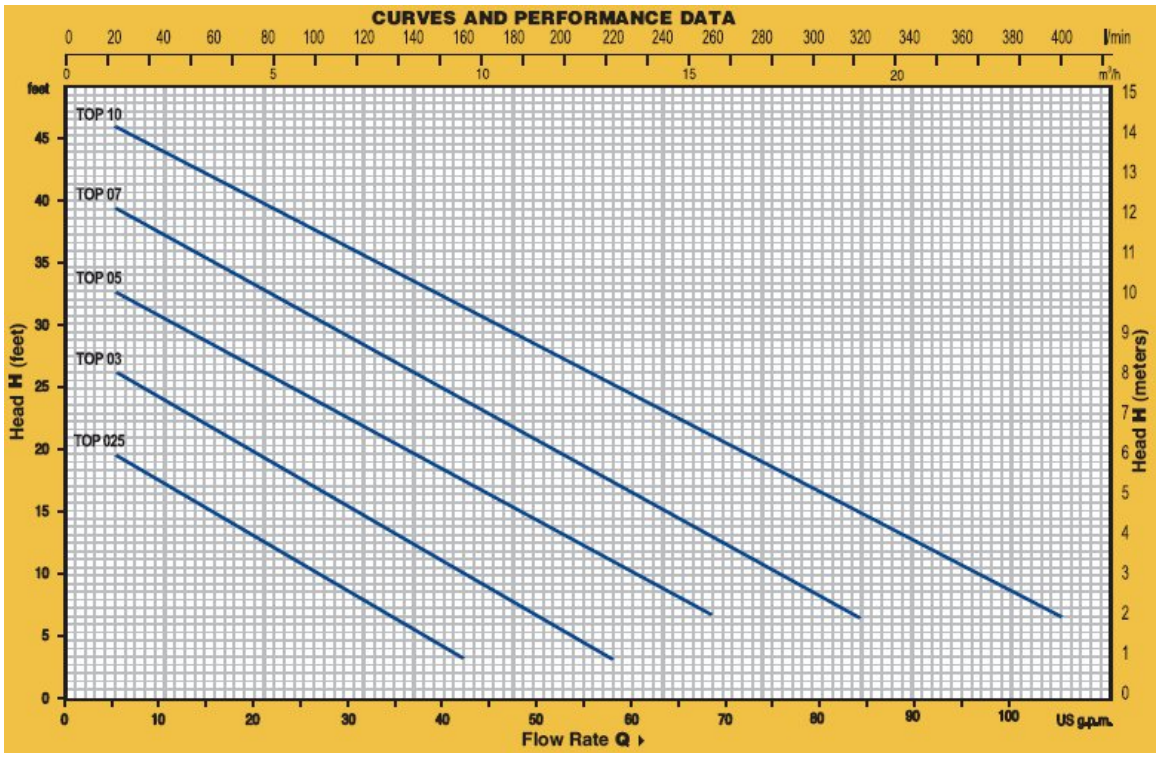

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

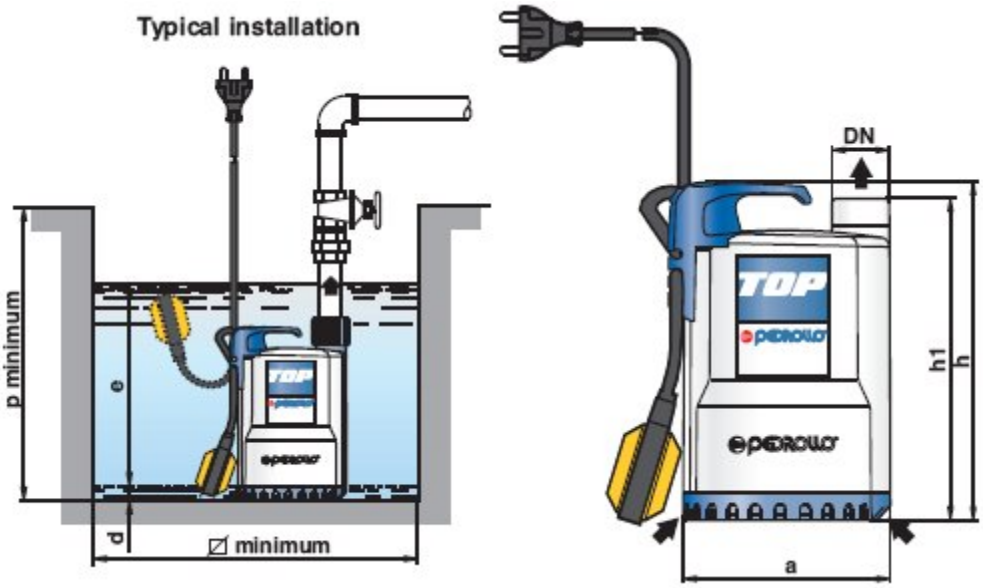

MODEL	DISCH				DIMENSIONS INCHES			
1 PH	DN	a	h	h1	d	e	p	min
TOP 025	1"	5.9	9.1	8.5	14	ADJUSTABLE	13.7	13.7
TOP 03	1 1/4"		10.1	9.3				
TOP 05			11.3	10.5				
TOP 07	1 1/2"	8.0	13.1	12.2	0.8		17.7	17.7
TOP 10								

EFFLUENT

WE SERIES: (Model 3885)

- Capacity up to 140 GPM.
- Total Heads up to 128 Ft. TDH (Discharge Size: 2" NPT).
- Rugged Thermoplastic Casing and Base
- Cast Iron Motor Housing for Efficient Heat Transfer, Strength, and Durability
- Severe Duty Rated oil and Water Resistant Power Cable

APPLICATIONS: Homes, Farms, Trailer courts, Motels, Schools, Hospitals, Industry, Effluent systems.

DESCRIPTION	PART NUMBER
EFFLUENT SUB 1/3 HP 115 VOLT LOW HEAD	WE0311L

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

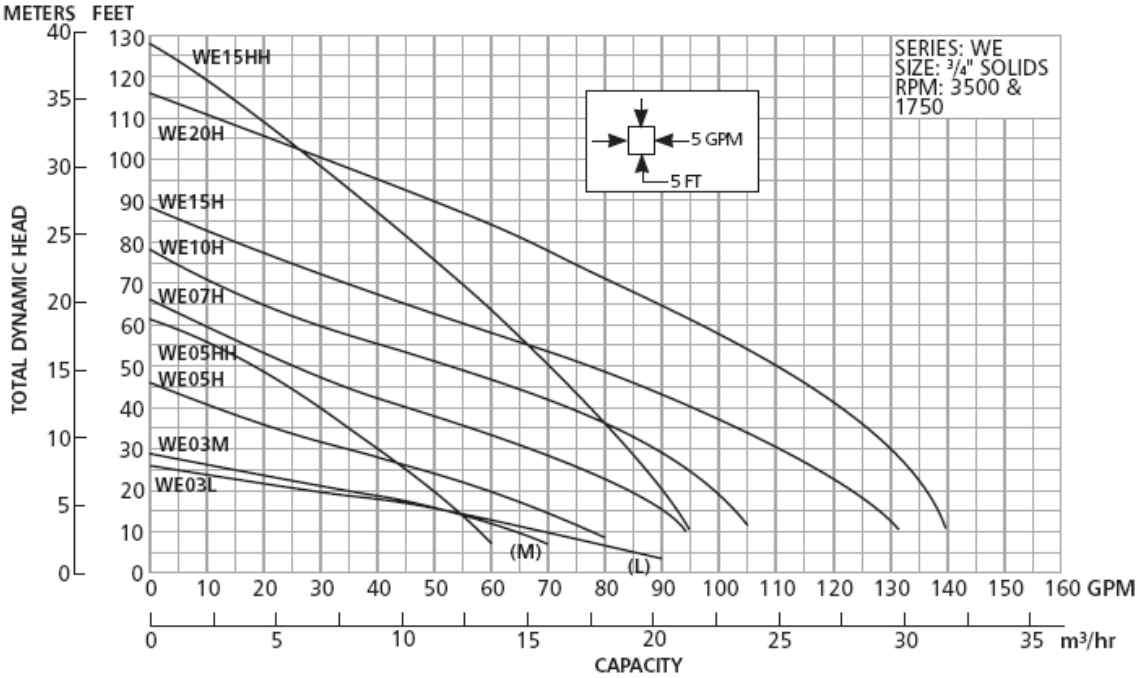

GRINDER

Capable of grinding domestic sewage in individual residential applications. Anti-Roping Design Cutter System. Silicon Bronze semi-open impeller with non-overloading two-vane design and pump-out vanes for mechanical seal protection. Capacity up to 41 GPM.
Total Heads up to 95 Ft TDH.

APPLICATIONS: Designed for high head sewage applications where a gravity system is not practical. Ideal for pressure sewage systems

G&L A GOULDS PUMPS COMPANY

DESCRIPTION	PART NUMBER
SUBMERSIBLE GRINDER PUMP 2 HP 1PH 230 VOLTS	RGS2012

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

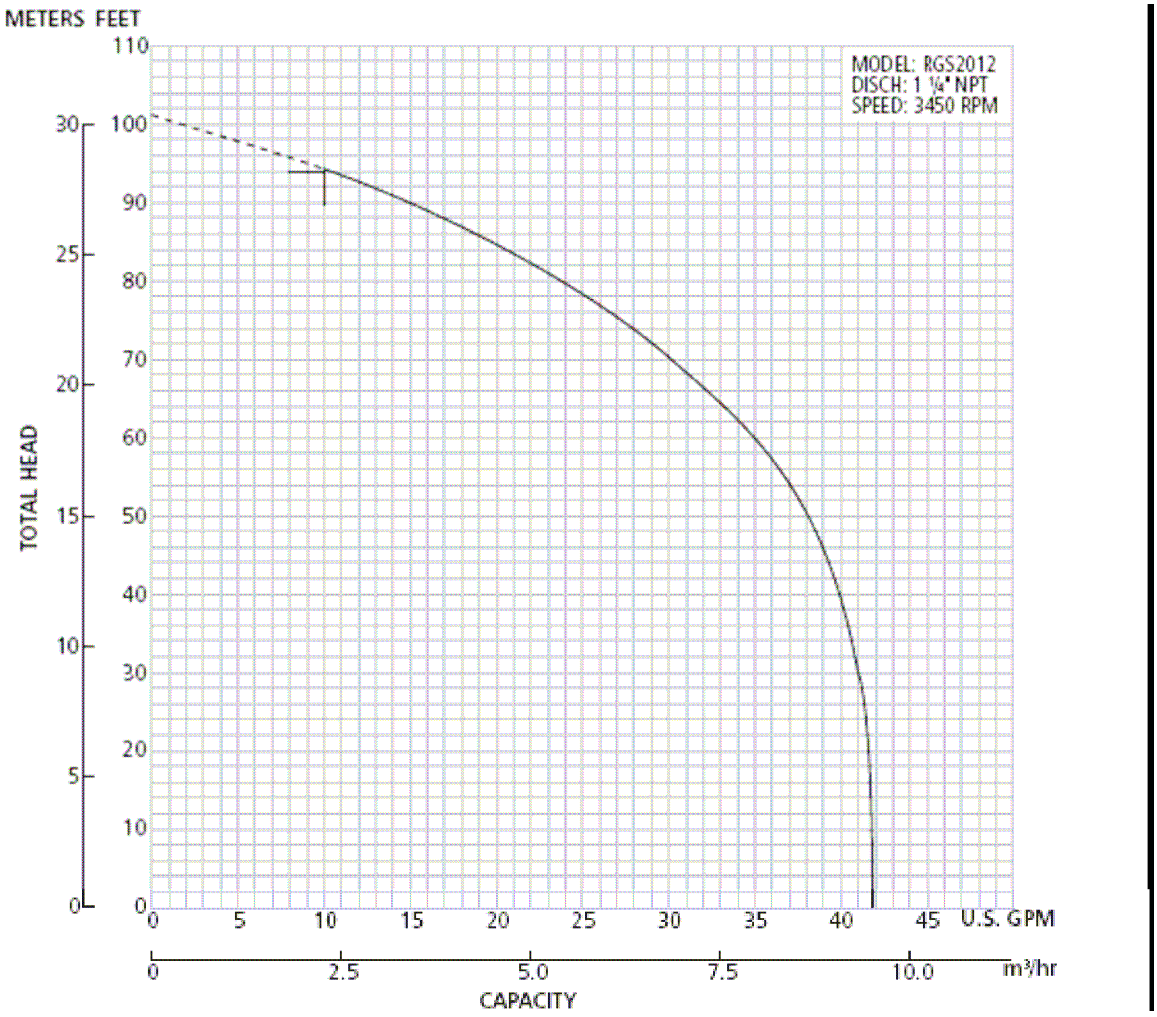

Liberty Pumps

Liberty's **LSG200-Series** Grinder Pumps meet the demanding needs of commercial and residential sewage applications where difficult solids-handling ability is crucial. The LSG200-Series features a superior cutting system made of hardened 440 stainless steel-Rockwell C58, for shearing solids into small particles prior to being passed to the discharge by the impeller under high pressure. Applications include individual or groups of homes, motels, schools, shopping centers, lakefront developments and systems requiring high pressure sewage pumping.

DESCRIPTION	PART NUMBER
GRINDER PUMP 2 HP 1 PHASE 230 VOLT; HORIZONTAL DISCHARGE: 1 ¼" FNPT *	LSG202M
GRINDER PUMP 2 HP 3 PHASE 440-480 VOLT; HORIZONTAL DISCHARGE 1 ¼" FNPT *	LSG204M

***25 feet power cord with Quick-Disconnect.**

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

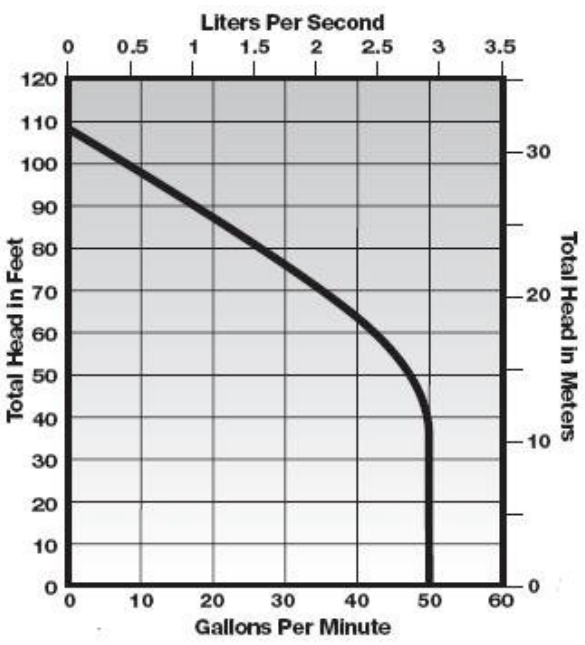

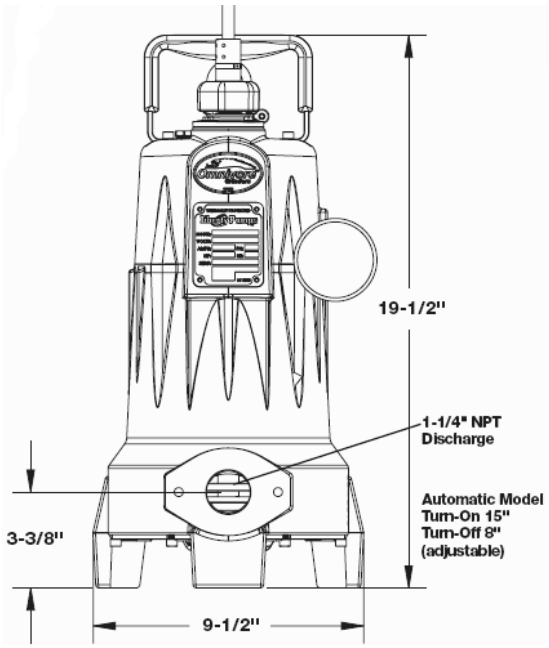

GR20 Guide Rail Base
with integrated ball check valve
(sold separately)

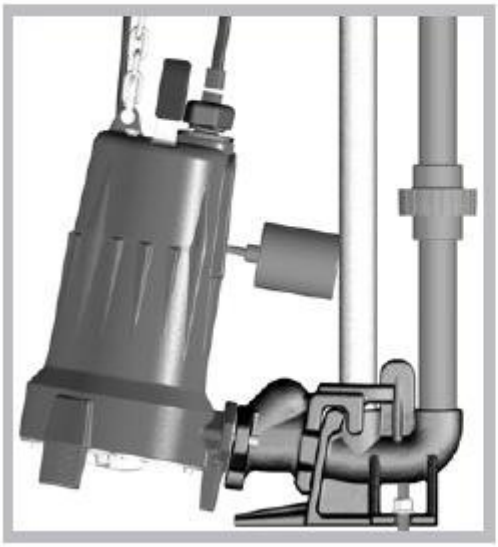

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

PACKAGED SYSTEMS

We can to provide all type of Wastewater Package Systems (Simplex, Duplex and Grinder).
Types:
-SDS-ST Sink Drain System.
-GWP Assembled Wastewater with PV Vortex Pumps.
-Plumber's Wastewater.
-GPGS Grinder Systems.

Basin:
Ribbed polyethylene, Usable capacity 24.8 gal, Dimensions: 23" W x 30" H, Inlet: 4" slip fit hub for fast, easy connection.

PS51 Pump:
Horsepower: 0.5; 115 VOLTS; 1 PH; 13 Amps.

PS41 Pump:
Horsepower: 0.4; 115 VOLTS 1 PH; 10 Amps.

DESCRIPTION	PART NUMBER
PLEASE CALL FOR INFORMATION	

All:
Maximum 2" solids; Insulation Class B; on winding auto reset thermal overload; Rated for continuous duty when fully submerged; 20' power cord.

APPLICATIONS: • Laundry Tray, • Wet Bar Sink, • Air Conditioning or Dehumidifier Condensate, • Residential Dishwashers, • Beautician Sink, • Homes, Rural water Districts, Parks and Dewatering, • Sewage Lift Stations.

SEWAGE

WS_B (Model 3886) and WS_BF (Model 3887BF) Series: Capacity: 185 GPM, TOTAL HEADS: up to 38 Ft TDH; Discharge: 2" NPT. In **BF Series** threaded companion flange extra space as standard.
3" option available but must be ordered separately.
Maximum solids size 2".

- Cast Iron Semi-Open Non-Clog Impeller.
- Cast Iron flanged volute type for maximum efficiency.
- Corrosion Resistant 300 Series Stainless Steel Shaft.
- Designed for Continuous Operation When Fully Submerged.

DESCRIPTION	PART NUMBER
SEWAGE SUBMERSIBLE 1/2 HP 1PH 115V;	WS0511B
SEWAGE SUBMERSIBLE 1/2 HP 1PH 230V	WS0512B
SEWAGE SUBMERSIBLE 1/2 HP 3PH 230V	WS0532B
SEWAGE SUBMERSIBLE 1 HP 1PH 230V	WS1012B
SEWAGE SUBMERSIBLE 1/2 HP 1PH 115V	WS0511BF
SEWAGE SUBMERSIBLE 1/2 HP 1PH 230V	WS0512BF
SEWAGE SUBMERSIBLE 3/4 HP 1PH 230V	WS0712BF
SEWAGE SUBMERSIBLE 1 HP 1PH 230V	WS1012BF
SEWAGE SUBMERSIBLE 1 HP 3PH 230V	WS1032BF

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

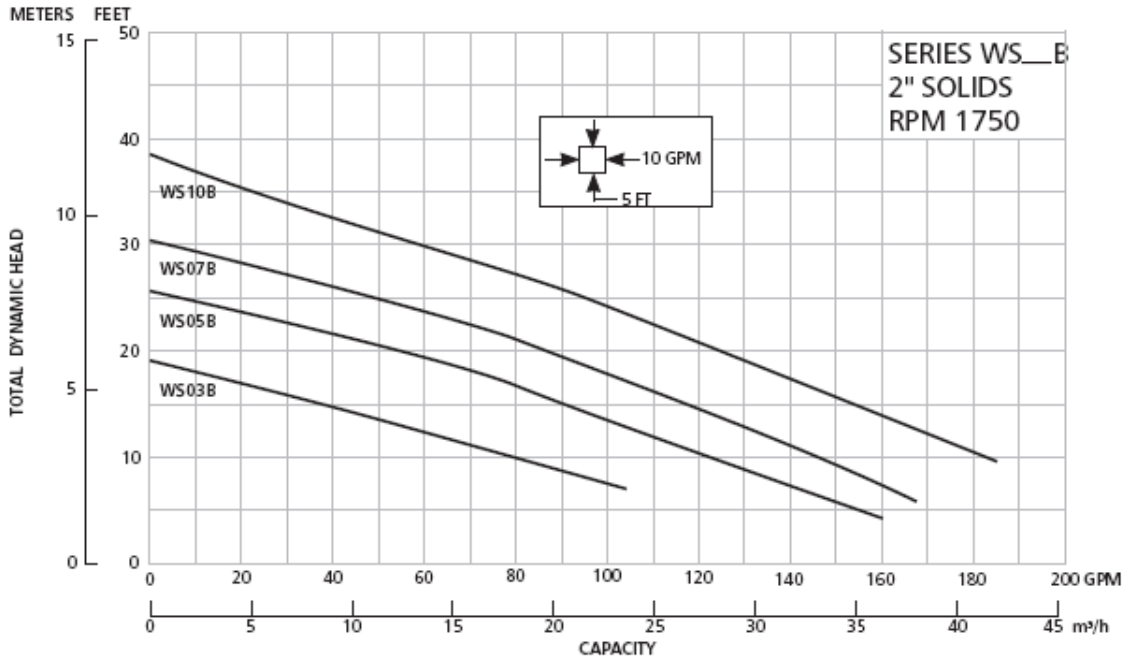

WS_BHF Series (Model 3887BHF): Capacity: 220 GPM, TOTAL HEADS: up to 81 Ft TDH, Discharge: 2" NPT, maximum solids size 2".

- Cast Iron Enclosed, Non Clog Impeller with pump out vanes for mechanical seal protection.
- Corrosion Resistant 300 Series Stainless Steel Shaft.
- Designed for Continuous Operation When Fully Submerged.

DESCRIPTION	PART NUMBER
SEWAGE SUBMERSIBLE 1/2 HP 1PH 115V	WS0511BHF
SEWAGE SUBMERSIBLE 1/2 HP 1PH 230V	WS0512BHF
SEWAGE SUBMERSIBLE 1 HP 1PH 230V	WS1012BHF
SEWAGE SUBMERSIBLE 1 HP 3PH 230V	WS1032BHF
SEWAGE SUBMERSIBLE 1 HP 3PH 460V	WS1034BHF
SEWAGE SUBMERSIBLE 1 1/2 HP 1PH 230V	WS1512BHF
SEWAGE SUBMERSIBLE 1 1/2 HP 3PH 230V	WS1532BHF
SEWAGE SUBMERSIBLE 2 HP 1PH 230V	WS2012BHF
SEWAGE SUBMERSIBLE 2 HP 3PH 230V	WS2032BHF

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

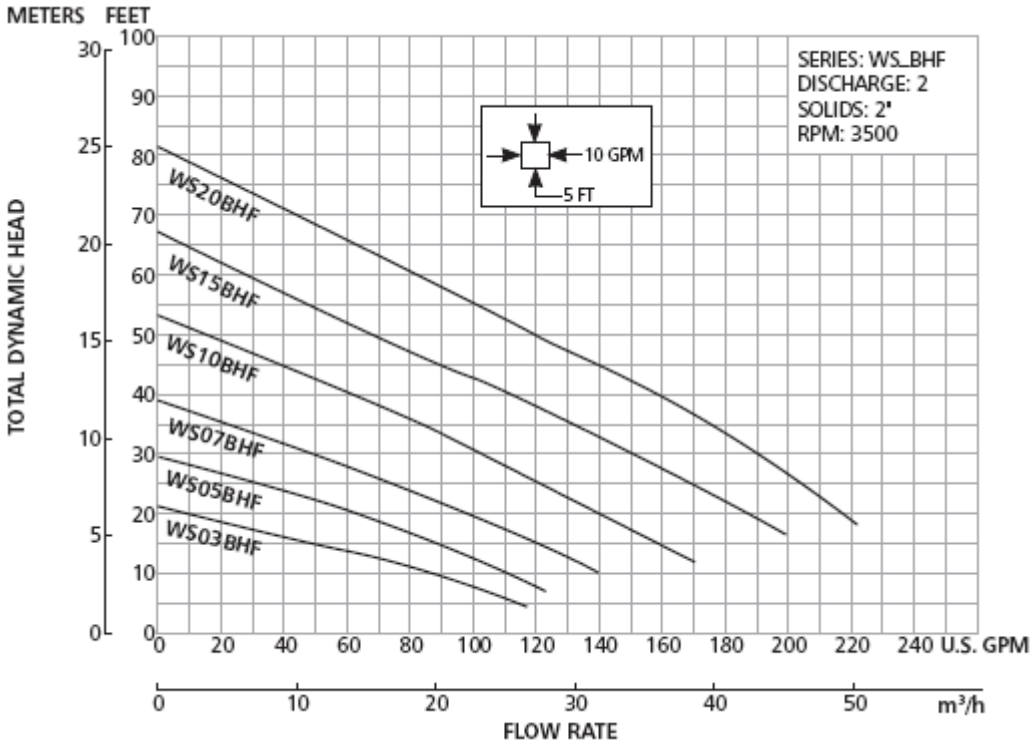

WW05 Series (Model 3872): Capacity: 75 GPM, TOTAL HEADS: up to 18 Ft TDH, Discharge: 2" NPT, maximum solid size 2"

Applications: Homes, Sewage Systems, Dewatering Effluent, Water Transfer, Light Industrial, Commercial Applications.

DESCRIPTION	PART NUMBER
SEWAGE SUBMERSIBLE 1/2 HP 1 PH 115V	WW0511A
SEWAGE SUBMERSIBLE 1/2 HP 1PH 230V	WW0512

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

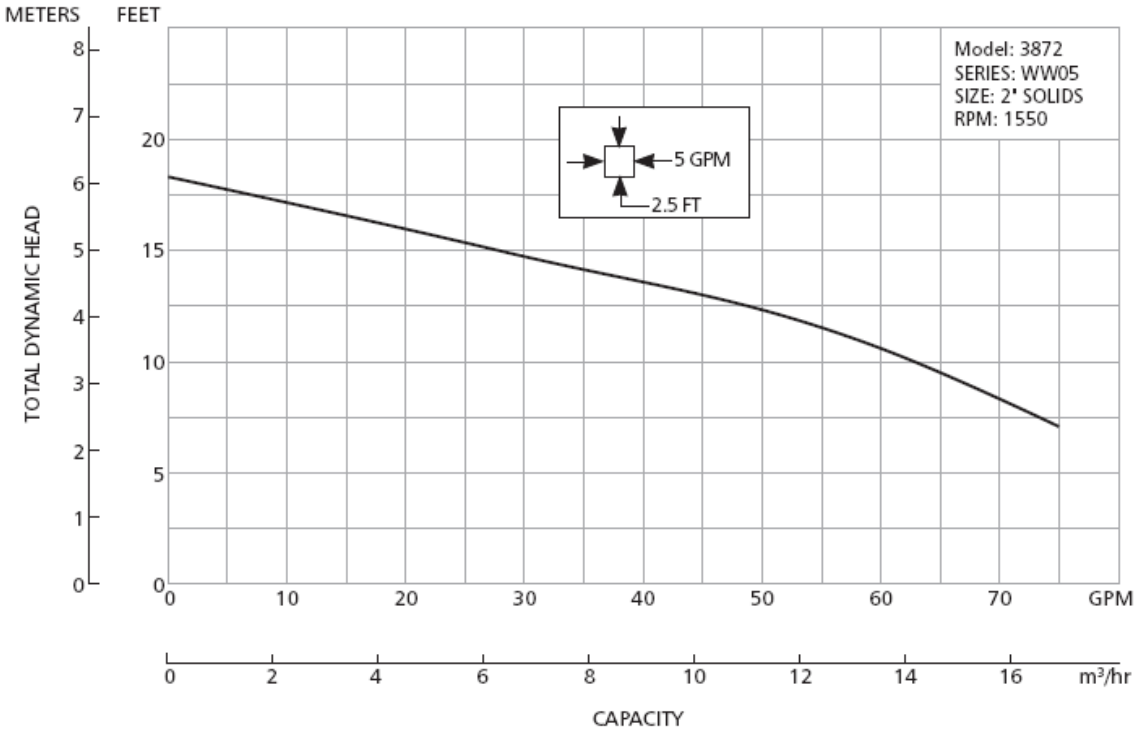

WS_D3 Series (Model 3888D): Capacity: 470 GPM, TOTAL HEADS: up to 65 feet, Discharge: 3" NPT, maximum solid size: 2.5".

Applications: Sewage systems, Flood and pollution control, Dewatering/Effluent.

DESCRIPTION	PART NUMBER
SEWAGE SUBMERSIBLE 3 HP 1 PH 230V	WS3012D3
SEWAGE SUBMERSIBLE 2 HP 3 PH 230V	WS2032D3
SEWAGE SUBMERSIBLE 3 HP 3 PH 230V	WS3032D3
SEWAGE SUBMERSIBLE 5 HP 3 PH 230V	WS5032D3

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

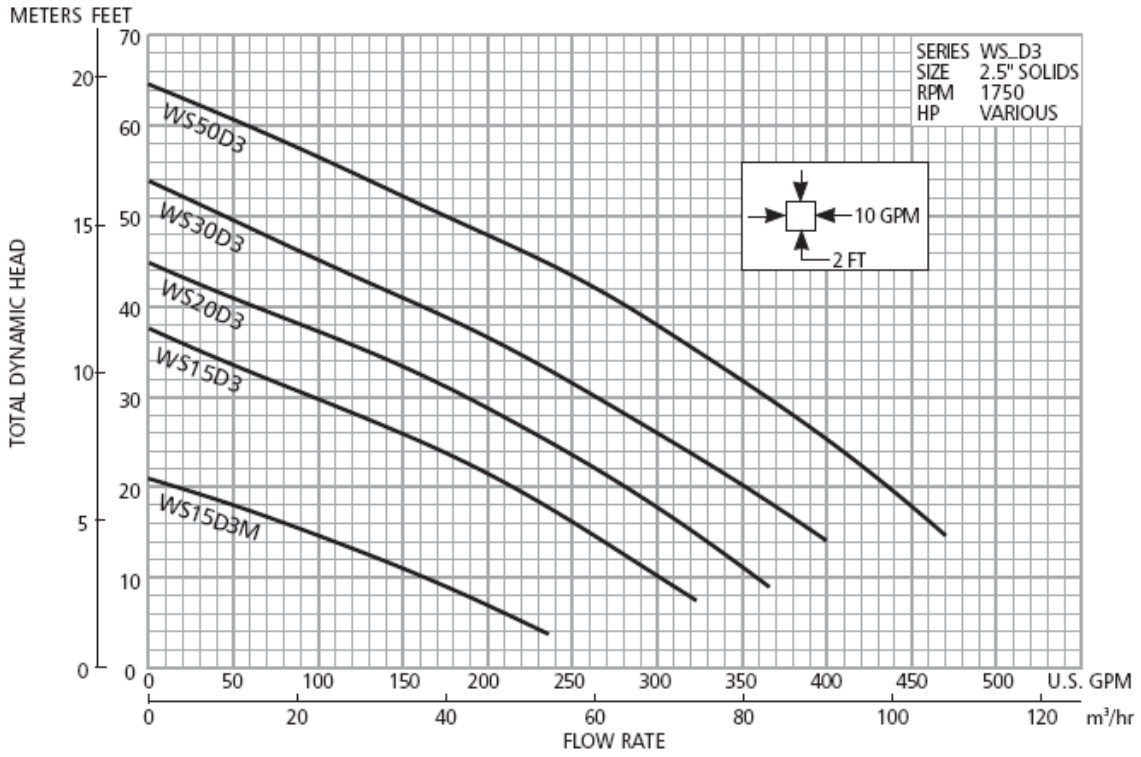

WS_D4 Series (Model 3888D4): Capacity: 620 GPM; TOTAL HEADS: Up to 60 Feet, Discharge: 4" ANSI 125# flanged, Maximum solid size 3".

Applications: Sewage systems, Flood and pollution control, Dewatering/Effluent.

DESCRIPTION	PART NUMBER
SEWAGE SUBMERSIBLE 11/2 HP 3 PH 460V	WS1534D4
SEWAGE SUBMERSIBLE 2 HP 1 PH 230V	WS2012D4
SEWAGE SUBMERSIBLE 3 HP 3 PH 230V	WS3032D4
SEWAGE SUBMERSIBLE 3 HP 3 PH 460V	WS3034D4

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

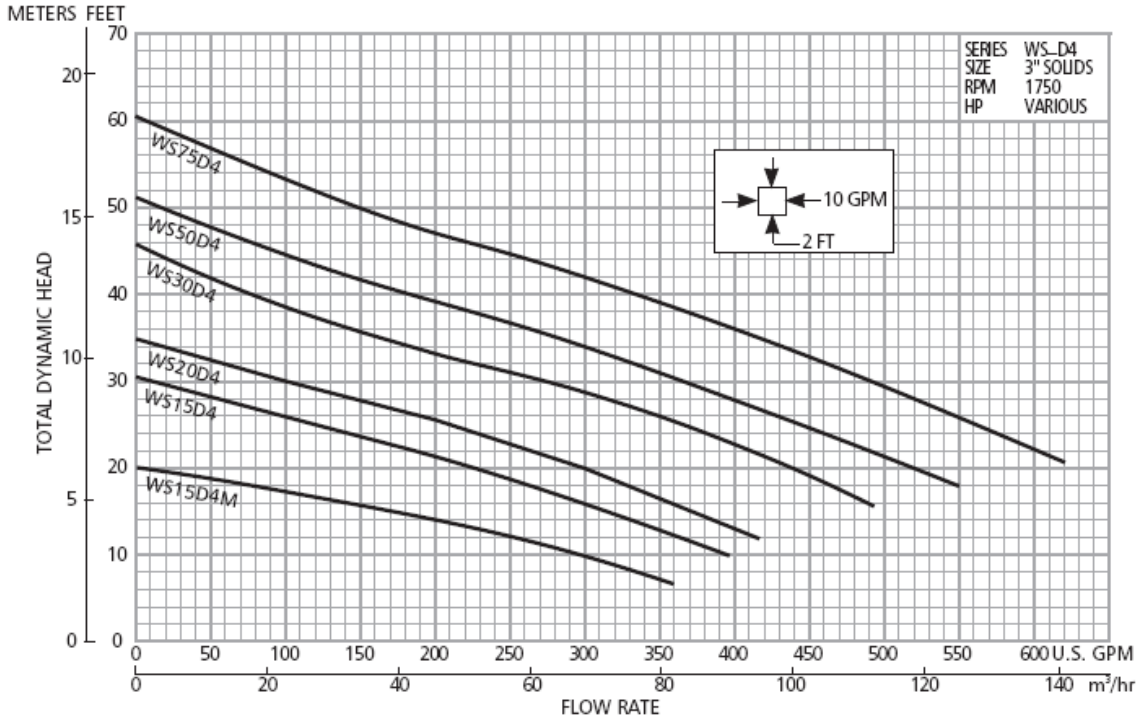

PEDROLLO ... the spring of life

MC DOUBLE CHANNEL Submersible pump Model: Recommended for draining dirty water and sewage in the domestic and civil sectors. They are equipped with a "Double-Channel" stainless steel impeller, which allows the pumping of liquids containing suspended solid bodies with dimensions up to 2 inch and short fibers. They are ideal for pumping drainage water, sewage or waste water for a single dwelling, and for clearing surface or nuisance water even if muddy. These pumps are outstanding in their reliability in fixed installations with automatic operation.

FLOW RATE: 211 GPM, HEAD UP TO 49 ft. BODY: Cast Iron, Submersible Asynchronous Motor.

DESCRIPTION	PART NUMBER
DOUBLE CHANNEL SEWAGE SUBMERSIBLE 1HP 230V 1PH, 2" NPT	MC10C16S

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

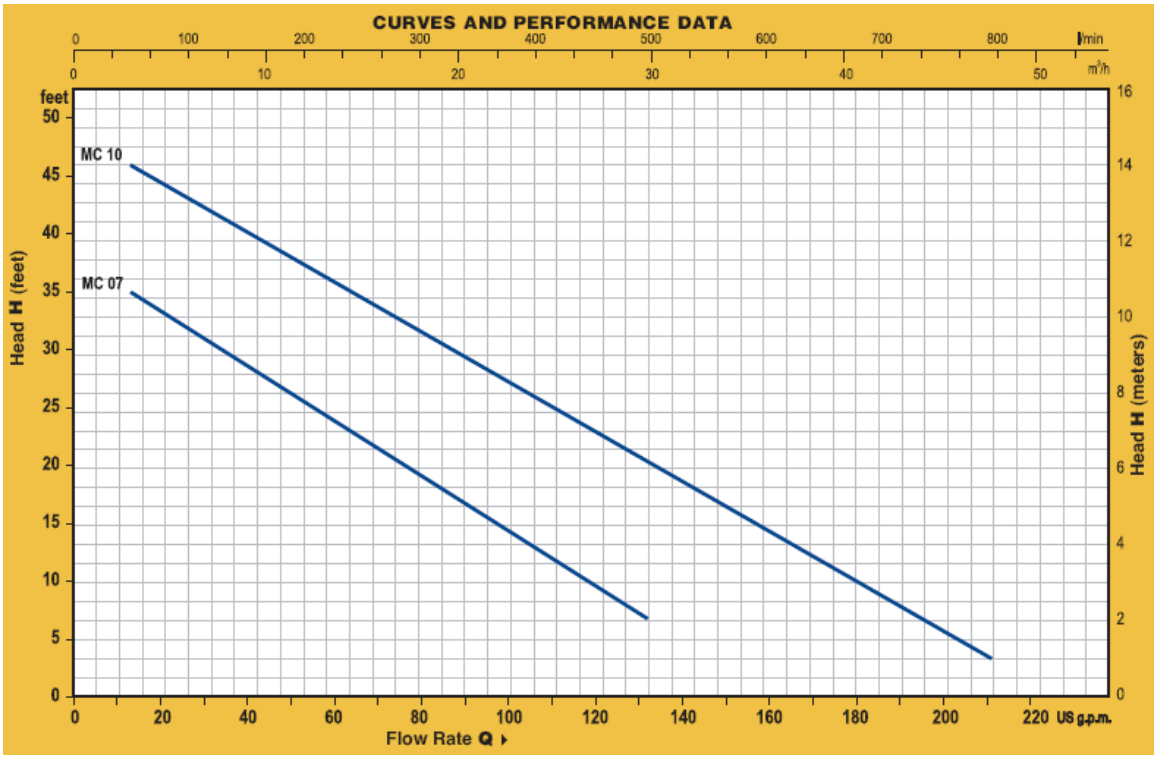

Typical single-phase installation

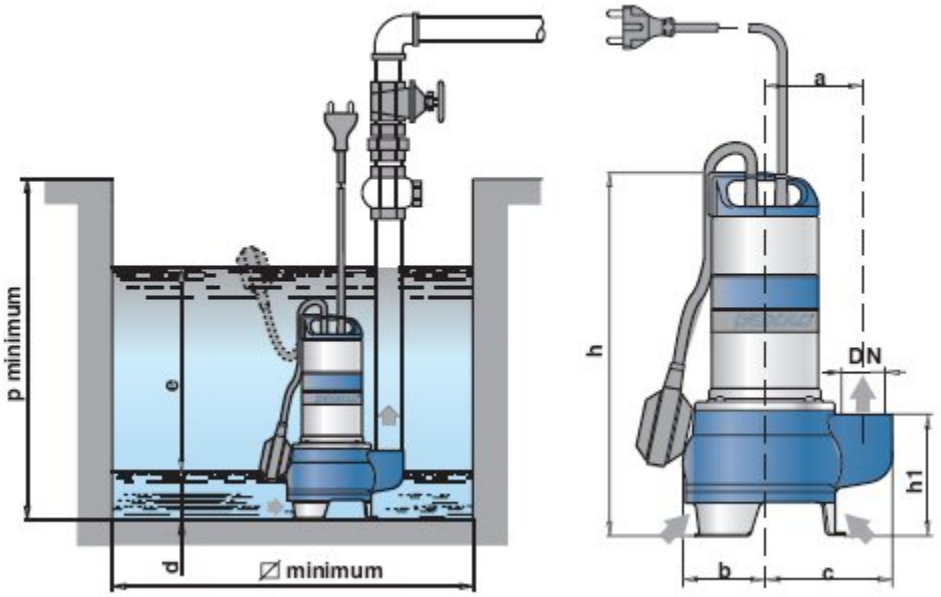

MODEL		DISCH	SOLID	DIMENSIONS INCHES								
1 PH	3 PH	DN	BODIES	a	b	c	h	h1	d	e	p	⊠
MC 07	MC 07	2"	2"	43.3	35.4	59.1	161.4	60.2	21.7	Adjustable	19.7	19.7
MC 10	MC 10			47.2	14.6	64.2	169.3	62.2	25.6			

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com

www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

VX Submersible Pump Model: They are recommended for draining wastewater in the domestic, civil and industrial sectors, in applications where the water contains suspended solids with dimensions up to 2 inch. Their use is recommended for drying flooded areas such as cellars, underground car parks, car washing areas and for emptying cesspits or sewage disposal.

FLOW RATE: 105 GPM, HEAD UP TO 49 ft, BODY: Stainless Steel AISI 304, Submersible Asynchronous Motor.

DESCRIPTION	PART NUMBER
SEWAGE SUBMERSIBLE 1/2HP 115V 1PH, 60 HZ 11/2" NPT	VXH05A16S
SEWAGE SUBMERSIBLE 1HP 230V 1PH, 60 HZ 2" NPT	VX10A16S

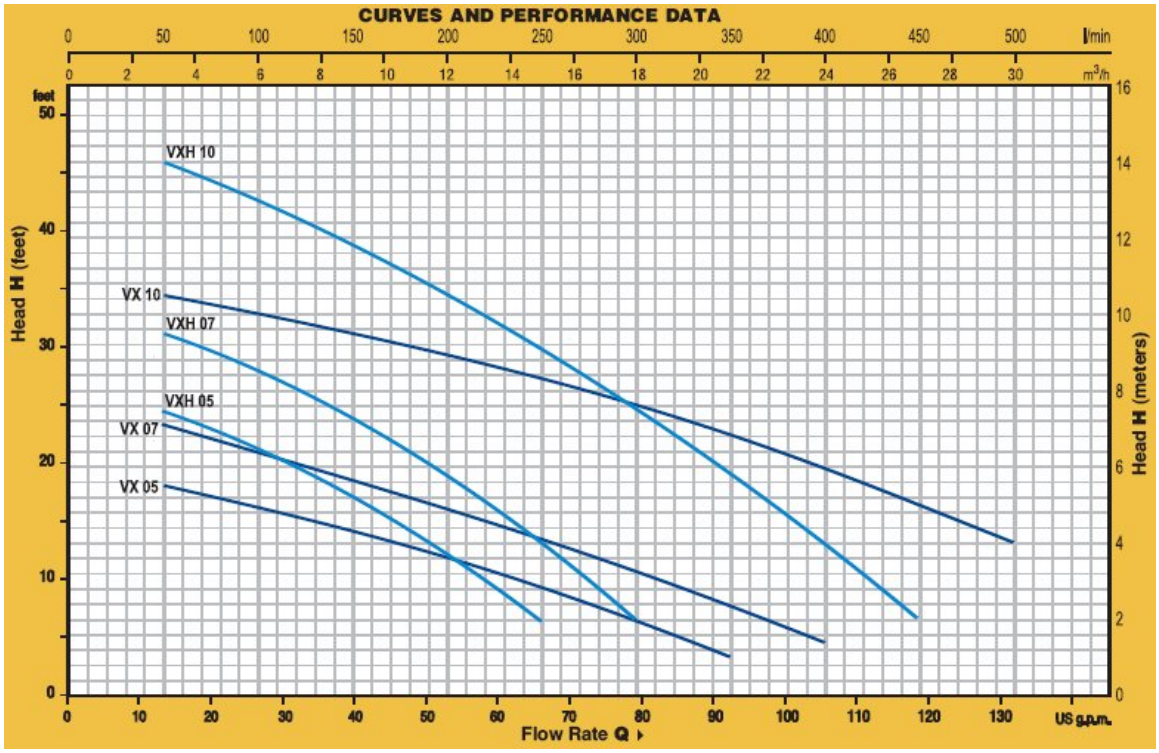

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

Typical single-phase installation

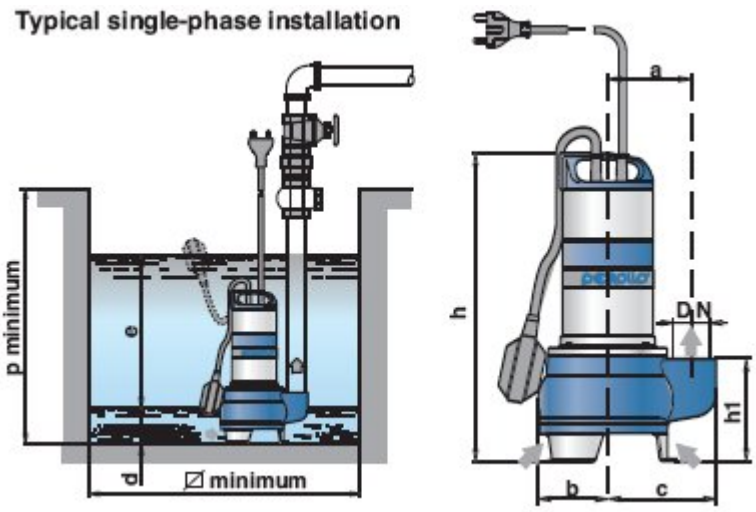

MODEL		DISCH	SOLID	DIMENSIONS INCHES								
1 PH	3 PH	DN	BODIES	a	b	c	h	h1	d	e	p	⌀
VXH 05		1 1/2"	1 1/2"	4.1	3.4	5.4	15.0	4.8	1.6	Adjustable	19.7	19.7
VXH 07	VXH07											
VXH 10	VXH 10			4.3	3.6	5.6	15.7	5.2	2.2			
VX 05		2"	2"		3.5	5.9	16.1	6.0				
VX 07	VX 07			4.7					2.6			
VX 10	VX 10				3.8	6.4	16.9	6.2				

VXC Model: These pumps are made of exceptionally robust heavy-gauge cast iron, resistant to abrasion and long lasting, and have a vortex type impeller. They are suitable for sewage, wastewater and sludge, including water containing solids or mud. They are ideal for sewage installation, tunnels and other excavations, underground car and similar applications.

FLOW RATE: 317 GPM, HEAD UP TO 52 ft, BODY: Cast Iron, Submersible asynchronous, and 2 poles

DESCRIPTION	PART NUMBER
SEWAGE SUBMERSIBLE 2HP 230V 3PH, 60 HZ, 3" NPT	VXC20C36S

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

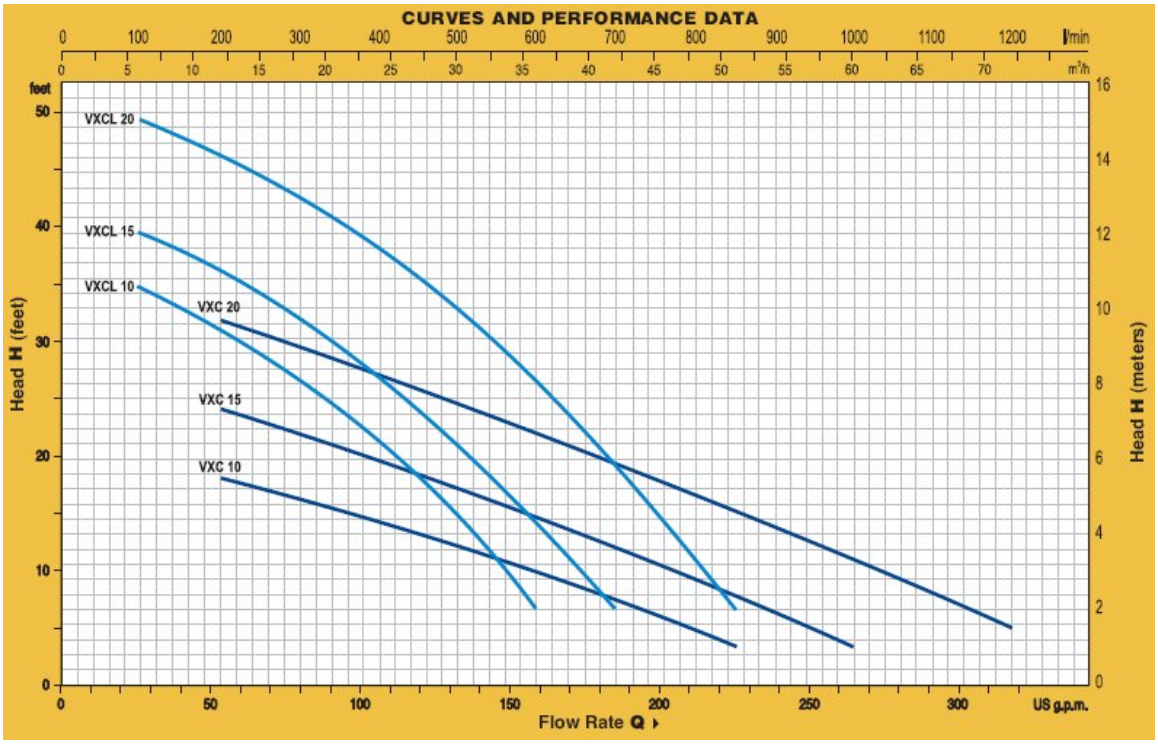

Typical single-phase installation

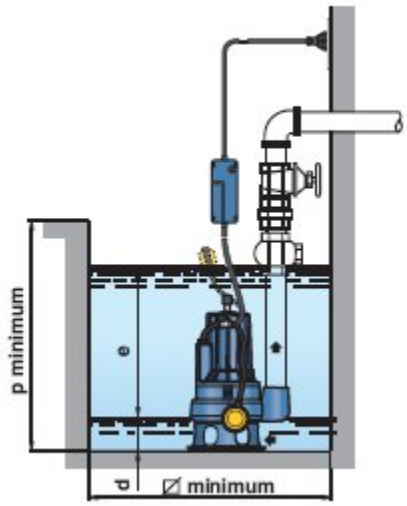

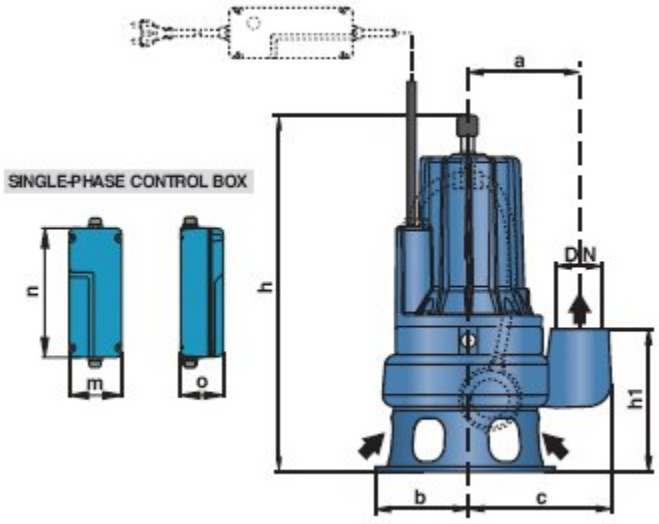

MODEL		DISCH	SOLID	DIMENSIONS INCHES											
1 PH	3 PH	DN	BODIES	a	b	c	h	h1	m	n	o	d	‹	p	☒
VXCL 10	VXCL 10	2 1/2"	2 1/2"	6.4	5.3	8.3	19.3	7.4	3.1	7.8	3.3	2.9	Adjustable	31.4	31.4
VXCL15	VXCL15														
VXCL 20	VXCL20						19.7/19.3								
VXC 10	VXC 10	3"	3"	7.1	5.9	9.4	20.8	9.0				3.3			
VXC 15	VXC 15														
VXC 20	VXC 20						19.7/19.3								

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1 MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102 MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsuppl

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com

www.acepumpandsuppl

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

VALVES

BALL VALVES

BRASS

SWEAT VALVE

• Full port, • forged brass, • Teflon seats, • Blow out proof stem, • handle cast iron

DESCRIPTION	PART NUMBER
BALL VALVE 1/2" SOLDER	100413
BALL VALVE 3/4" SOLDER	759C04
BALL VALVE 1" SOLDER JOMAR	100415
BALL VALVE 11/4" SOLDER	100416
BALL VALVE 11/2" SOLDER	100417
BALL VALVE 2" SOLDER JOMAR	759C08
BALL VALVE 21/2" SOLDER	100419
BALL VALVE 3" SOLDER JOMAR	100420

APPLICATIONS: Residential, commercial, light industrial for water, oil, gas

THREAD VALVE

• Full port, • Forged brass, • Teflon seats, • Blow out proof stem

DESCRIPTION	PART NUMBER
BALL VALVE CHROME 1/2" FP, 600 WOG	600-005TFP
BALL VALVE CHROME 3/4" FP, 600 WOG	600-007TFP
BALL VALVE CHROME 1" FP, 600 WOG	600-010TFP
BALL VALVE CHROME 11/4" FP, 600 WOG	600-012TFP
BALL VALVE CHROME 11/2" FP, 600 WOG	600-015TFP
BALL VALVE CHROME 2" FP, 600 WOG	600-020TFP
BALL VALVE CHROME 21/2" FP, 600 WOG	600-025TFP
BALL VALVE CHROME 3" FP, 600 WOG	600-030TFP
BALL VALVE CHROME 4" FP, 600 WOG	600-040TFP

APPLICATIONS: Residential, commercial, light industrial for water, oil, gas

PVC

SLIP

• PVC ball valves are constructed of quality materials using virgin schedule 80, • PVC rated 150 PSI at 72 degree water temperature, • full port flow opening, quarter turn operation.

DESCRIPTION	PART NUMBER
BALL VALVE PVC SLIP 1/2"	9120
BALL VALVE PVC SLIP 3/4"	400-007S
BALL VALVE PVC SLIP 1"	770S05N
BALL VALVE PVC SLIP 11/4"	770S06N
BALL VALVE PVC SLIP 11/2"	9124
BALL VALVE PVC SLIP 2"	770S08N

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.
created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
BALL VALVE PVC SLIP 21/2”	770S09N
BALL VALVE PVC SLIP 3”	400-030S
BALL VALVE PVC SLIP 4”	400-040S

THREAD

• Ball valve threaded are constructed of plastic materials to ensure corrosion resistance, • The large port allows maximum flow with minimum pressure loss, • The model 770 may be used on schedule 40 or 80 pipe.

DESCRIPTION	PART NUMBER
BALL VALVE PVC 1/2" THREAD	9130T
BALL VALVE PVC 3/4" THREAD	401-007T
BALL VALVE PVC 1” THREAD	9132T
BALL VALVE PVC 11/4” THREAD	9133T
BALL VALVE PVC 11/2” THREAD	9134T
BALL VALVE PVC 2” THREAD	9135T
BALL VALVE PVC 21/2” THREAD	401-025T
BALL VALVE PVC 3” THREAD	401-030T
BALL VALVE PVC 4” THREAD	401-040T

BUTTERFLY VALVES

LUG STYLE VALVE

*B3-RLO-LEVER OPERATED NICKEL PLATED DUCTILE IRON DISC-BUNA N LINER
**B3-RLOS-LEVER OPERATED 304 STAINLESS STEEL DISC-EPDM LINERS
***B3-RLOAB- LEVER OPERATED-ALUMINUM BRONZE DISC-BUNA N LINER

DESCRIPTION	PART NUMBER
BUTTERFLY VALVE B3-RLO10	B3-RLO10
BUTTERFLY VALVE B3-RLO12	B3-RLO12
BUTTERFLY VALVE B-RLO2.5	B3-RLO2.5
BUTTERFLY VALVE B-RLO2 CI	B3-RLO2
BUTTERFLY VALVE B-RLO3 CI	B3-RLO3
BUTTERFLY VALVE B5-RLO4	B5-RLO4
BUTTERFLY VALVE B3-RLO5	B3-RLO5
BUTTERFLY VALVE B3-RLO6	B3-RLO6
BUTTERFLY VALVE B3-RLO8	B3-RLO8

THROUGH BOLT VALVE

B3-LGL-LEVER OPERATED NICKEL PLATED DUCTILE IRON DISC-BUNA N LINER
**B3-LGLS-LEVER OPERATED 304 STAINLESS STEEL DISC-EPDM LINER
***B3-LGLAB- LEVER OPERATED-ALUMINUM BRONZE DISC-BUNA N LINER

DESCRIPTION	PART NUMBER
BUTTERFLY VALVE B-5S-LUG10	B5-LGL10S
BUTTERFLY VALVE B-5S-LUG12	B5-LGL12S

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

DESCRIPTION	PART NUMBER
BUTTERFLY VALVE B-5 LUG2.5	B5-LGL2.5S
BUTTERFLY VALVE B-5S-LUG2	B5-LGL2S
BUTTERFLY VALVE B-5-LUG3	B5-LGL3S
BUTTERFLY VALVE B5-LGL4	B5-LGL4S
BUTTERFLY VALVE B-5S-LUG5	B5-LGL5S
BUTTERFLY VALVE B5-LGL6	B5-LGL6S
BUTTERFLY VALVE B-5S-LUG8	B5-LGL8S

CHECK VALVES

BRASS, CAST IRON, AND PVC SIZES - 1/4-4

BRASS

SPRING

STRATAFLO No. 300 Check Valves operate on the same unique principle as the Strataflo Foot Valves; but, since they are made to operate in any position, a sensitive spring has been added to close the poppet automatically.
Silicone-treated Buna-S rubber poppets open easily and are more durable than O-rings. Being flexible, they cannot leak.
Strataflo Check Valves are noiseless and will operate on very low pressures. Cracking pressure is approximately 1 lb., not adjustable.

ENVIRO VALVE body is cast from an unleaded alloy with threaded female X female connection. This valve features a non-spin acetal (1/2"-2"), or unleaded bronze (21/2"-4") poppet, NITRILE (Buna-N) seal and stainless steel spring.

DESCRIPTION	PART NUMBER
ENVIRO CHECK VALVE TXT 1/2", Press. Max: 400 PSI, Temp. Max: 180º F (80C).	4029E
ENVIRO CHECK VALVE TXT 3/4", Press. Max: 400 PSI, Temp. Max: 180º F (80C).	4030E
ENVIRO CHECK VALVE TXT 1", Press. Max: 400 PSI, Temp. Max: 180º F (80C).	4031E
ENVIRO CHECK VALVE TXT 11/4", Press. Max: 400 PSI, Temp. Max: 180º F (80C).	4032E
ENVIRO CHECK VALVE TXT 11/2", Press. Max: 400 PSI, Temp. Max: 180º F (80C).	4033E
ENVIRO CHECK VALVE TXT 2", Press. Max: 400 PSI, Temp. Max: 180º F (80C).	4034E
ENVIRO CHECK VALVE TXT 21/2", Press. Max: 400 PSI, Temp. Max: 180º F (80C).	4035E
ENVIRO CHECK VALVE TXT 3", Press. Max: 400 PSI, Temp. Max: 180º F (80C).	4036E
ENVIRO CHECK VALVE TXT 4", Press. Max: 400 PSI, Temp. Max: 180º F (80C).	4037E
STRATAFLO BRASS CHECK VALVE 3/8", Press. Max: 200 PSI, Temp Max: 300º F	400-038**
STRATAFLO BRASS CHECK VALVE 1/2", Press. Max: 200 PSI, Temp Max: 300º F	400-050**
STRATAFLO BRASS CHECK VALVE 3/4", Press. Max: 200 PSI, Temp. Max: 225º F	300-075*
STRATAFLO BRASS CHECK VALVE 1", Press. Max: 200 PSI, Temp. Max: 225º F	300-100*
STRATAFLO BRASS CHECK VALVE 11/4", Press. Max: 200 PSI, Temp. Max: 225º F	300-125*
STRATAFLO BRASS CHECK VALVE 11/2", Press. Max: 200 PSI, Temp. Max: 225º F	300-150*
STRATAFLO BRASS CHECK VALVE 2", Press. Max: 200 PSI, Temp. Max: 225º F	300-200*
STRATAFLO BRASS CHECK VALVE 21/2", Press. Max: 200 PSI, Temp. Max: 225º F	300-250*
STRATAFLO BRASS CHECK VALVE 3", Press. Max: 200 PSI, Temp. Max: 225º F	300-300*

*** Not for air compressor service.**
**** Used in low-pressure steam and fuel systems.**

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

SWEAT

• ISO-9002, • 300 WOG-150 SWP, • Heavy-duty bronze body, • Solder ends comply with ANSI b16.18, • Sizes 1/4- 3

DESCRIPTION	PART NUMBER
SWING CHECK VALVE 1/2" SLIP, 200-PSI WOG, 125-PSI SWP.	521C03
SWING CHECK VALVE 3/4" SLIP, 200-PSI WOG, 125-PSI SWP.	521C04
SWING CHECK VALVE 1" SLIP, 200-PSI WOG, 125-PSI SWP.	521C05
SWING CHECK VALVE 11/4" SLIP, 200-PSI WOG, 125-PSI SWP.	521C06
SWING CHECK VALVE 11/2" SLIP, 200-PSI WOG, 125-PSI SWP.	521C07
SWING CHECK VALVE 2" SLIP, 200-PSI WOG, 125-PSI SWP.	521C08
SWING CHECK VALVE 3" SLIP, 200-PSI WOG, 125-PSI SWP.	521C10
SWING CHECK VALVE 4" SLIP, 200-PSI WOG, 125-PSI SWP.	521C11

APLICATIONS: Commercial, light industrial for water, oil, gas or steam.

Y SWING SWEAT

Jomar's S-511 Y-pattern swing check valves have excellent flow characteristics and can be installed in either vertical or horizontal positions.
Screwed cap, swing-type disc, integral PTFE seat and complies with MSS SP-80

- 300 PSI / 150 WSP
- Constructed of 85-5-5-5 bronzes
- Vertical or Horizontal positions
- PTFE seat
- MSS SP-80

DESCRIPTION	PART NUMBER
CHECK VALVE Y 1" SOLDER CXC S-511 JOMAR 300PSI / 150 WSP	105405
CHECK VALVE Y 11/4" SOLDER CXC S-511 JOMAR 300PSI / 150 WSP	105406
CHECK VALVE Y 11/2" SOLDER CXC S-511 JOMAR 300PSI / 150 WSP	105407
CHECK VALVE Y 2" SOLDER CXC S-511 JOMAR 300PSI / 150 WSP	105408
CHECK VALVE Y 21/2" SOLDER CXC S-511 JOMAR 300PSI / 150 WSP	105409
CHECK VALVE Y 3" SOLDER CXC S-511 JOMAR 300PSI / 150 WSP	105410

SWING THREADED

ISO-9002, 200 WOG-125 SWP
Cast brass body, swing type, neoprene seat
Threaded ends comply w/ ANSI b2.1 3/8- 4
Solder ends comply w/ ANSI b16.18 1/2- 2
Valves tested in accordance w/ mss-sp-90

DESCRIPTION	PART NUMBER
BRASS SWING CHECK VALVE THREADED 1/2 "	640-005T
BRASS SWING CHECK VALVE THREADED 3/4 "	640-007T
BRASS SWING CHECK VALVE THREADED 1"	640-010T
BRASS SWING CHECK VALVE THREADED 1 1/2 "	640-015T
BRASS SWING CHECK VALVE THREADED 1 1/4 "	640-012T
BRASS SWING CHECK VALVE THREADED 2"	640-020T
BRASS SWING CHECK VALVE THREADED 2 1/2 "	640-025T
BRASS SWING CHECK VALVE THREADED 3"	640-030T
BRASS SWING CHECK VALVE THREADED 4"	640-040T

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

VALVES

FLANGED

SWING

Cast iron body flanged connection ANSI 125.
Bronze trim with stainless steel shaft.
Temp max: 180þ f (80c)
Pressure max: 175 PSI: 2-12, 150 PSI: 14-30

DESCRIPTION	PART NUMBER
CHECK VALVE FLANGED 2”	820-020F
CHECK VALVE FLANGED 3”	120F10
CHECK VALVE FLANGED 4”	820-040F
CHECK VALVE FLANGED 5”	820-050F
CHECK VALVE FLANGED 6”	820-060F

FOOT

Available in cast bronze or cast brass body and poppet.
NBR "o" ring seal (NITRILE BUNA-N)
Stainless steel screen

DESCRIPTION	PART NUMBER
FOOT VALVE 1/2 “, Press. Max: 200 PSI, Temp. Max: 180º F (80C).	17YBFV050
FOOT VALVE 3/4 “, Press. Max: 200 PSI, Temp. Max: 180º F (80C).	17YBFV075
FOOT VALVE 1 “, Press. Max: 200 PSI, Temp. Max: 180º F (80C).	17YBFV100
FOOT VALVE 1 1/4 “, Press. Max: 200 PSI, Temp. Max: 180º F (80C).	17YBFV125
FOOT VALVE 1 1/2 “, Press. Max: 200 PSI, Temp. Max: 180º F (80C).	17YBFV150
FOOT VALVE 2", Press. Max: 200 PSI, Temp. Max: 180º F (80C).	17YBFV200

PVC

SPRING

Maintenance free operation tapered valve body design and enlarged valve chamber reduces chatter and turbulence. Pipe sizes 1/2 to 3
200 PSI static pressure rating @ 72ºf
Swimming pools, hot tubs, spas, and irrigation

DESCRIPTION	PART NUMBER
PVC SPRING CHECK VALVE SXS 1/2"	1011-05
PVC SPRING CHECK VALVE SXS 3/4"	1011-07
PVC SPRING CHECK VALVE SxS 1”	1011-10
PVC SPRING CHECK VALVE SXS 11/4”	1011-12
PVC SPRING CHECK VALVE SXS 11/2”	1011-15
PVC SPRING CHECK VALVE SXS 2”	KC-2000-S
PVC SPRING CHECK VALVE SXS 21/2”	1011-25
PVC SPRING CHECK VALVE SXS 3”	1011-30

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

SWING

DESCRIPTION	PART NUMBER
PVC SWING CHECK VALVE SXS 1/2"	1520-05
PVC SWING CHECK VALVE SXS 3/4"	1520-07
PVC SWING CHECK VALVE SXS 1”	1520-10
PVC SWING CHECK VALVE SXS 11/4”	KCS-1250-S
PVC SWING CHECK VALVE SXS 11/2”	KCS-1500-S
PVC SWING CHECK VALVE SXS 2”	KCS-2000-S
PVC SWING CHECK VALVE SXS 3”	KCS-3000-S
PVC SWING CHECK VALVE SXS 4”	KCS-4000-S

THREADED

DESCRIPTION	PART NUMBER
PVC SPRING CHECK VALVE TXT 1/2"	1001-05
PVC SPRING CHECK VALVE TxT 3/4"	1001-07
PVC SPRING CHECK VALVE TXT 1”	1001-10
PVC SPRING CHECK VALVE TxT 11/4”	1001-12
PVC SPRING CHECK VALVE TXT 11/2”	1001-15
PVC SPRING CHECK VALVE TXT 2”	1001-20
PVC SPRING CHECK VALVE TXT 21/2”	1001-25
PVC SPRING CHECK VALVE TXT 3”	1001-30

SPLIT DISC

SPLIT DISC check valve is a precision engineered, fully developed product at the forefront of pipe system technology. Sure Flow Check can be installed with confidence into offshore or onshore pipeline systems on product or service lines, wherever non-return protection is required.
Valve meets API 594 wafer check valve standard (except face-to-face dimensions of
ANSI 125 cast iron valves from 2-1/2" to 12" in which case they meet the Industry Standard).

DESCRIPTION	PART NUMBER
CHECK VALVE WAFER 2” SPLIT DISC.	CVC-2
CHECK VALVE WAFER 2-1/2" DOUBLE WING.	CVC-21/2
CHECK VALVE WAFER 3" CVC DOUBLE WING.	CVC-3
CHECK VALVE WAFER 4" CVC DOUBLE WING.	CVC-4
CHECK VALVE WAFER 6” DOUBLE WING	CVC-6

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com ***www.acepumpandsupply.***

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

WAFFER

SILENT Check Valve is designed to close before the pump stops completely. This prevents flow reversal, which eliminates water hammer and system surges associated with valve closure.

• Quiet Operation, • Guided Discs, • Vertical or Horizontal Installation, • Sizes 2" thru 12 "

DESCRIPTION	PART NUMBER
SILENT CHECK VALVE 2 " WAFER	SC-2
SILENT CHECK VALVE 2.5" WAFER	SC-2.5
SILENT CHECK VALVE 3" WAFER	SC-3
SILENT CHECK VALVE 4" WAFER	SC-4

GATE VALVES

FLANGED

105U RESILIENT

• Gate Valve-Flanged Ends, • 175 CWP-Max. Temp. 140° F, • U.L. Listed / F.M. Approved
• N.Y.C. Approved (MEA257), • 3 Bosses w/1 Tapped and Plugged, • Fusion Bonded Epoxy Coating
• Outside Screw & Yoke Rising Stem, • Resilient Wedge, • Sizes 2-1/2" - 12"

APPLICATIONS:
Potable Water Systems, Backflow Isolation Valves, Fireline Loops

DESCRIPTION	PART NUMBER
GATE VALVE CAST IRON. 21/2" FLANGED	105U09
GATE VALVE CAST IRON. 3" FLANGED	105U10
GATE VALVE CAST IRON. 4" FLANGED	105U11
GATE VALVE CAST IRON. 6" FLANGED	105U13
GATE VALVE CAST IRON. 8" FLANGED	105U14

10RW RESILIENT

• Gate Valve-Flanged Ends, • 200 CWP-Max. Temp. 140 Deg. F, • C.I. Body w/3 Bosses w/1 Tapped & Plugged, • Resilient Wedge, • Non Rising 304 S.S. Stem, • Full Port Flow, • Epoxy Coating, • ASTM A126 Class B, • Flanged Ends Conform with ANSI B16.1, • Sizes 2" - 8"

APPLICATIONS:
Irrigation, Potable Water, Turf, Golf Course, Water Distribution Service & Feed Line, Sewage Disposal.

DESCRIPTION	PART NUMBER
GATE VALVE CAST IRON 2" FLANGED	10RW08
GATE VALVE CAST IRON 3" FLANGED	10RW10
GATE VALVE CAST IRON 4" FLANGED	10RW11
GATE VALVE CAST IRON 6" FLANGED	10RW13
GATE VALVE CAST IRON 8" FLANGED	10RW14

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

VALVES

THREADED

ISO 9002, 200 wog-125 SWP, threaded ends comply with ANSI bi.20.1
Bronze body, rising stem, screwed bonnet, integral hard seat
Cast iron handle
Sizes 1/4- 2

DESCRIPTION	PART NUMBER
GATE VALVE BRASS 1/2"	620-005T
GATE VALVE BRASS 3/4"	620-007T
GATE VALVE BRASS 1"	620-010T
GATE VALVE BRASS 11/4"	620-012T
GATE VALVE BRASS 11/2"	620-015T
GATE VALVE BRASS 2"	620-020T
GATE VALVE BRASS 2 1/2"	620-025T
GATE VALVE BRASS 3"	620-030T
GATE VALVE BRASS 4"	620-040T

PRESSURE REDUCE VALVE

AMES valves are used to control pressure in a wide variety of applications.
Whether pressure reducing, pressure relief/sustaining, surge anticipation or a special combination, the AMES valve will maintain the desired set point to close tolerances, regardless

910-01 CV

DESCRIPTION	PART NUMBER
PRESSURE REDUCING VALVE AMES 2"	910GD-02-FLG
PRESSURE REDUCING VALVE AMES 11/2"	910GD-11/2-FLG
PRESSURE REDUCING VALVE AMES 21/2"	910GD-21/2-FLG
PRESSURE REDUCING VALVE AMES 3"	910GD-03-FLG
PRESSURE REDUCING VALVE AMES 4"	910GD-04-FLG

CLA-VAL

The CLA-VAL Model 90-01 (Full Internal Port) automatically reduces a higher inlet pressure to a steady lower downstream pressure, regardless of changing flow rate and/or varying inlet pressure. This valve is an accurate, pilot-operated regulator capable of holding downstream pressure to a predetermined limit. When downstream pressure exceeds the pressure setting of the control pilot, the main valve close drip-tight.

DESCRIPTION	PART NUMBER
CLA-VAL 11/2" GLOBE PATTERN SCREWED	90-01-2823D
CLA-VAL 2" ANGLE PATTERN 150LB FLANGE	90-01-2582F
CLA-VAL 2" GLOBE PATTERN SCRENED	90-01-2824B
CLA-VAL 21/2 ANGLE PATTERN 150LB FLANGE	90-01-2567G
CLA-VAL 21/2 GLOBE PATTERN 150LB FLANGE	90-01-2766E
CLA-VAL 21/2 GLOBE PATTERN SCRENED	90-01-2963H
CLA-VAL 3" GLOBE PATTERN 150LB	90-01-2664B

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

PRESSURE RELIEF VALVE

DESCRIPTION	PART NUMBER
PRESS RELIEF VALVE 1/2" THREAD, 75 PSI, TEMP. MAX: 140ºF (60 C)	RVHD05
PRESS RELIEF VALVE 3/4" THREAD, 75 PSI, TEMP. MAX: 140ºF (60 C)	RVHD07
PRESS RELIEF VALVE 1" THREAD, 75 PSI, TEMP. MAX: 140ºF (60 C)	RVHD10

PRESSURE VACUUM BREAKER

Anti-siphon pressure vacuum breakers series 800M4QT is designed to prevent back-siphonage of contaminated water into a potable water supply. The disc floats and check valve are suitable for temps. up to 140°f. the resilient sealing float o-ring and the valve is ideally suitable for irrigation systems, industrial process water systems and other continuous pressure piping system applications where the water enters the equipment at or below its flood rim.

DESCRIPTION	PART NUMBER
PRESSURE V. BREAKER 1” (WATTS) SERIES 800M4 QT PVB.	0388002
PRESSURE V. BREAKER 11/4” (WATTS) SERIES 800M4 QT PVB.	0387126
PRESSURE V. BREAKER 11/2” (WATTS) SERIES 800M4 QT PVB.	0387114
PRESSURE V. BREAKER 2” (WATTS) SERIES 800M4 QT PVB.	0387122
PRESSURE VACUUM BREAKER DOUBLE CK-VALVE 1" WATTS	4010599T
PRESSURE VACUUM BREAKER DOUBLE CK-VALVE 11/4” WATTS	0062681
PRESSURE VACUUM BREAKER DOUBLE CK-VALVE 11/2” WATTS	0062616
PRESSURE VACUUM BREAKER DOUBLE CK-VALVE 2" WATTS	40108AZT

ACE PUMP AND SUPPLY

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com ***www.acepumpandsupply.***

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

Blank Page

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

ABOVE NEMA

DESCRIPTION	PART NUMBER
PLEASE CALL FOR INFORMATION	

COMPRESSOR DUTY

A.O.SMITH

Ball Bearing • 60 Hz • 40^0 C Ambient • Class B or F insulated • Continuous Duty • Open Construction • Rigid Base.

1 PHASE

DESCRIPTION	PART NUMBER
2 SPL HP 3600 RPM 115/230V FR56 1PH DIPPROOF RIGID.	B381
3 SPL HP 3600 RPM 115/230V FR56 1PH DIPPROOF RIGID.	B383
5 SPL HP 3600 RPM 208/230V FR56 1PH DIPPROOF RIGID	B385

WEG

115/208-230v (single-phase) 208-230/460v (three-phase) with manual overload protection (single-phase) start capacitor (single-phase)

1 PHASE

DESCRIPTION	PART NUMBER
WEG 11/2 HP 3600 RPM FRAME 56	00156OS1BCDD56
WEG 2 HP 3600 RPM FRAME 56	00236OS1BCDD56
WEG 3 HP 3600 RPM FRAME 56	00336OS1BCDF56
WEG 5 HP 3600 RPM FRAME 56	00536OS1CCDG56

CRUSHER DUTY

WEG crusher duty motors are specifically designed to meet the demanding requirements of the rock crushing industry. FC200 grade cast iron, provides superior strength and heat dissipation, and 4140 high-strengthen steel shafts keep the motor running when other fail.

DESCRIPTION	PART NUMBER
PLEASE CALL FOR INFORMATION	

6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.
created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

EXPLOSION PROOF

WEG explosion proof motors are suitable for applications requiring UL or CSA certification for hazardous locations. Thermally protected with thermostats, all motors manufactured are submitted to hydrostatic as well as other routine testing at the factory to ensure compliance to the required specifications.

DESCRIPTION	PART NUMBER

PLEASE CALL FOR INFORMATION

GENERAL PURPOSE

Severe duty high efficiency motors are designed to meet or exceed all epact requirements for energy efficiency as defined by the doe.

THREE PHASE

TEFC

DESCRIPTION	PART NUMBER
1 HP 3600 RPM 3PH 208-230/460V 143T FR.	00136EP3E143T
1 HP 1800 RPM 3PH 208-230/460V 143T FR.	00118EP3E143T
1.5 HP 3600 RPM 3PH 208-230/460V 143T FR	00156EP3E143T
1.5 HP 1800 RPM 3PH 208-230/460V 145T FR	00158EP3E145T
2 HP 3600 RPM 3PH 208-230/460V 145T FR	00236EP3E145T
2 HP 1800 RPM 3PH 208-230/460V 145T FR.	00218EP3E145T
3 HP 3600 RPM 3PH 208-230/460V 182T FR	00336EP3E182T
3 HP 1800 RPM 3PH 208-230/460V 182T FR	00318EP3E182T
5 HP 3600 RPM 3PH 208-230/460V 184T FR	00536EP3E184T
5 HP 1800 RPM 3PH 208-230/460V 184T FR.	00518EP3E184T
7.5 HP 3600 RPM 3PH 208-230/460V 184T FR	00736EP3E184T
7.5 HP 1800 RPM 3PH 208-230/460V 213T FR	00718EP3E213T
10 HP 3600 RPM 3PH 208-230/460V 215T FR	01036EP3E215T
10 HP 1800 RPM 3PH 208-230/460V 215T FR	01018EP3E215T
15 HP 3600 RPM 3PH 208-230/460V 215T FR.	01536EP3E215T
15 HP 1800 RPM 3PH 208-230/460V 254T FR	01518EP3E254T
20 HP 3600 RPM 3PH 208-230/460V 256T FR	02036EP3E256T
20 HP 1800 RPM 3PH 208-230/460V 256T FR	02018EP3E256T
25 HP 3600 RPM 3PH 208-230/460V 284TS FR	02536EP3E284TS
25 HP 1800 RPM 3PH 208-230/460V 284TS FR	02518EP3E284TS
30 HP 3600 RPM 3PH 208-230/460V 286TS FR	03036EP3E286TS
30 HP 1800 RPM 3PH 208-230/460V 286TS FR	03018EP3E286TS

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

HVAC MOTORS

BLOWERS MOTORS

1 PHASE

AO SMITH features a wide variety of ac and blower motors. Air conditionings blowers
Auto Protector, Class "B" Insulation, Lead Reversible, Open Construction, Permanent Split Capacitor, Sleeve Bearing, Ring Adapters.

DESCRIPTION	PART NUMBER
1/4 HP 1075 RPM 3 SPEEDS 208-230V 55/8" OP	D1026
1/3 HP 1075 RPM 3 SPEEDS 208-230V 55/8 OP	D1036
1/2 HP 1075 RPM 3 SPEEDS 208/230V 55/8 OP	D1056
1/2 HP 1075 RPM 3 SPEEDS 115V 55/8 OP	DL1056

CONDENSED FAN MOTORS

All angle operation. Continuous duty, air over drain holes with plugs each end. Energy efficient, electrically reversible. Permanent split capacitor. Sleeve & ball bearing. Thermally protected. Water slinger on shaft. Totally enclosed

1 PHASE

DESCRIPTION	PART NUMBER
1/2 HP 1075 RPM 208-230V	0502
1/2HP 1075 RPM 208-230V	187
1/2 825 RPM 208/230V VERTICAL	741
1/3HP 1075 RPM 208-230V	0501
1/3HP 1075 RPM 208-230V	175
1/3 825 RPM 208/230V VERTICAL	740
1/4HP 1075 RPM 208/230V	0500
1/4HP 1075 RPM 208-230V	176

IEC MOTORS

Efficiency three-phase, 60/50hz voltage 230/460v (60hz); 380-415v (50hz) aluminum frames with removable feet (63 up to 132m) cast iron frames (63 up to 355m/l) squirrel cage

DESCRIPTION	PART NUMBER

PLEASE CALL FOR INFORMATION

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

PUMP MOTORS

We stock a wide variety of pump motors for sprinklers, pools, spas, and all other definite purposes.

56 J FRAME MOTOR

1 PHASE

Permanent Split Capacitor • Switchless • Dripproof • No Base • 3600 RPM • Ball Bearing • 50° C Ambient • 60 Hz • Class B insulated • Rotation (CCW Pump End).

DESCRIPTION	PART NUMBER
1 HP 3450 RPM 1 PH 115/230 Volt 56J FR. ODP A O SMITH	UST1102
1 1/2 HP 3450 RPM 1 PH 115/230 Volt 56J FR. ODP AOSMITH	UST1152
2 HP 3450 RPM 1 PH 230 Volt 56J FR. ODP A O SMITH	UST1202
3/4 HP 3600 RPM 230V FRS56J THREAD A O SMITH	B227SE UST1072
21/2 HP 3600 RPM 230V FRX56J THREA A O SMITH	B231SE UST1252

DESCRIPTION	PART NUMBER
1/2 HP 3600 RPM K56J 115/230 Volt WEG	PCJ105
3/4 HP 3600 RPM K56J 115/230 Volt WEG	PCJ107
1 HP 3600 RPM P K56J 115/230 Volt WEG	PCJ110
11/2 HP 3600 RPM L56J 115/230 Volt WEG	PCJ115
2 HP 3600 RPM 230V M56J WEG	PCJ120
21/2 HP 3600 RPM M56J 230 V WEG	PCJ125

2 SPEEDS

Full Rate • High Service Factor • 40° C Ambient • High Speed Switch less • Low Speed Micro switch •Aluminum "C" Bracket • Hi-Lo Switch Available.

DESCRIPTION	PART NUMBER
1~. 12 HP 3600/1800RPM 230V FRL56J 2SP	B975
1-1/2 ~. 20 HP 3600/1800 RPM 230V	B977
2 ~. 25 HP 3600/1800 RPM 230V N56J FR	B979

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

3 PHASES

Ball Bearing • Continuous Duty • Internal Junction Box • Keyed and Stainless Steel Threaded Shafts • NEMA "56C" Mount • Open Drip Proof • 40° C Ambient • 60 Hz.

DESCRIPTION	PART NUMBER
1/2HP 3450RPM 208-230/460	T3052 H282
1HP 3450RPM 208-230/460V	T3102
11/2HP 3450RPM 208-230/46	T3152
2 HP 36RPM 200-230/460V FRN56J	T3202
3 HP 3450RPM 208-230/460V	T3302/H741

56 Y FRAME MOTOR

1 PHASE

APPLICATIONS: Replacement motor for Sta-Rite, HydroTech, Premier, AquaFlo, Red Jacket, Sears and PAC/FAB brands pumps. Can be used on Sta-Rite, Red Jacket and Sears home waters systems.

FEATURES: All Cooper Winding • Auto Protector • Open Drip proof • No Base • Sealed Ball Bearing • 50º C Ambient • Rotation (CCW Pump End) • Stainless Steel Threaded Shaft.

DESCRIPTION	PART NUMBER
1 HP 3600 RPM 230/115V P56YFR A O SMITH	B853 / USQ1102
1/2 HP 3600 RPM 230/115V P56YFR A O SMITH	B856 / USQ1052
11/2 HP 3600 RPM 230/115V Y56YFR A O SMITH	B854 / USQ1152
2 HP 3600 RPM 230V FRY56Y THREAD A O SMITH	B855 / USQ1202
21/2 HP 3600 RPM 230V Y56YFR A O SMITH	B840 / USQ1252
3 HP 3600 RPM 208-230V 56YFR A O SMITH	B844 / SQ1302
3/4 HP 3600 RPM 230V FRP56Y THREAD A O SMITH	B852 / USQ1072

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

These motors are specially designed for Pool Duty. Available in High Service Factor and Low Service Factor Square-Flange. Aluminum Square Flange, 50 C Ambient, Class "B" insulation, Stainless steel threaded shaft.

DESCRIPTION	PART NUMBER
1/2 HP 3600 RPM K48Y 115/230 VOLT 60 HZ, ODP	PCQ105
3/4 HP 3600 RPM K48Y 115/230 VOLT 60 HZ, ODP	PCQ107
1 HP 3600 RPM K48Y 115/230 VOLT 60 HZ, ODP	PCQ110
11/2 HP 3600 RPM L48Y 115/230 VOLT 60 HZ, ODP	PCQ115
2 HP 3600 RPM 230V M48Y 60 HZ, ODP	PCQ120
21/2 HP 3600 RPM M48Y 230 VOLT 60 HZ, ODP	PCQ125

2 SPEEDS

SQUARE FLANGE POOL MOTORS.
All cooper Windings • High Service Factor • 50º C Ambient • Capacitor Start • Open Drip Proof • Rotation (CCW Pump End). Stainless Steel Threaded Shaft.

DESCRIPTION	PART NUMBER
11/2-1/4HP 3450/1725 RPM 230V, 48Y, ODP	SQS1152R
2-1/3HP 3450/1725 RPM 230V, 48Y, ODP	SQS1202R
.75/.12 3600/1800 RPM 115V 56Y ODP	B981
1/ .16 HP 3600/1800 RPM 230V 56Y ODP	B982

ACE PUMP AND SUPPLY
6013 JOHNSON STREET, HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289
16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278
13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17
E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using BCL easyPDF Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

3 PHASES

SQUARE FLANGE POOL AND SPA PUMP MOTORS.

FEATURES: Squirrel Cage • Dripproof • No Base • Ball Bearing • 50º C Ambient • Class B insulated • 303 Stainless Steel Threaded Shafts.

DESCRIPTION	PART NUMBER
1/2HP 3600 RPM 208-230/460V 56Y ODP	H491/ Q3052
3/4 HP 3600 RPM 208-230/460V 56Y ODP	H492
1 HP 3600 RPM 208-230/460V 56Y ODP	H635
11/2 HP 3600 RPM 208-230/460V 56Y ODP	H636 / Q3152
2 HP 3600 RPM 208-230/460V 56Y ODP	H637 / Q3202
3 HP 3600 RPM 208-230/460V 56Y	H755 / Q3302

CFACE MOTOR

3 PHASES

W21 HIGH EFFICIENCY – GENERAL PURPOSE MOTORS (FOOT MOUNT)
These are designed to meet or exceed all EPAct requirements for energy efficiency as defined by the DOE.
APPLICATIONS: Pumps ● Fans ● Crushers ● Conveyors ● Machine Tools ● Centrifugal machines ● Presses ● Elevators ● Looms ● Grinders ● Woodworking ● Cooling ● Other Severe Duty applications.

FEATURES: II, IV, VI and VIII pole ● Squirrel cage motor ● Ball bearings are supplied as standard ● 1045 Carbon Steel Shaft for Frames up to 365 T ● Class “F” Insulation.

DESCRIPTION	PART NUMBER
2 HP 1800 RPM 145TC FRAME 3PH 208/230-460V TEFC WEG	00218EP3E145TC
2 HP 3600 RPM 145TC FRAME 3PH 208/230-460V TEFC WEG	00236EP3E145TC
3 HP 1800 RPM 182TC FRAME 3PH 208/230-460V TEFC WEG	00318EP3E182TC
3 HP 3600 RPM 182TC FRAME 3PH 208/230-460V TEFC WEG	00336EP3E182TC
5 HP 1800 RPM 184TC FRAME 3PH 208/230-460V TEFC WEG	00518EP3E184TC
5 HP 3600 RPM 184TC FRAME 3PH 208/230-460V TEFC WEG	00536EP3E184TC
7.5 HP 1800 RPM 213TC FRAME 3PH 208/230-460V TEFC WEG	00718EP3E213TC
7.5 HP 3600 RPM 213TC FRAME 3PH 208/230-460V TEFC WEG	00736EP3E213TC
10 HP 1800 RPM 215TC FRAME 3PH 208/230-460V TEFC WEG	01018EP3E215TC
10 HP 3600 RPM 215TC FRAME 3PH 208/230-460V TEFC WEG	01036EP3E215TC
15 HP 1800 RPM 254TC FRAME 3PH 208/230-460V TEFC WEG	01518EP3E254TC
15 HP 3600 RPM 254TC FRAME 3PH 208/230-460V TEFC WEG	01536EP3E254TC
20 HP 1800 RPM 256TC FRAME 3PH 208/230-460V TEFC WEG	02018EP3E256TC

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

DESCRIPTION	PART NUMBER
20 HP 3600 RPM 256TC FRAME 3PH 208/230-460V TEFC WEG	02036EP3E256TC
25 HP 1800 RPM 284TC FRAME 3PH 208/230-460V TEFC WEG	02518EP3E284TC
30 HP 1800 RPM 286TC FRAME 3PH 208/230-460V TEFC WEG	03018EP3E286TC

CFRAME MOTOR

1 PHASE

NEMA-C FLANGE POOL FILTER MOTORS.

All Copper Windings • Auto Protector • Capacitor Start • NEMA "56C" Face Mount • Not Reversible • Open Drip Proof • Rotation (CCWPE) • Sealed Ball Bearings • Sealed Switch Design • "1081" Design • 50º C Ambient • 303 Stainless Shaft (56J & 56C) • 304 Brg. Shaft End.

DESCRIPTION	PART NUMBER
1/2 HP 3600 RPM 230/115V K56CFR	B120 / SK1052
3/4 HP 3600 RPM 230/115V K56CFR	B121 / SK1072
1 HP 3600 RPM 230/115V L56CFR	B122 / SK1102
11/2 HP 3600 RPM 230/115V N56CFR	B123 / SK1152
2 HP 3600RPM 230V M56CFR	B124 / SK1202
3HP 3600RPM 230V P56CFR	B125 / SK1302

JM MOTOR

CLOSE-COUPLED PUMP MOTORS.

1 PHASE

These are specifically designed for operating in environments of dirt, dust and excess moisture. Starting capacitors, all cast iron frames, rigid bases, reversible shaft rotation and oversized ball bearings are all standard features.
APPLICATIONS: Pumps.

FEATURES: II and IV pole 60 Hz. ● Cast Iron Frame ● Squirrel cage rotor / Aluminum die cast ● Ball bearings ● Class "F" insulation ● Service Factor: 1.15 ● Continuous Duty (S1) ● 104º F (40º C) Ambient ● 1045 carbon steel shaft ● F1 Mount ● Stainless steel nameplate.

DESCRIPTION	PART NUMBER
2 HP 1800 RPM 145 JM 208-230/460 Volt TEFC	00218ES1E145JM
2 HP 3600 RPM 145 JM 208-230/460 Volt TEFC	00236ES1E145JM
3 HP 1800 RPM 184 JM 208-230/460 Volt TEFC	00318ES1E184JM
3 HP 3600 RPM 145 JM 208-230/460 Volt TEFC	00336ES1E145JM
5 HP 1800 RPM 184 JM 208-230/460 Volt TEFC	00518ES1E184JM

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

DESCRIPTION	PART NUMBER
5 HP 3600 RPM 184 JM 208-230/460 Volt TEFC	00536ES1E184JM
7.5 HP 1800 RPM 215 JM 208-230/460 Volt TEFC	00718ES1E215JM
7.5 HP 3600 RPM 213 JM 208-230/460 Volt TEFC	00736ES1E213JM
10 HP 1800 RPM 215 JM FR 208-230/460 Volt TEFC	01018ES1E215JM
10 HP 3600 RPM 215 JM FR 208-230/460 Volt TEFC	01036ES1E215JM

3 PHASES

The ODP motors are suitable where dirt and moisture are at a minimum.

APPLICATIONS: Water pumping ● Process ● Transfer and Circulating pumps.

FEATURES: II and IV pole ● Squirrel cage motor ● Class "F" Insulation ● Service Factor: 1.15 ● Continuous duty ● 104º F (40º C) Ambient ● Stainless Steel name plate ● 1045 carbon steel shaft ● F1 mount.

DESCRIPTION	PART NUMBER
3HP 3600 RPM 145JM FR. 3PH 208-230/460V ODP	00336OS3E145JM
3HP 1800 RPM 182JM FR. 3PH 208-230/460V ODP	00318OS3E182JM
3HP 1800 RPM 182JM FR. 3PH 208-230/460V TEFC	00318ES3E182JM
3HP 3600 RPM 145JM FR. 3PH 208-230/460V TEFC	00336ES3E145JM
5HP 3600 RPM 182JM FR. 3PH 208-230/460V ODP	00536OS3E182JM
5HP 1800 RPM 184JM FR. 3PH 208-230/460V ODP	00518OS3E184JM
5HP 1800 RPM 184JM FR. 3PH 208-230/460V TEFC	00518ES3E184JM
5HP 3600 RPM 182JM FR. 3PH 208-230/460V TEFC	00536ES3E182JM
7.5HP 3600 RPM 184JM FR. 3PH 208-230/460V ODP	00736OS3E184JM
7.5HP 1800 RPM 213JM FR. 3PH 208-230/460V TEFC	00718ES3E213JM
7.5HP 1800 RPM 213JM FR. 3PH 208-230/460V ODP	00718OS3E213JM
10HP 3600 RPM 213JM FR. 3PH 208-230/460V ODP	01036OS3E213JM
10HP 1800 RPM 215JM FR. 3PH 208-230/460V ODP	01018OS3E215JM
10HP 1800 RPM 215JM FR. 3PH 208-230/460V TEFC	01018ES3E215JM
10HP 3600 RPM 213JM FR. 3PH 208-230/460V TEFC	01036ES3E213JM
15HP 3600 RPM 215JM FR. 3PH 208-230/460V ODP	01536OS3E215JM
15HP 1800 RPM 254JM FR. 3PH 208-230/460V ODP	01518OS3E254JM
15HP 1800 RPM 254JM FR. 3PH 208-230/460V TEFC	01518ES3E254JM
15HP 3600 RPM 215JM FR. 3PH 208-230/460V TEFC	01536ES3E215JM
20HP 3600 RPM 254JM FR. 3PH 208-230/460V ODP	02036OS3E254JM
20HP 1800 RPM 256JM FR.3PH 208-230/460V ODP	02018OS3E256JM
20HP 1800 RPM 256JM FR. 3PH 208-230/460V TEFC	02018ES3E256JM
20HP 3600 RPM 254JM FR. 3PH 208-230/460V TEFC	02036ES3E254JM
25HP 3600 RPM 256JM FR. 3PH 208-230/460V TEFC	02536ES3E256JM
25HP 1800 RPM 284JM FR. 3PH 208-230/460V TEFC	02518ES3E284JM
25HP 1800 RPM 284JM FR. 3PH 208-230/460V ODP	02518OS3E284JM
25HP 3600 RPM 256JM FR. 3PH 208-230/460V ODP	02536OS3E256JM
30HP 1800 RPM 286JM FR. 3PH 208-230/460V ODP	03018OS3E286JM
30HP 1800 RPM 286JM FR. 3PH 208-230/460V TEFC	03018ES3E286JM

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

DESCRIPTION	PART NUMBER
30HP 3600 RPM 284JM FR. 31PH 208-230/460V ODP	03036OS3E284JM
30HP 3600 RPM 284JM FR. 3PH 208-230/460V TEFC	03036ES3E284JM

JP MOTOR

1 PHASE

(Similar to "JM" TYPE)

DESCRIPTION	PART NUMBER
2HP 1800 RPM 145JP FR. 1PH 208-230/460V TEFC	00218ES1E145JP
2HP 3600 RPM 145JP FR. 1PH 208-230/460V TEFC	00236ES1E145JP
3HP 1800 RPM 184JP FR. 1PH 208-230/460V TEFC	00318ES1E184JP
3HP 3600 RPM 145JP FR. 1PH 208-230/460V TEFC	00336ES1E145JP
5HP 1800 RPM 184JP FR. 1PH 208-230/460V TEFC	00518ES1E184JP
5HP 3600 RPM 184JP FR. 1PH 208-230/460V TEFC	00536ES1E184JP
7.5HP 1800 RPM 215JP FR. 1PH 208-230/460V TEFC	00718ES1E215JP
7.5HP 3600 RPM 213JP FR. 1PH 208-230/460V TEFC	00736ES1E213JP
10HP 1800 RPM 215JP FR. 1PH 208-230/460V TEFC	01018ES1E215JP
10HP 3600 RPM 215JP FR. 1PH 208-230/460V TEFC	01036ES1E215JP

3 PHASES

(Similar to "JM" TYPE)

DESCRIPTION	PART NUMBER
3HP 1800 RPM 182JP FR. 3PH 208-230/460V ODP	00318OS3E182JP
3HP 1800 RPM 182JP FR. 3PH 208-230/460V TEFC	00318ES3E182JP
3HP 3600 RPM 145JP FR. 3PH 208-230/460V ODP	00336OS3E145JP
3HP 3600 RPM 145JP FR. 3PH 208-230/460V TEFC	00336ES3E145JP
5HP 1800 RPM 184JP FR. 3PH 208-230/460V ODP	00518OS3E184JP
5HP 1800 RPM 184JP FR. 3PH 208-230/460V TEFC	00518ES3E184JP
5HP 3600 RPM 182JP FR. 3PH 208-230/460V ODP	00536OS3E182JP
5HP 3600 RPM 182JP FR. 3PH 208-230/460V TEFC	00536ES3E182JP
7.5HP 1800 RPM 213JP FR. 3PH 208-230/460V ODP	00718OS3E213JP
7.5HP 1800 RPM 213JP FR. 3PH 208-230/460V TEFC	00718ES3E213JP
10HP 1800 RPM 215JP FR. 3PH 208-230/460V ODP	01018OS3E215JP
10HP 1800 RPM 215JP FR. 3PH 208-230/460V TEFC	01018ES3E215JP
10HP 3600 RPM 213JP FR. 3PH 208-230/460V ODP	01036OS3E213JP
10HP 3600 RPM 213JP FR. 3PH 208-230/460V TEFC	01036ES3E213JP
15HP 1800 RPM 254JP FR. 3PH 208-230/460V ODP	01518OS3E254JP
15HP 1800 RPM 254JP FR. 3PH 208-230/460V TEFC	01518ES3E254JP
15HP 3600 RPM 215JP FR. 3PH 208-230/460V ODP	01536OS3E215JP
15HP 3600 RPM 215JP FR. 3PH 208-230/460V TEFC	01536ES3E215JP
20HP 1800 RPM 256JP FR. 3PH 208-230/460V ODP	02018OS3E256JP

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

DESCRIPTION	PART NUMBER
20HP 1800 RPM 256JP FR. 3PH 208-230/460V TEFC	02018ES3E256JP
20HP 3600 RPM 254JP FR. 3PH 208-230/460V ODP	02036OS3E254JP
20HP 3600 RPM 254JP FR. 3PH 208-230/460V TEFC	02036ES3E254JP
25HP 1800 RPM 284JP FR. 3PH 208-230/460V ODP	02518OS3E284JP
25HP 1800 RPM 284JP FR. 3PH 208-230/460V TEFC	02518ES3E284JP
25HP 3600 RPM 256JP FR. 3PH 208-230/460V ODP	02536OS3E256JP
25HP 3600 RPM 256JP FR. 3PH 208-230/460V TEFC	02536ES3E256JP
30HP 1800 RPM 286JP FR. 3PH 208-230/460V ODP	03018OS3E286JP
30HP 1800 RPM 286JP FR. 3PH 208-230/460V TEFC	03018ES3E286JP
30HP 3600 RPM 284JP FR. 3PH 208-230/460V ODP	03036OS3E284JP
30HP 3600 RPM 284JP FR. 3PH 208-230/460V TEFC	03036ES3E284JP

SPA MOTOR

ABOVE GROUND SWIMMING POOL PUMP MOTORS

APPLICATIONS: Spa ● above ground swimming pool and jetted tub pumps.

FEATURES: Split Phase and Capacitor Start ● Dripproof ● Ball Bearing ● Rigid Base and No Base ● 40ºC Ambient ● Class B insulated ● Rotation (CCW Pump End) ● Through Bolt Mount.

DESCRIPTION	PART NUMBER
1/2 HP 3600 RPM 115V FRV48Y ODP 1 PHASE	BN23
3/4 HP 3600 RPM 115V FRV48Y ODP 1 PHASE	BN24SS
1 HP 3600 RPM 115V FRW48Y ODP 1 PHASE	BN25SS
1 1/2-.18 HP 3600/1800 RPM 230V U48YFR 2 SPEED 1 PHASE	BN34
11/2 HP 3600 RPM 230/115V FRR48Y ODP	BN35
3/4-.10HP 3450/1725 RPM 1PH 115V 48Y FR. 2 SPEED	BN36
1-.12HP 3450/1725 RPM 1PH 115V 48Y FR. 2 SPEED	BN37
2HP 3450 RPM 1PH 115/230V 48Y FR.	BN40
3HP 3450 RPM 1PH 230V 48Y FR.	BN41
11/2-.25HP 3450/1725 RPM 1PH 115V 48Y FR. 2 SP	BN50
2-.25HP 3450/1725 RPM 1PH 230V 48Y FR. 2 SPEED	BN51

TCZ MOTOR

DESCRIPTION	PART NUMBER	PRICE

PLEASE CALL FOR INFORMATION

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image

ELECTRIC MOTORS

VERTICAL HOLLOW SHAFT MOTOR

Vertical hollow shaft motors are designed primarily for deep well turbine pump application.
The coupling is equipped with a non-reverse ratchet, which prevents motor rotation from backspin at shutdown.
These motors are built to NEMA standards and have special bearing arrangements to carry heavy thrust loads

DESCRIPTION	PART NUMBER

****PLEASE CALL FOR INFORMATION****

WASHDOWN DUTY/SHARK MOTOR

3 PHASES

For food processing, pharmaceutical and other environments requiring extreme cleanliness and frequent wash downs, WEG offers a new design all-stainless steel motor, called the SHARK.

APPLICATIONS: Washdown application ● Food Processing ● Chemical Processing ● Pharmaceuticals ● Poultry Processing ● Meat Processing ● Dairy Applications ● Bakeries ● Snack Foods ● Bottling ● Corrosive Environment.

FEATURES: High Quality 304 seamless stainless tube frame ● Premium quality 6200 series bearings ● Inverter Duty Wire ● VPI with Epoxy encapsulated windings ● High Efficiency design ● Class " F" insulation materials ● 1.15 Service Factor.

DESCRIPTION	PART NUMBER
1HP 1800 RPM 3PH 208-230/460V 56C FRAME	00118EP3ESS56C
1HP 3600 RPM 3PH 208-230/460V 56C FRAME	00136EP3ESS56C
1.5HP 3600 RPM 3 PH208-230/460V 56C FRAME	00156EP3ESS56C
2HP 1800 RPM 3PH 208-230/460V 56C FRAME	00218EP3ESS56C
2HP 3600 RPM 3 PH 208-230/460V 56C FRAME	00236EP3ESS56C
3HP 1800 RPM 3PH 208-230/460V 182TC FRAME	00318EP3ESS182T
3HP 3600 RPM 3PH 208-230/460V 145TC FRAME	00336EP3ESS145T

ACE PUMP AND SUPPLY

6013 JOHNSON STREET,
HOLLYWOOD, FL-33024
PHONE: 954-981-7424
FAX: 954-963-2289

16600 NW 54 AVE, BAY 1
MIAMI, FL-33014
PHONE: 305-621-0020
FAX: 305-621-9278

13500 SW 128 STREET, BAY 102
MIAMI, FL-33186
PHONE: 786-573-1
FAX: 786-573-17

E-MAIL: acepump@compuserve.com
www.acepumpandsupply.

created using
BCL easyPDF
Printer Driver
Click here to purchase a license to remove this image